


STATE	STACK HEIGHT
FREE 1	0.0780
INSTALLED 2	0.0780

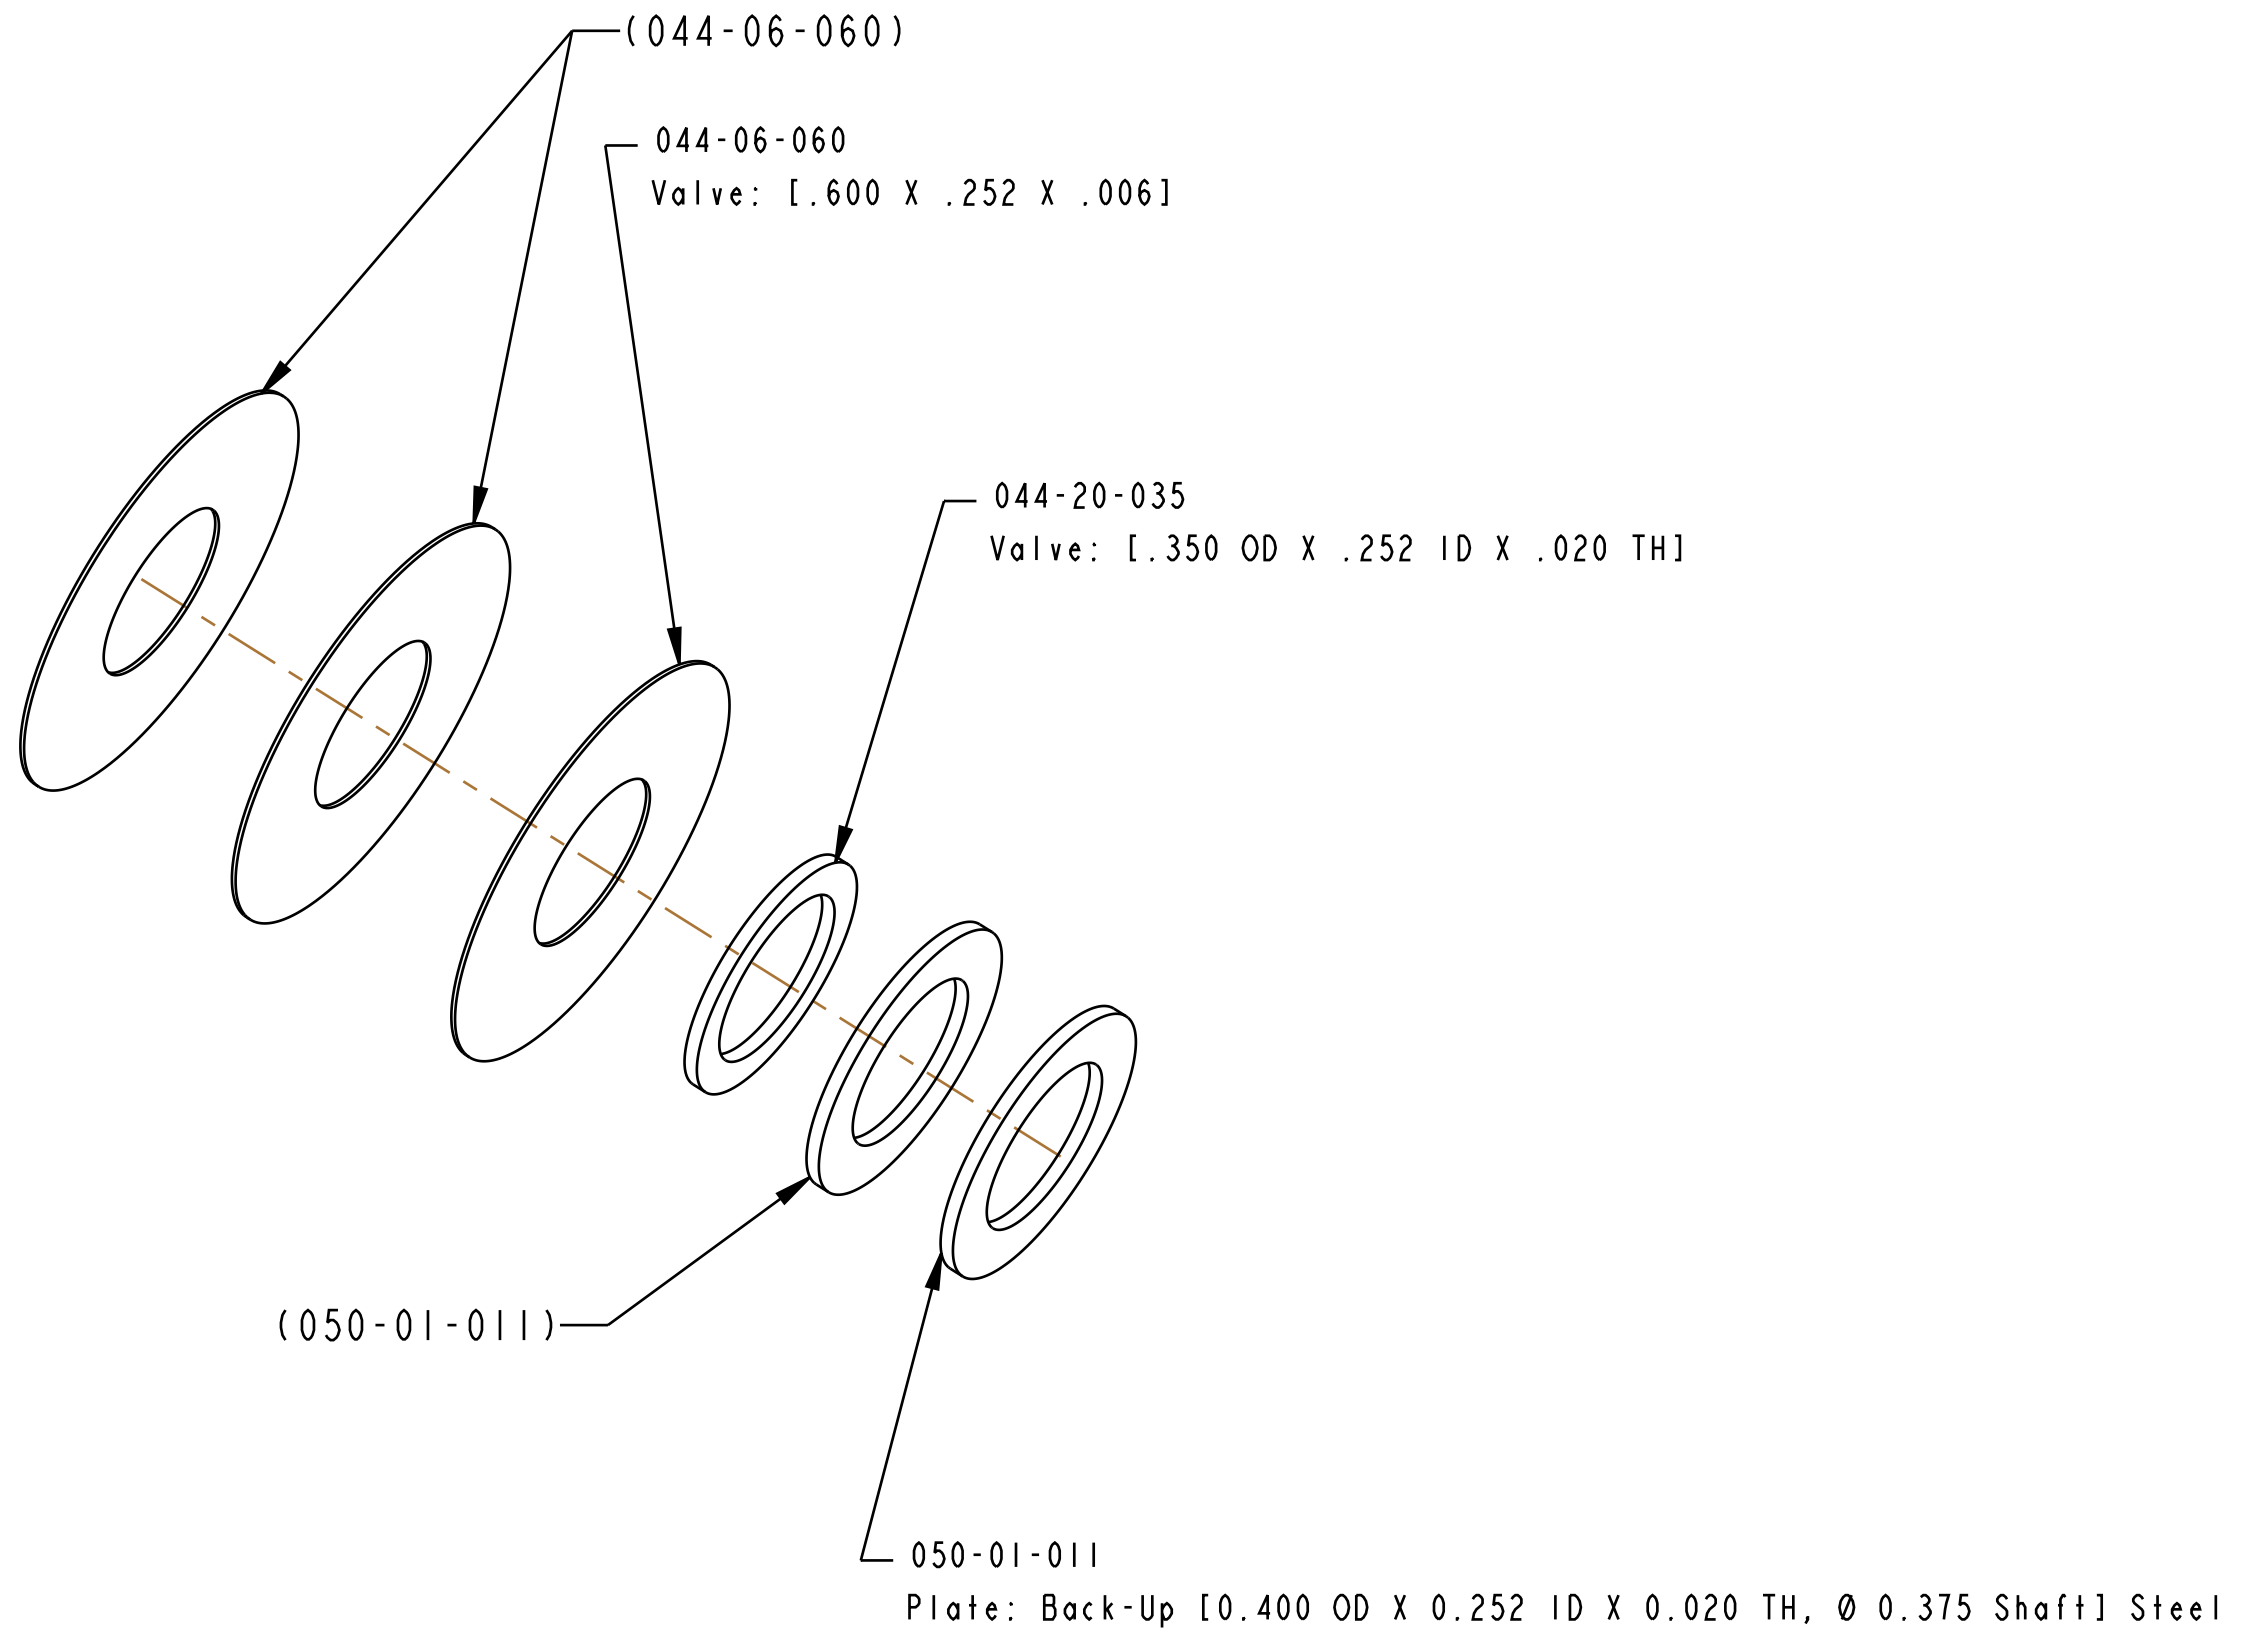

NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1 FREE STATE REQUIRES MEASUREMENT WITH MINIMAL FORCE APPLIED FROM THE MEASUREMENT DEVICE. WHEN A RING SHIM IS PRESENT, THE MEASUREMENT DEVICE MUST SPAN BOTH SIDES OF THE RING SHIM.
- 2 INSTALLED STATE REQUIRES COMPRESSING THE VALVE STACK TO SOLID HEIGHT USING COMPRESSION INTERFACES THAT ARE NO LARGER IN DIAMETER THAN THE MINIMUM VALVE DIAMETER.
- 3 FREE STATE AND INSTALLED STATE VALUES WILL BE IDENTICAL WHEN NO RING SHIM IS PRESENT.

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc.		Ph 831-768-1100 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312
Valve Stack Assy: 2018 FLOAT DPX2, Linear Rebound Medium, LRM		
SIZE C	DWG. NO. 805-05-362-KIT	
PLOT SCALE 1:1:1		SHEET 1 OF 1