

4

3

2

1

D

D

C


C

B

B

A

A

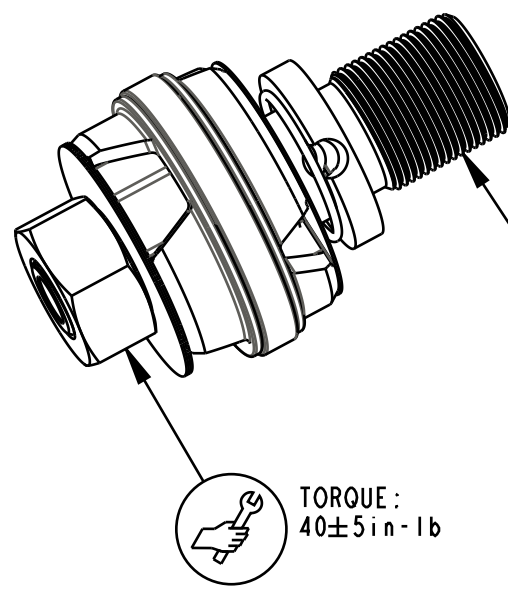

LOCTITE:
RED 263, 2-3 DROPS
360° COVERAGE *

820-03-525-KIT
2019 Grip, All, Bearing Housing Assy

APPLY BLUE MARINE GREASE
TO THREADS ON ALUMINUM
REBOUND NEEDLES ONLY

229-10-270
Shaft, 10mm Damper, Hard Ano, Grip, 34 LC All

210-22-958
Damping Adj Part: Base Stud, M8, Grip

029-08-022
Seals: O-Ring [8.0MM ID x 1.0MM CS]
Metric, N-70, Static

TORQUE:
40±5 in-lb

LOCTITE:
RED 263, 2-3 DROPS
360° COVERAGE *


010-01-012
Ball [Ø.1094]

039-00-243
Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

210-03-230
Damping Adj Part: Needle, Rbd, Injection Molded, 34 LC All

820-03-330-KIT
2017 Grip Rebound Piston Assy

SEE DETAIL Z

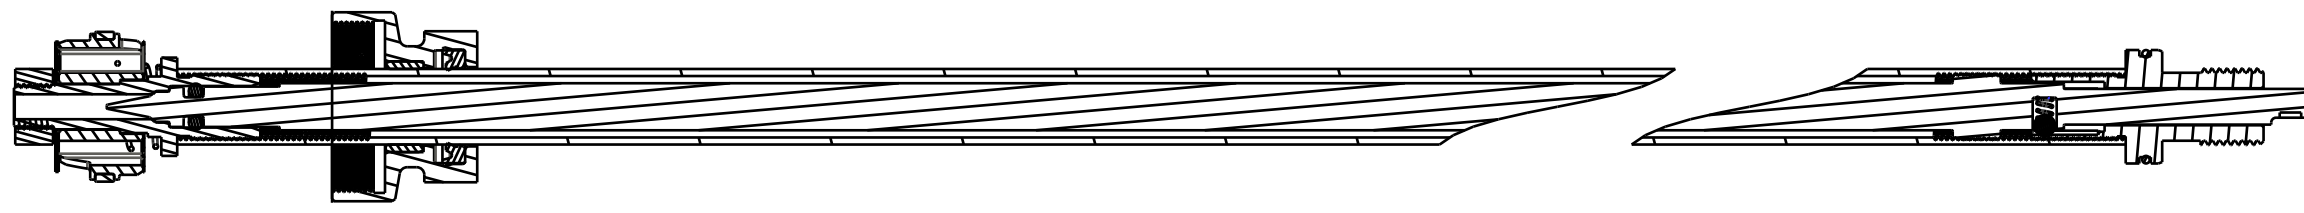

029-03-005
O-Ring (-005) [.070 C.S. X 0.101 ID]

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX		FOX Factory, Inc.		Ph 831-768-1100
TITLE		130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312
		2019 Rhythm 34 27.5 & 29		
		130-150, Grip Damper Shaft Assy		
SIZE	DWG. NO.	820-03-578-KIT		
C				
PLOT SCALE	1:1	SHEET 1 OF 1		ProE ASSEM

4

3

2

1

ProE ASSEM