

210-24-371
Butterfly Valve, FIT4, Large Tabs

010-01-012
Ball [Ø.1094]

038-01-071
Retaining Ring: Wire [0.340 OD X 0.024" Wire] 17-7 SST

222-01-307
Piston, Compression, FIT4, Dished, Aluminum

210-24-350
Shaft, Compression Selector, 2018 FIT4 Remote

210-22-919
Compression Adjust Needle, F-S, FIT4

GREASE:
THIN LAYER
OF SLICK HONEY

210-22-921
Lockout Selector, F-S, FIT4


210-22-920
Compression Adjust Coupler, F-S, FIT4

039-00-241
Spring: Wave [.322 ID x .420 OD, 3 Waves] SS

210-24-316
Bearing, Thrust, Teflon, FIT4, Selector Shaft, 2018

029-08-068
Seals: O-Ring [3.0MM ID x 1.5MM CS] Metric, N-70, Static

010-01-012
Ball [Ø.1094]

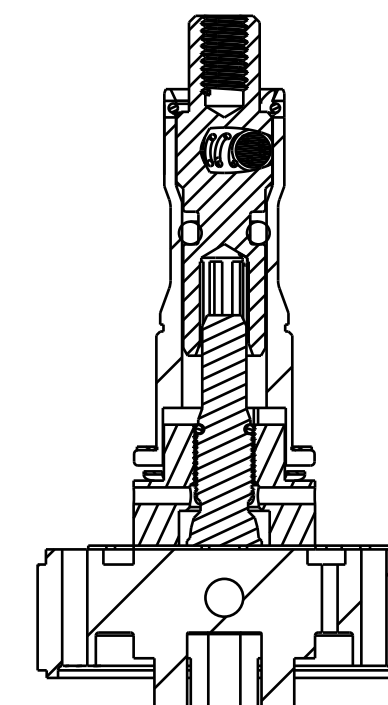

039-00-243
Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

038-01-073
Retaining Ring: Wire [.280 OD X .024 CS] SS

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
2018 FIT4 LIGHTWEIGHT F-S
TOP CAP PARTS, REMOTE, U-CUP, P-L

SIZE DWG. NO. **820-03-539-KIT**

PLOT SCALE 2.00:1

SHEET 1 OF 1