


4

3

2

1

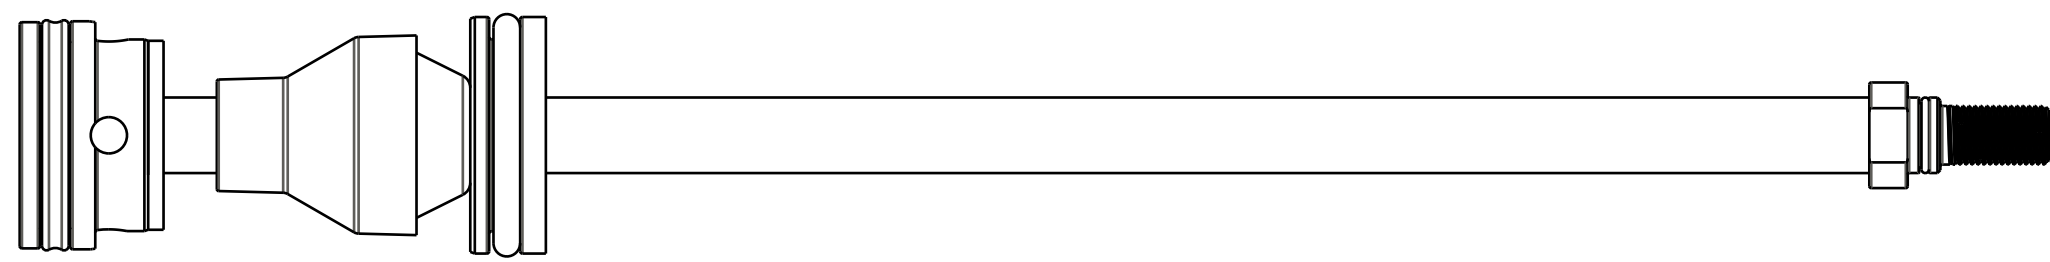

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

029-08-022

234-04-655

029-08-060

TORQUE:
50±5 IN.LB.

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-470-KIT
Neg Plate Subassembly, 2019,
34 Rhythm SPD-PED-ELEC

IMPORTANT:
GROOVE FACES
PISTON

234-04-629

Topout Bumper, FLOAT NA

234-04-739

Topout Spacer, Float, Rhythm

SHAFTS

GREASE:
THIN LAYER
OF SLICK HONEY

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

018-05-057

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

060-01-010

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

222-01-322

Piston, FLOAT Air Spring, 32 Rhythm, 2018

035-00-212

Seals: Q-Ring [(-212) 0.139 C.S. X 0.859 ID]

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE			
2020 Air Shaft Assemblies, Marzocchi			
Z2 34 E-Bike+ 100-150, FLOAT			
SIZE	DWG. NO.		
C			
PLOT SCALE .00 : 1		SHEET OF 1	

4

3

2

ProE ASSEM