


4


3

2

1



IMPORTANT:  
NOTE ORIENTATION OF  
U-CUP SEALS

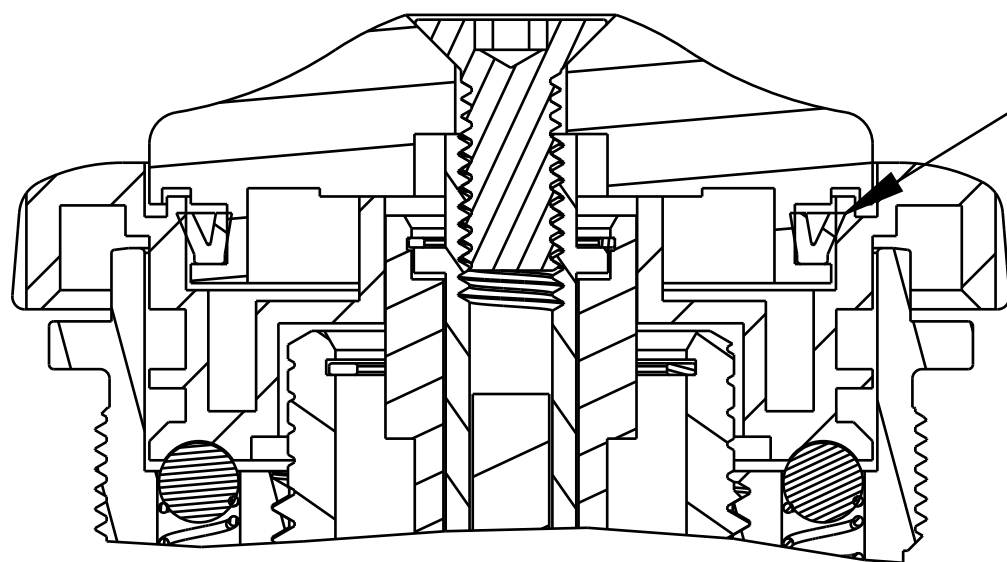

241-00-020  
Fastener, Custom: Cover, Nut 011 RC2

210-03-120  
Knob, Rebound, 2011 36\_40

Seals: O-Ring [15mm ID x 1.5mm CS] Metric, N-70, Static

241-00-022  
Fastener, Custom: Nut, Bottom, 011 RC2

241-01-011  
Fastener, Custom: Crush Washer, Plastic, 13mm



TORQUE:  
11±3 IN.LB.




TORQUE:  
50±5 IN.LB.



GREASE:  
THIN LAYER  
OF SLICK HONEY

018-01-007

Socket Set Half Dog Point Screw [#8-32 X 0.250 TLG]



OIL:  
40CC OF FOX 20 WT OIL (025-03-009)  
FOR OIL BATH

Cartridge Assy, 2011 36 180 RC2 NBO



GREASE:  
THIN LAYER  
OF SLICK HONEY

(010-01-000)

(039-00-005)



GREASE:  
THIN LAYER ON  
MATING KNOB SURFACES



GREASE:  
THIN LAYER



TORQUE:  
220±5 IN.LB.

039-00-005

Spring: [0.125 TLG X 0.125 OD X 36.45 lbs/in]



GREASE:  
THIN LAYER  
OF SLICK HONEY

010-01-000

Ball [Ø 0.1250] Steel



TORQUE:  
11±3 IN.LB.

210-03-194

Knob, High Speed, Compression, 2014 RC2

036-01-074

Seal: U-Cup, Shore 70A, 2014 RC2, Low-Speed

210-03-193

Knob, Low Speed, Compression, 2014 RC2

019-01-060

Fastener, Standard (Metric): Screw [M4 X 10mm] Socket Flathead, Patchlock



FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
2011 36 170-180 NBO RC2  
COMPLETE CARTRIDGE ASSEMBLY

SIZE DWG. NO.  
C 820-08-096-KIT

PLOT SCALE 0.50:1 SHEET 1 OF 1

PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM