

4

3

2

1

D

D

C

C

B

B

A

A

IMPORTANT:
ENSURE VALVES ARE NOT
PINCHED DURING ASSEMBLY

DETAIL A
SCALE 2.000

GREASE:
THIN LAYER OF SLICK HONEY
ON BULLET TOOL

GREASE:
THIN LAYER
OF SLICK HONEY

029-08-026
Seals: O-Ring [2.0 MM ID x 1.5 MM CS] Metric, N-60, Static

820-03-464-KIT
2016 FIT4 Bearing Housing Assy

229-10-137
DAMPER SHAFT

210-22-897
REBOUND ADJUST NEEDLE

039-00-344
Spring: Detent [.12 TLG X .094 OD X 236 lb/in] SS

010-01-012
Ball [Ø.1094]

GREASE:
THIN LAYER
BLUE MARINE GREASE

210-22-755
BASE STUD

029-08-047
BASE STUD O-RING

GREASE:
THIN LAYER
OF SLICK HONEY


TORQUE:
30±5 IN. LB.

LOCTITE:
ONE DROP
RED 262

SEE DETAIL A

820-03-465-KIT
REBOUND PISTON ASSY

TORQUE:
30±5 IN. LB.

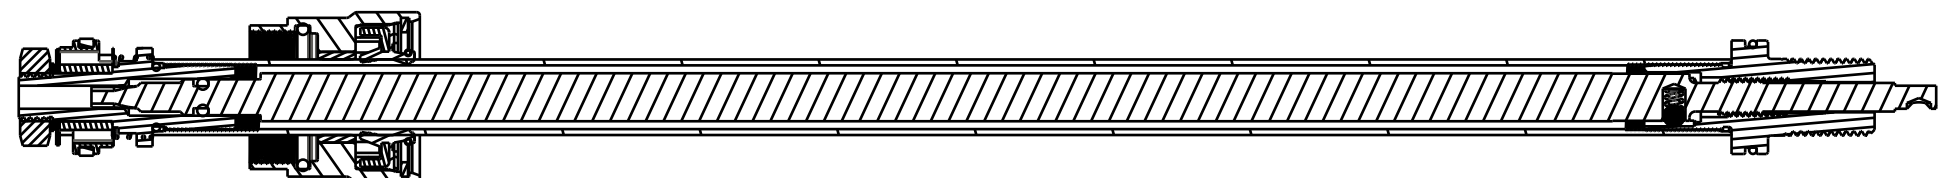

SECTION A-A

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.		Ph 831-768-1100
TITLE		130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312
		2016 34mm FIT4 Damper Shaft Assy		
SIZE	DWG. NO.	820-03-469-KIT		
C				
PLOT SCALE	.00:1	SHEET 1 OF 1		