


4

3

2

1

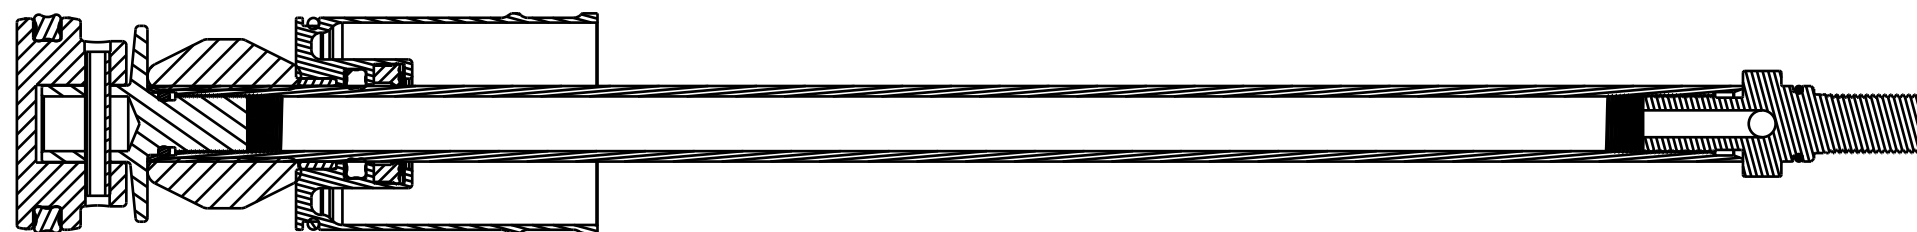

SECTION A-A

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: FLOAT NA 2, External Thread, Vented

029-08-022

234-04-913

GREASE:  
THIN LAYER  
OF SLICK HONEY

TORQUE:  
50±5 IN.LB.

NEG PLATE SUBASSEMBLY

234-04-629  
Topout Bumper, FLOAT NA

LOCTITE:  
1-2 DROPS  
RED 262

SHAFT, INTERNALLY THREADED

TORQUE:  
50±5 IN.LB.

GREASE:  
THIN LAYER  
OF SLICK HONEY

GREASE:  
THIN LAYER  
OF SLICK HONEY

LOCTITE:  
1-2 DROPS  
RED 262

029-08-060  
Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

NOTE: PRESS IN PIN UNTIL CENTERED

060-01-002  
Pin: Spring [Ø 0.125 X 0.750 TLG] Spring Steel, Zinc

222-01-284  
PISTON, FLOAT NA 2

NOTE: VERIFY SEAL IS NOT TWISTED AFTER INSTALL

035-06-213  
SEAL: Q-RING

**FOX** FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**Air Shaft Assy, Short Travel,  
FLOAT NA 2, 34mm**

SIZE DWG. NO.

C

PLOT SCALE | .00:1 |

SHEET 1 OF 1

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM