

SCALE 2:1

210-22-311  
Damp Adj Part: Screw, Rebound Adjust, 010 RL\_RLC

029-08-004  
O-Ring [3.0MM ID x 1.0MM C.S.]

210-22-312  
Lower Damper Shaft Insert, 010 RL\_RLC

029-08-068  
O-Ring [3.0MM ID x 1.5MM CS]

GREASE:  
THIN LAYER  
OF SLICK HONEY

GREASE:  
THIN LAYER  
OF SLICK HONEY

GREASE:  
THIN LAYER  
OF SLICK HONEY


029-08-022  
O-Ring [8.0MM ID x 1.0MM CS]

039-00-029  
Spring: [0.125 TLG X 0.125 OD X 50.00 lbs/in]

010-01-000  
Ball [Ø 0.1250] Steel


018-01-006  
Screw, Set [#8-32 X .093 L] Cup Pt, Nyllok

TIGHTEN UNTIL FLUSH

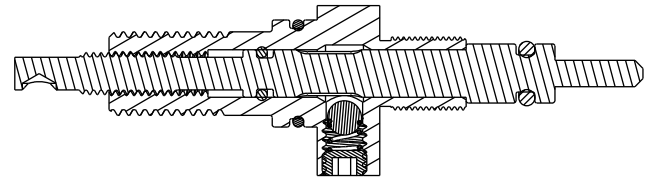

SECTION A-A

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOR PROPRIETARY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

 <b>FOX Factory, Inc.</b> <small>130 Hanger Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312</small>	
<b>010 RL_RLC Rebound Adjuster Assy</b>	
TITLE <b>C</b>	DWG. NO. <b>820-03-135-KIT</b>
PLOT SCALE 3.00:1	SHEET 1 OF 1