

APPLY BLUE MARINE GREASE TO THREADS ON ALUMINUM REBOUND NEEDLES

GREASE: THIN LAYER OF SLICK HONEY

LOCTITE: 2-3 DROPS RED 263 OR FEMALE THREADS

029-08-022 Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

TORQUE: 40±5 IN.LB.

210-22-958 Damping Adj Part: Base Stud, M8, Grip

010-01-012 Ball [Ø.1094]

039-00-243 Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

Rebound Needles:  
 210-03-231: Damping Adj Part: Needle, Rbd, Injection Molded, 32 27.5  
 210-03-232: Damping Adj Part: Needle, Rbd, Injection Molded, 32 29 All


029-03-005 O-Ring (-005) [.070 C.S. X 0.101 ID]

820-03-476-KIT 2016 FIT4 Bearing Housing Assy

Damper Shafts:  
 229-10-271: Shaft, 10mm Damper, Hard Ano, Grip, 32 27.5  
 229-10-272: Shaft, 10mm Damper, Hard Ano, Grip, 32 29 All

Rebound Piston Assemblies:  
 820-03-458-KIT: 2017 Grip Rebound Piston Assy, Short Travel  
 820-03-330-KIT: 2017 Grip Rebound Piston Assy

TORQUE: 40±5 IN.LB.

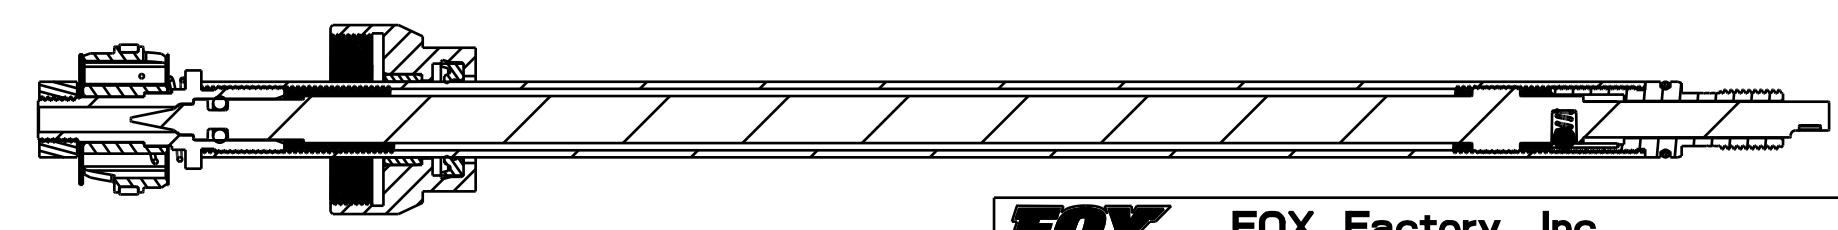

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** FOX Factory, Inc. Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE: 2017 32mm 27.5in/29in Damper Shaft Assemblies

SIZE DWG. NO. C

PLOT SCALE | .00 : 1 | SHEET | OF | 1