


4

3

2

1

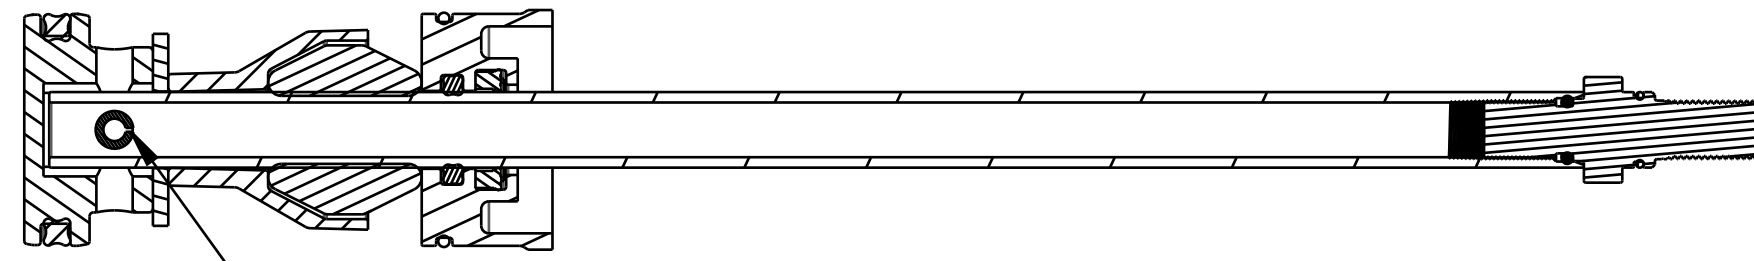

! IMPORTANT:
ORIENT GAP IN PIN TOWARDS
TOPOUT SPACER ±15°

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

234-04-655
Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

234-04-629
Topout Bumper, FLOAT NA

029-08-060

029-08-022

234-04-738
Topout Spacer, FLOAT NA 2, 0.040" Thick, Aluminum

035-00-213
Seals: Q-Ring [(-213) .139 C.S. X 0.921 ID]

222-01-333
Piston, FLOAT NA 2 LC, 34, 1.214 Bore

LOCTITE:
1-2 DROPS
RED 262

NO LOCTITE ON O-RING GLANDS

TORQUE:
50±5 IN LB

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-413-KIT
Neg Plate Subassembly, 2018 FLOAT LC NA 2, 34, Long Travel, 1.214 Bore

234-04-739
Topout Spacer, Float, Rhythm

Shafts:

- 230-17-004: Shaft, FLOAT Air Spring, NA 2 LC, 110mm
- 230-17-005: Shaft, FLOAT Air Spring, NA 2 LC, 120mm
- 230-17-006: Shaft, FLOAT Air Spring, NA 2 LC, 130mm
- 230-17-007: Shaft, FLOAT Air Spring, NA 2 LC, 140mm
- 230-17-008: Shaft, FLOAT Air Spring, NA 2 LC, 150mm
- 230-17-009: Shaft, FLOAT Air Spring, NA 2 LC, 160mm

! IMPORTANT:
PRESS PIN UNTIL CENTERED

060-01-010
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

! IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

FOX Factory, Inc.
130 Hangar Way, Watsonville, CA 95076 USA
Ph 831-768-1100 Fax 831-768-9312

TITLE
**2018 34mm 110-160 FLOAT
NA2 Air Shaft Assemblies**

SIZE DWG. NO.
C
PLOT SCALE 1:1:1 SHEET 1 OF 1

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM