
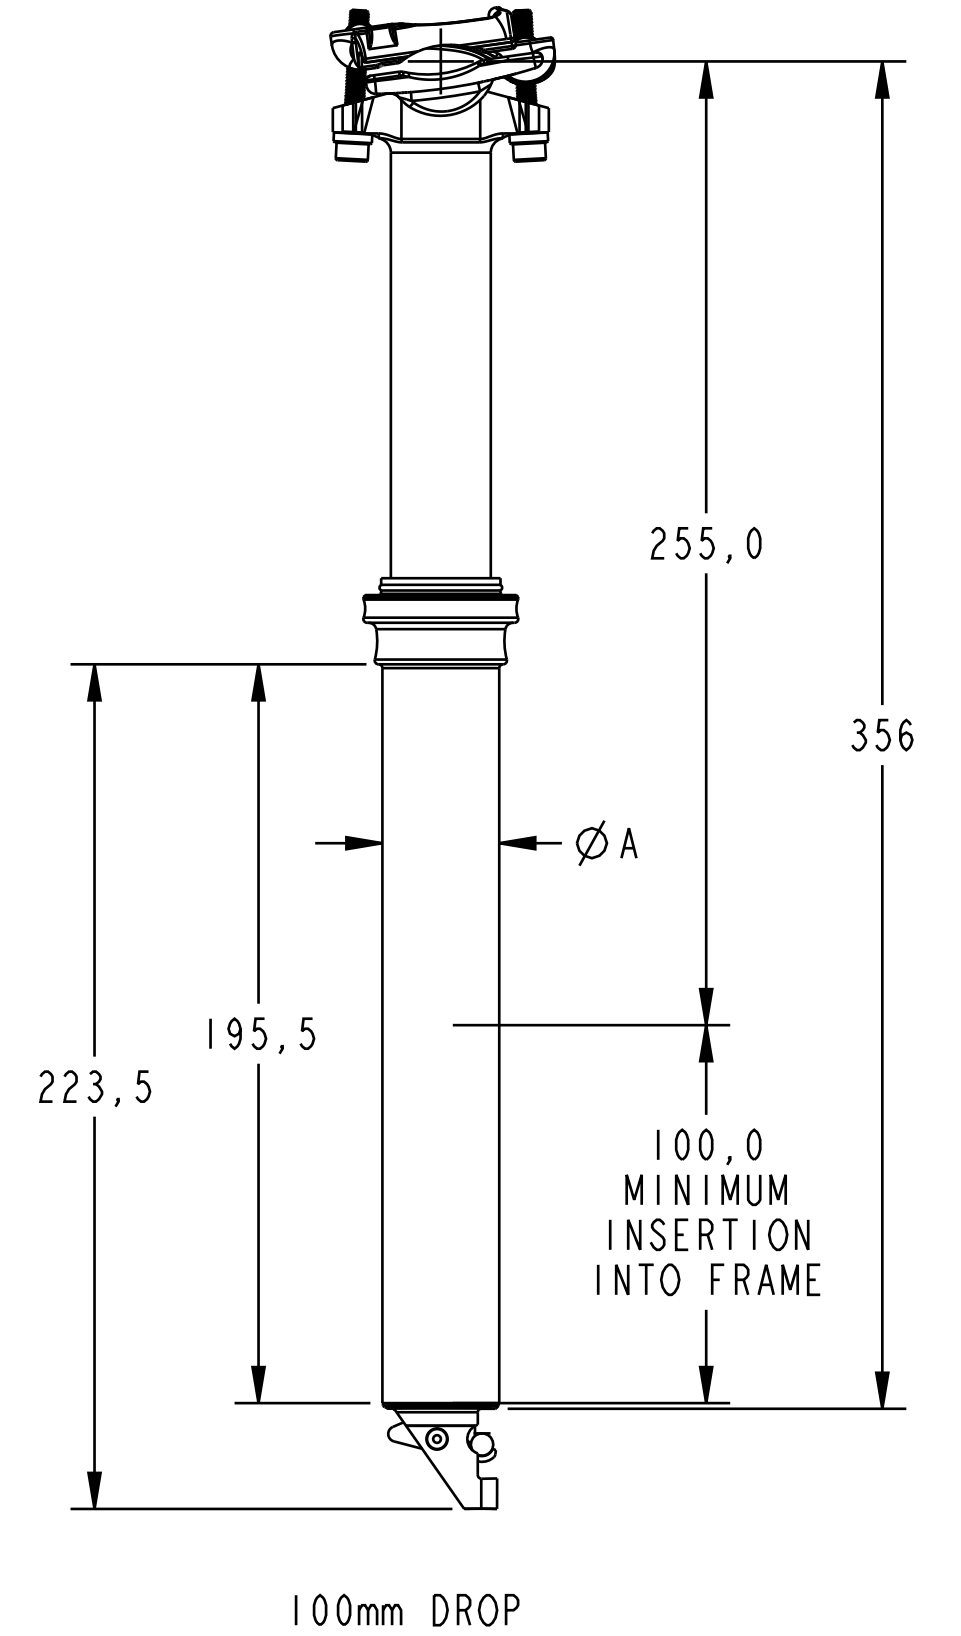
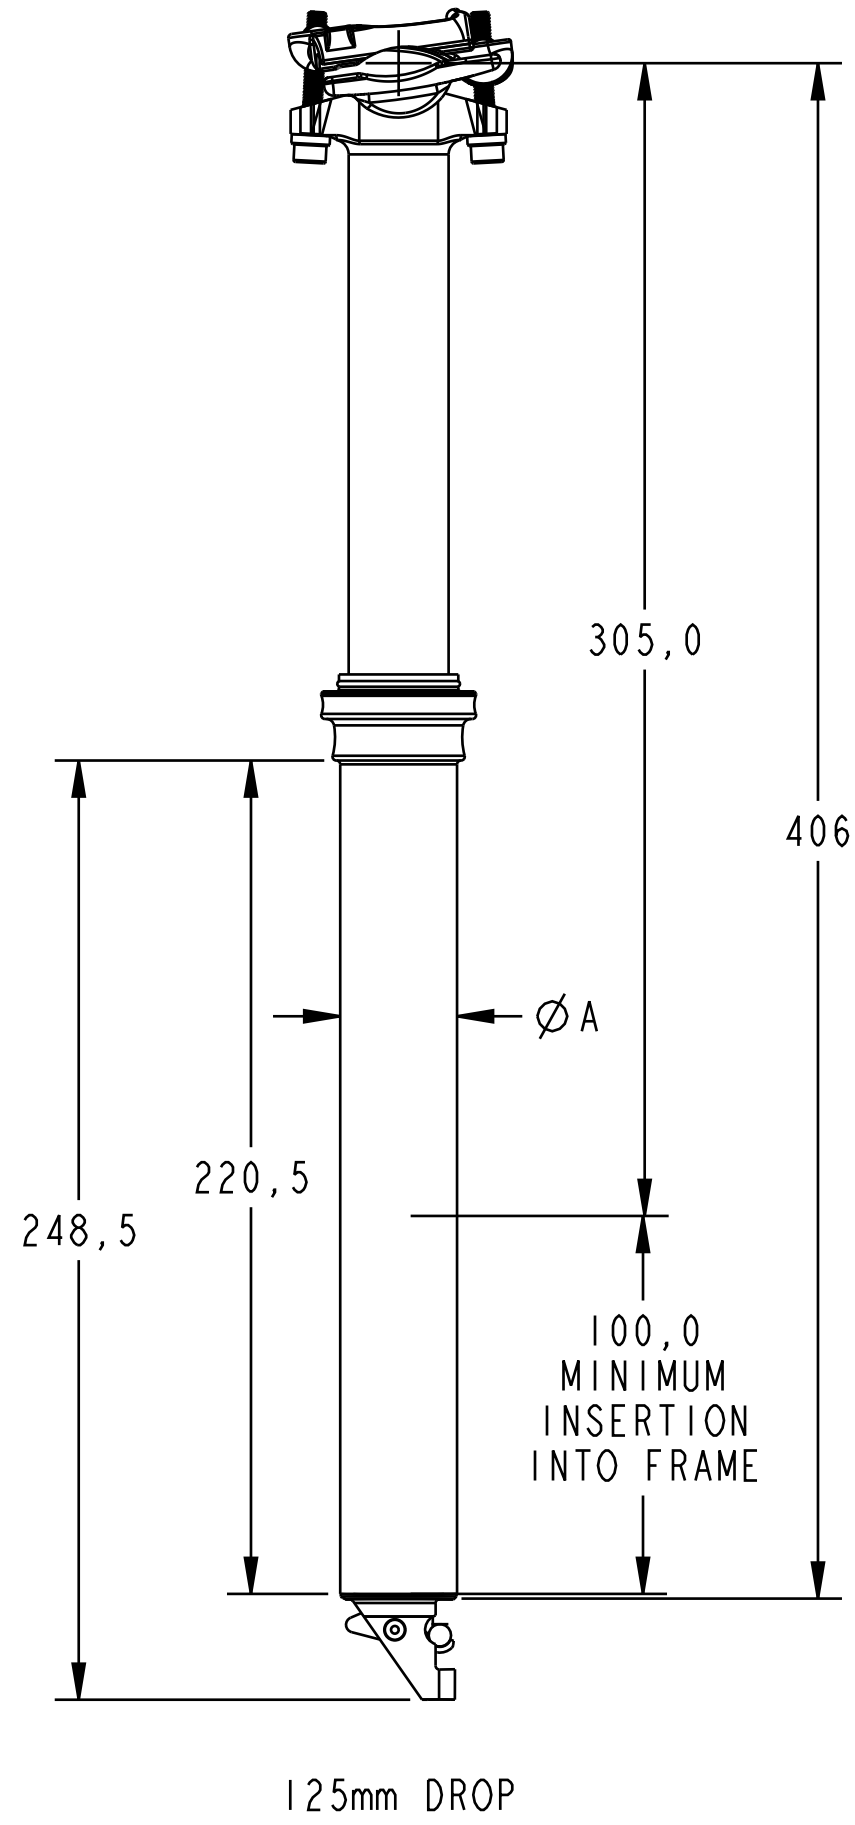
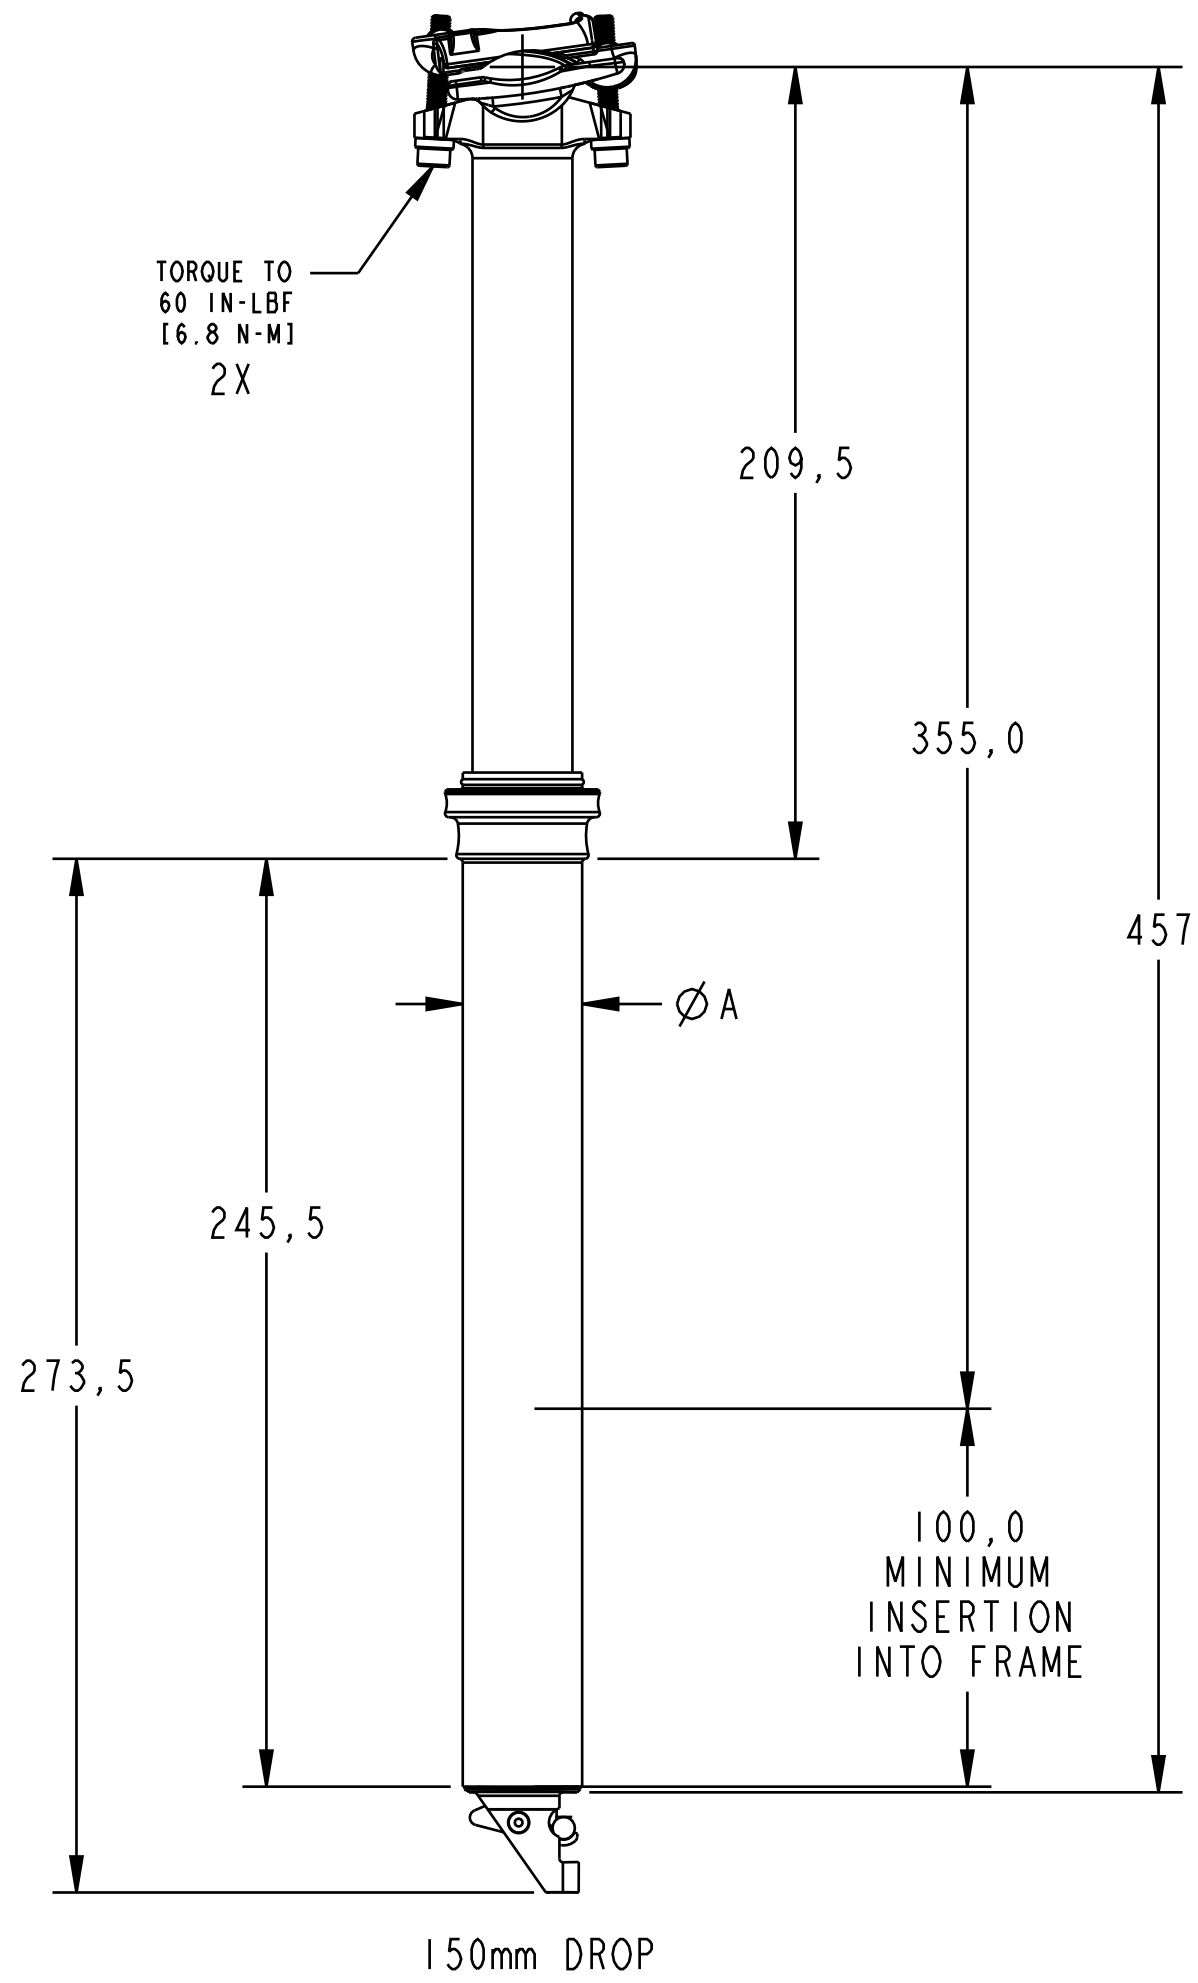


— PROPRIETARY —
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

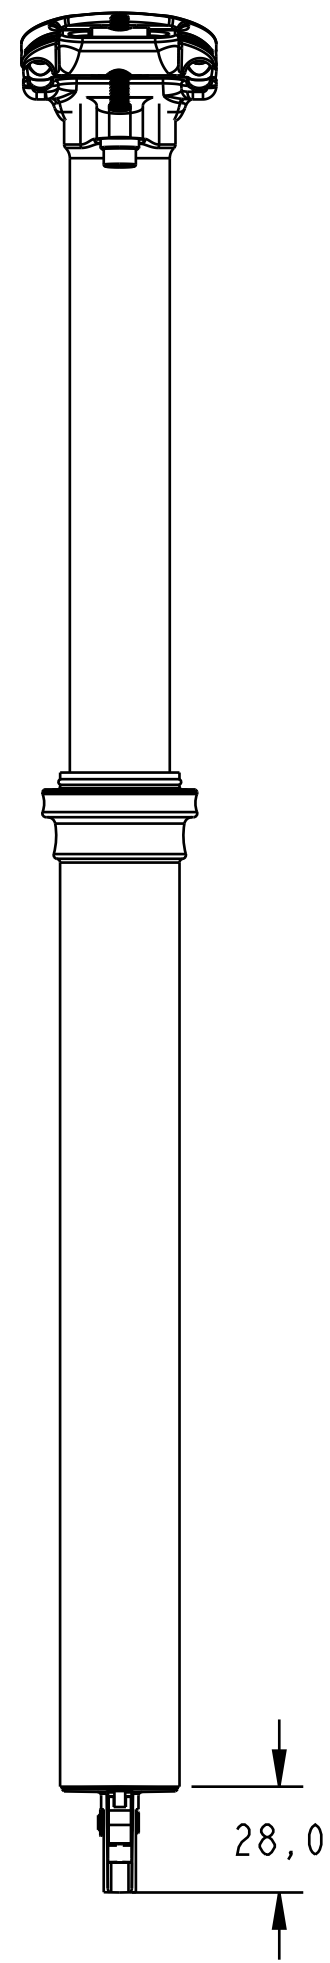

DRAWING NOT TO SCALE. FOX RESERVES THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE.
 SADDLE RAIL COMPATIBILITY: Ø7MM STEEL/TI OR 7MM X 9MM OBOURND CARBON.
 NOT COMPATIBLE WITH Ø8MM SADDLE RAILS.
 USE STANDARD 1.1 OR 1.2MM SHIFTER CABLE.
 USE STANDARD 4MM SHIFTER HOUSING WITH 6MM OD END CAPS ON EACH END.
 ON CARBON FIBER FRAMES, APPLY THIN LAYER OF CARBON ASSEMBLY PASTE TO PREVENT SEATPOST SLIPPAGE.
 THOROUGHLY REVIEW OWNER'S MANUAL PRIOR TO INSTALLATION AND USE.
 SEAT COLLAR BINDER BOLT TORQUE 45-65 IN-LBS (5.1-7.3 Nm).
 NOTE: EXCESSIVE SEAT TUBE COLLAR BINDER BOLT TIGHTNESS CAN CAUSE THE UPPER SEATPOST TO BIND
 WITHIN THE LOWER SEATPOST.

DIAMETER	30.9 OD	31.6 OD
ØA	30.9 +0.0/-0.1	31.6 +0.0/-0.1

FOX FOX Factory, Inc.
 130 Hangar Way, Watsonville, CA 95076 USA, Ph 831-768-1100, Fax 831-768-9312

**TRANSFER SEAT POST, INTERNAL ROUTING,
 USER SPECIFICATION**

SIZE	PART NO.
C	

PLOT SCALE 0.50:1 SHEET 1 OF 1