

Spring: [.690 TLG X .242 ID X 22.0 lb/in] Stainless Steel

Seals: O-Ring [3.0MM ID x 1.0MM CS] Metric, N-70, Static

820-03-321-KIT
REBOUND PISTON ASSY

204-74-023
REBOUND TUBE

029-08-004

TORQUE:
30±5 IN. LB.

IMPORTANT:
VERIFY REBOUND SHIM
IS NOT PINCHED

GREASE:
THIN LAYER
OF SLICK HONEY

210-22-244
Damp Adj Part: Needle, Rebound, High-Flow, 6 Flutes

229-10-043
REBOUND SHAFT


GREASE:
THIN LAYER OF
SLICK HONEY ON BULLET

820-03-450-KIT
Sealhead Assembly, 2015 10mm Shaft, SKF

820-03-167-KIT
Rebound Adjuster Assembly, 2011 RC2

TORQUE:
30±5 IN. LB.

LOCTITE:
ON DROP OF
RED 262

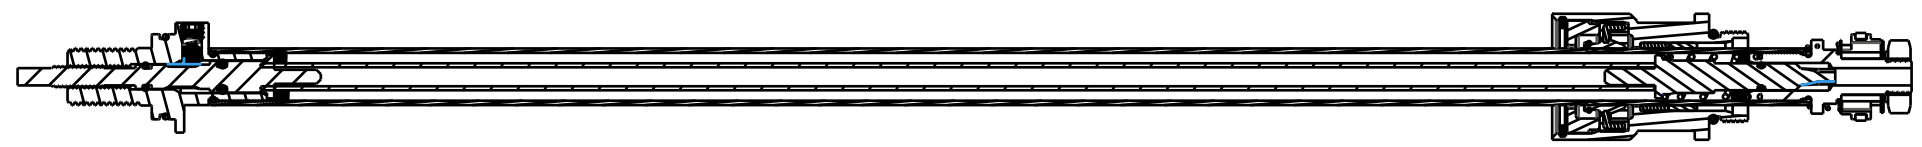

FOX FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE Assembly Drawing: 2016 36
 RC2 Rebound

SIZE DWG. NO. 820-03-473-KIT

PLOT SCALE | .00 : 1 | SHEET 1 OF 1

PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.