


4

3

2

1

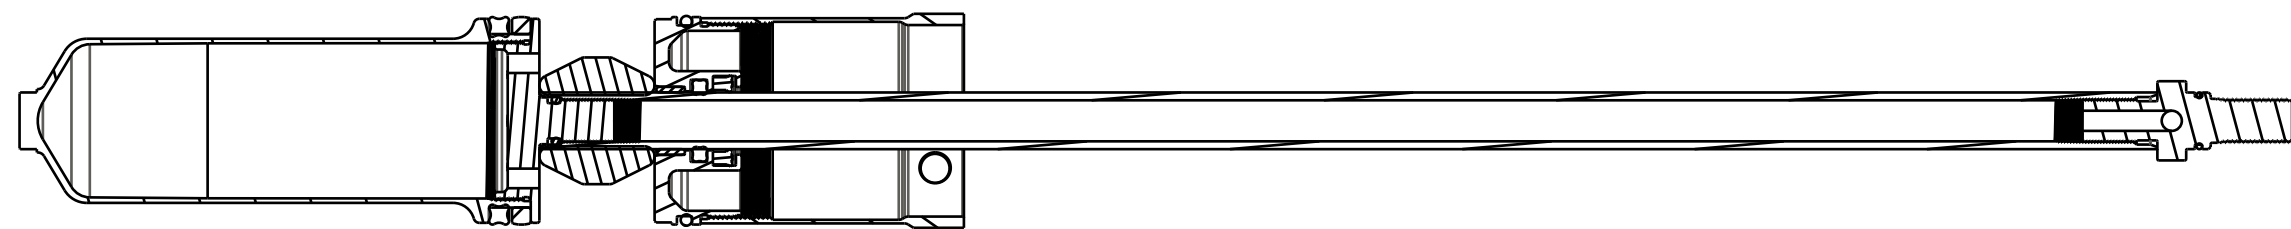

SECTION A-A

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static
 029-08-022

Base Stud: FLOAT NA 2, External Thread, Vented
 234-04-913

820-02-330-KIT
 Neg Plate Subassembly, FLOAT NA 2, 40

GREASE:
 THIN LAYER
 OF SLICK HONEY

TORQUE:
 50±5 IN.LB.

234-04-629
 Topout Bumper, FLOAT NA

LOCTITE:
 1-2 DROPS
 RED 262

229-10-409
 SHAFT, INTERNALLY THREADED

GREASE:
 THIN LAYER
 OF SLICK HONEY

LOCTITE:
 1-2 DROPS
 RED 262

029-08-060
 Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

234-04-724
 Piston Base, FLOAT NA 2, 40

002-02-060
 Piston Band, LF, FLOAT NA 2, 40

035-00-217
 SEAL: Q-RING

234-04-723
 Piston, FLOAT NA 2, 40

TORQUE:
 120±10 IN.LB.

TORQUE:
 50±5 IN.LB.

GREASE:
 THIN LAYER
 OF SLICK HONEY

GREASE:
 THIN LAYER
 OF SLICK HONEY

IMPORTANT:
 NOTE: VERIFY SEAL IS NOT
 TWISTED AFTER INSTALL

FOX **FOX Factory, Inc.**
 130 Hangar Way, Watsonville, CA 95076 USA
 Ph 831-768-1100 Fax 831-768-9312

TITLE
**Air Shaft, 40,
 FLOAT NA 2**

SIZE DWG. NO.
C **820-02-349-KIT**
 PLOT SCALE 0.75:1 SHEET 1 OF 1

PROPRIETARY
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2