

Spring: [.690 TLG X .242 ID X 22.0 lb/in] Stainless Steel

Seals: O-Ring [3.0MM ID x 1.0MM CS] Metric, N-70, Static

820-03-321-KIT
REBOUND PISTON ASSY

204-74-023
REBOUND TUBE

029-08-004

TORQUE:
30±5 IN. LB.

IMPORTANT:
VERIFY REBOUND SHIM
IS NOT PINCHED

GREASE:
THIN LAYER
OF SLICK HONEY

210-22-244
Damp Adj Part: Needle, Rebound, High-Flow, 6 Flutes

TORQUE:
30±5 IN. LB.


LOCTITE:
ON DROP OF
RED 262

229-10-046
REBOUND SHAFT

GREASE:
THIN LAYER OF
SLICK HONEY ON BULLET

820-03-450-KIT
Sealhead Assembly, 2015 10mm Shaft, SKF

820-03-167-KIT
Rebound Adjuster Assembly, 2011 RC2

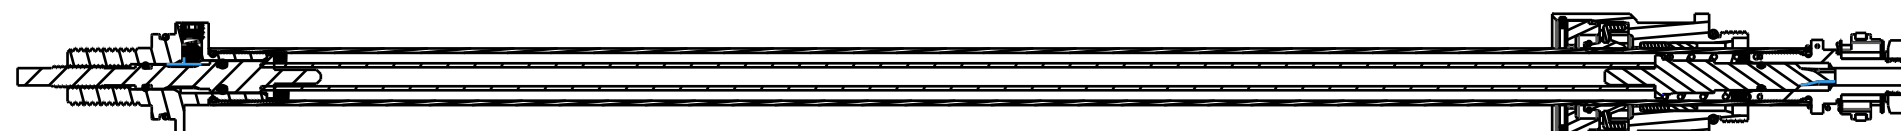

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE		2016 36 RC2 Rebound	
SIZE	DWG. NO.	820-03-473-KIT	
C			
PLOT SCALE .00 : 1		SHEET OF 1	