

REFERENCE ONLY  
(FOR INSTALLATION  
INTO FORK)

TORQUE:  
110 ± 5  
IN-LBS

210-03-120  
Knob, Rebound, 2011 36\_40

TORQUE:  
5.0 ± 1.0 IN. LB.

LOCTITE:  
BLUE 242  
ONE DROP

018-01-004-A  
Fastener, Standard: Screw [#8-32 X 0.250 TLG]

241-00-011  
Fastener, Custom: Nut, Bottom, R

241-01-011  
Fastener, Custom: Crush Washer, Plastic, 13mm

820-05-335-KIT  
2016 FIT4 Bottom Stud Interface Parts 34


CARTRIDGE ASSY

820-05-473-KIT  
2018 FIT4 TopCap Interface Parts P-S Remote, U-Cup, Push-Unlock

TORQUE:  
11 ± 3 IN-LBS


REFERENCE ONLY  
(FOR INSTALLATION  
INTO FORK)

TORQUE:  
220 ± 5 IN. LB.

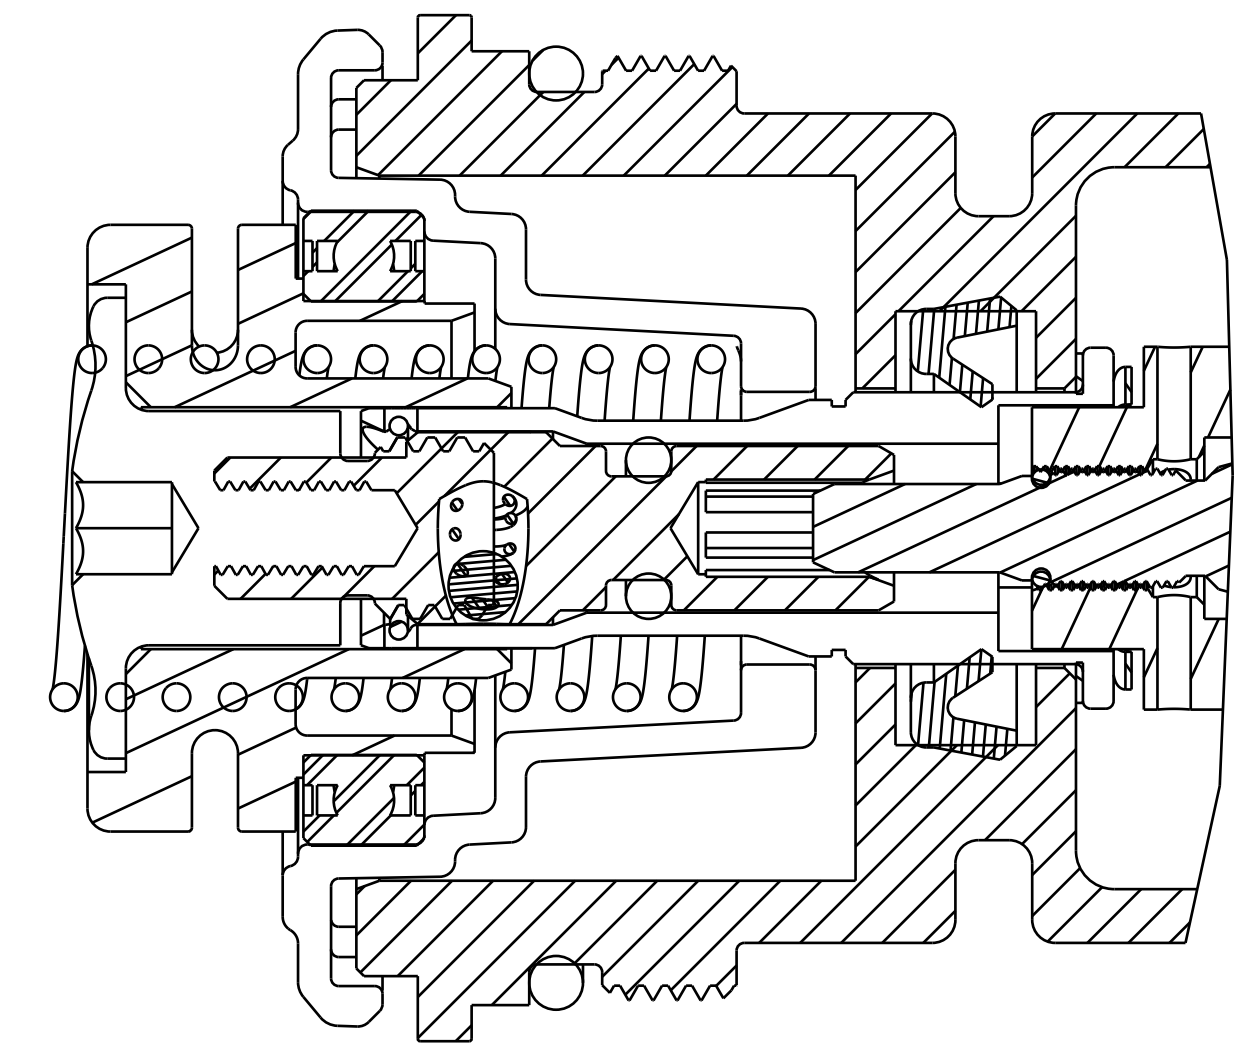

DETAIL A  
SCALE 4.000

SEE DETAIL A

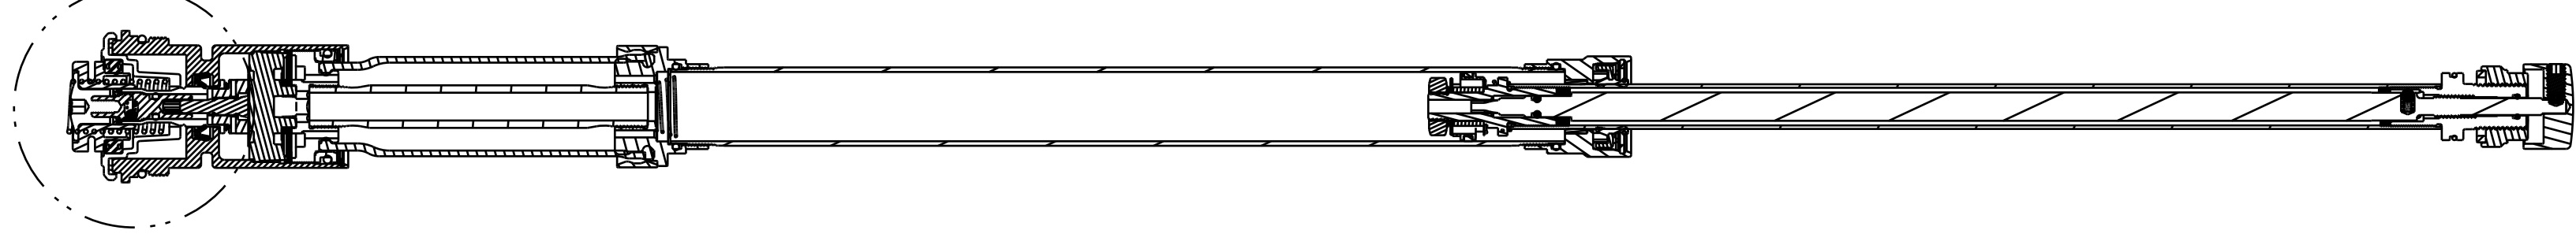

**FOX Factory, Inc.** Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2019 34 P-S FIT4 Remote  
 Cartridge Assemblies Complete**

PROPRIETARY  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOR PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

SIZE DWG. NO.  
 D | PLOT SCALE 1.00:1 | SHEET 1 OF 1