

4

3

2

1

LOCTITE:  
RED 263, 1 DROP

(241-02-106)

DETAIL **B**  
SCALE 2:1

019-02-025  
Fastener, Standard (Metric), Nut, M6 x .75

039-00-349  
Spring: [0.200 TLG X .400 ID X 0.50 lbs/in] Stainless Steel

045-00-151  
Valve: Metric [8.00mm OD X 5.55mm ID X 0.25mm THK] Custom, Check

029-08-188  
O-Ring [17mm ID X 1.5mm CS], N-90, Static

TORQUE:  
16 ± 1 IN-LB

GREASE:  
THIN LAYER  
OF SLICK HONEY

222-01-295  
Piston Damping Comp 20.0 Bore

820-03-617-KIT  
2020 Grip Remote E-Bike Compression Valving

241-02-106  
Fastener, Custom: Bolt Piston Comp Grip

GREASE:  
THIN LAYER  
OF SLICK HONEY

223-00-049  
Piston Floating: IFP, Grip

SEE DETAIL **B**

029-08-084  
Seals: O-Ring [8mm ID X 1.5mm CS] Metric, N-70, Static

210-22-957  
Damping Adj Part: Hat Preload Comp

029-08-196  
Seals: O-Ring [16.0mm ID X 2.0mm CS] Metric, N-70, Dynamic

029-03-011  
O-Ring (-011) [.070 C.S. X .301 ID]

002-02-089  
Bearing: External, [.13 W X .128 ID X .030 TH], PA6

029-08-108  
Seals: O-Ring [4.0mm ID x 1.5mm CS] Metric, N-70, Static

002-02-091  
Bearing: External, Slit [.13 W X .244 OD X .030 TH], PA6

GREASE:  
THIN LAYER  
OF SLICK HONEY

IMPORTANT:  
NOTE ORIENTATION.  
THIS END TAPERED


231-00-025  
Sleeve: Isolator, Spring, ID, Grip

019-01-116  
Fastener Standard (Metric): PIN SS 2 X 12


229-10-782  
Shaft, Damper, Comp, 8mm, 2020 Grip Remote, 36

029-08-178  
Seals: O-Ring [30.0mm X 1.5mm CS] Metric, N-70, Static

Damping Adj Part: Topcap, 36, 2020 GRIP Remote, Black Ano

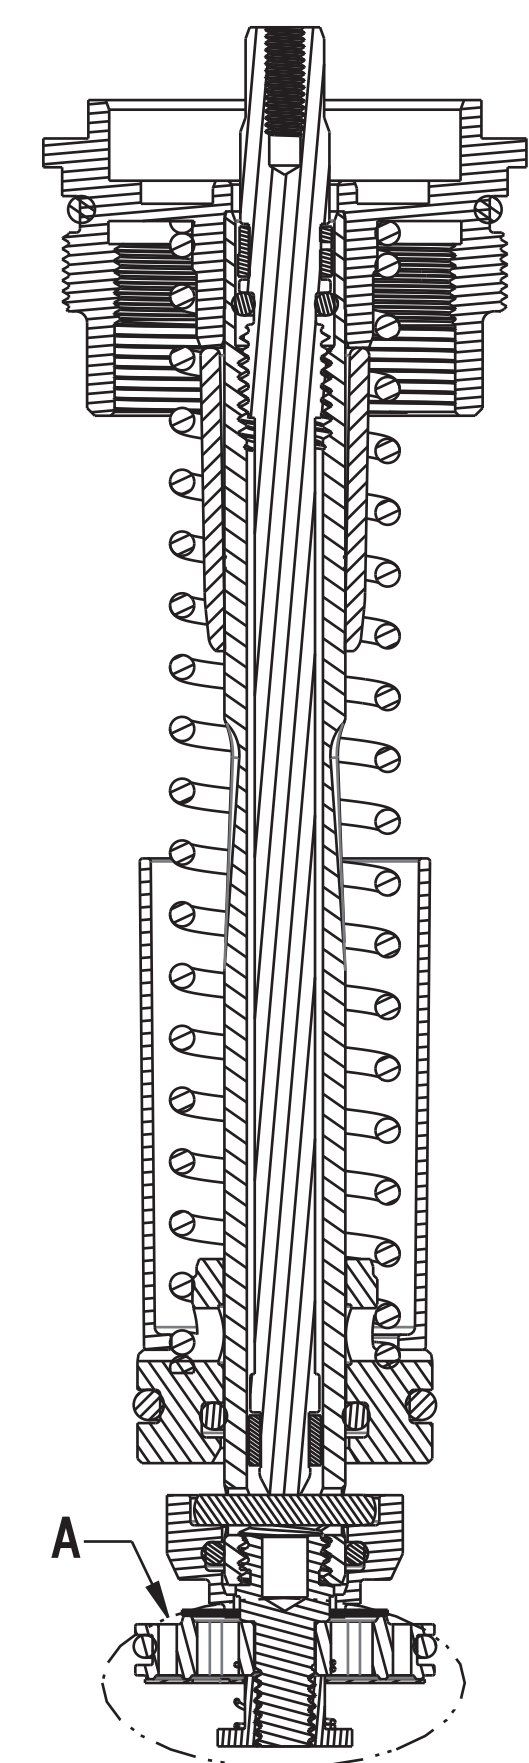

SECTION A-A  
SCALE 2:1

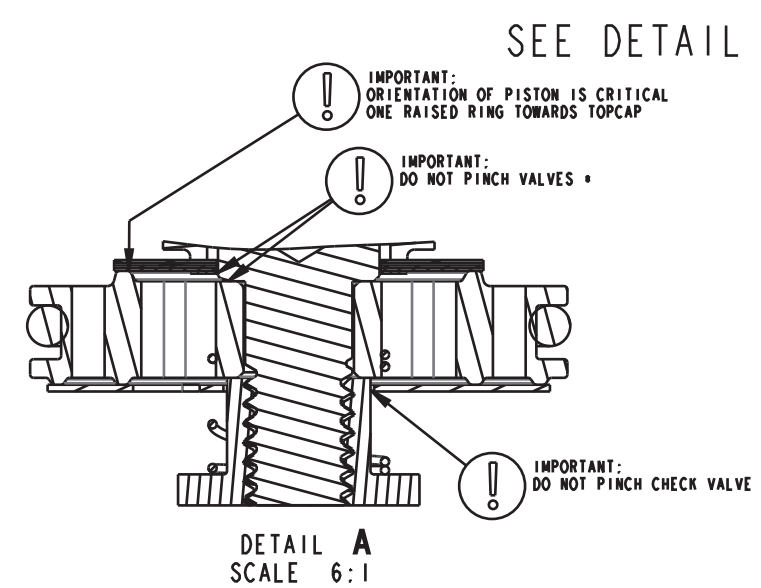

DETAIL A  
SCALE 6:1

**FOX** **FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2020 36, Grip E-Bike+ Remote, Topcap Assy**

SIZE DWG. NO. **C 820-05-609-KIT**  
PLOT SCALE 1:1 SHEET 1 OF 1

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM