


4

3

2

1

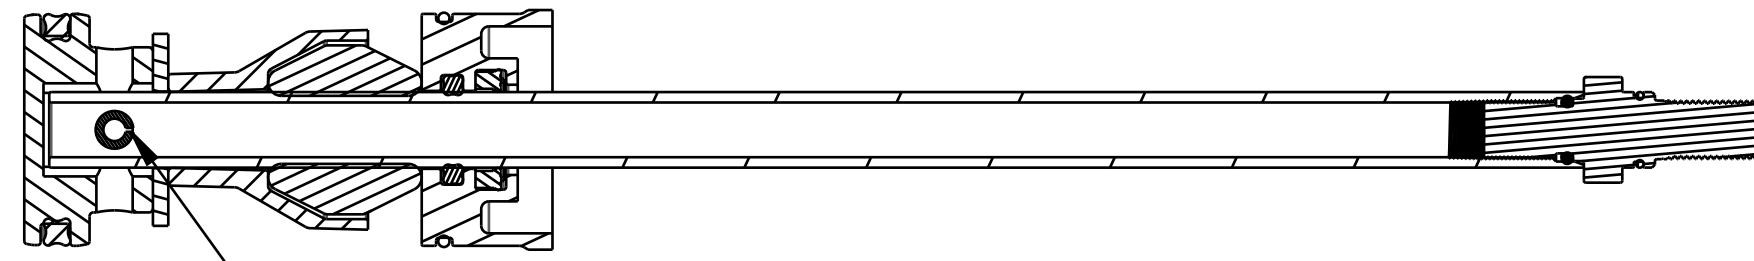

IMPORTANT:
ORIENT GAP IN PIN TOWARDS
TOPOUT SPACER ±15°

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

234-04-655
Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

234-04-629
Topout Bumper, FLOAT NA

029-08-060

TORQUE:
50±5 IN LB

GREASE:
THIN LAYER
OF SLICK HONEY

234-04-738
Topout Spacer, FLOAT NA 2, 0.040" Thick, Aluminum

035-00-212
Seals: Q-Ring [(-212) 0.139 C.S. X 0.859 ID]

PISTONS:
222-01-335: Piston, FLOAT NA 2 LC, 32, 1.110 Bore, Long Travel (only used on 820-02-417-KIT)
222-01-330: Piston, FLOAT NA 2 LC, 32, 1.110 Bore

LOCTITE:
1-2 DROPS
RED 262

234-04-739
Topout Spacer, Float, Rhythm (only found on 820-02-417-KIT)

NEG PLATE SUBASSEMBLIES:
820-02-409-KIT: Neg Plate Subassembly, 2018 FLOAT LC NA 2, 32, Short Travel, 1.110 Bore
820-02-411-KIT: Neg Plate Subassembly, 2018 FLOAT LC NA 2, 32, Long Travel, 1.110 Bore

AIR SHAFT

IMPORTANT:
PRESS PIN UNTIL CENTERED

060-01-010
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE			
2020 32 FLOAT NA2			
Air Shaft Assemblies			
SIZE DWG. NO.			
C			
PLOT SCALE 1:1:1		SHEET 1 OF 1	

4

3

2

1