


4

3

2

1

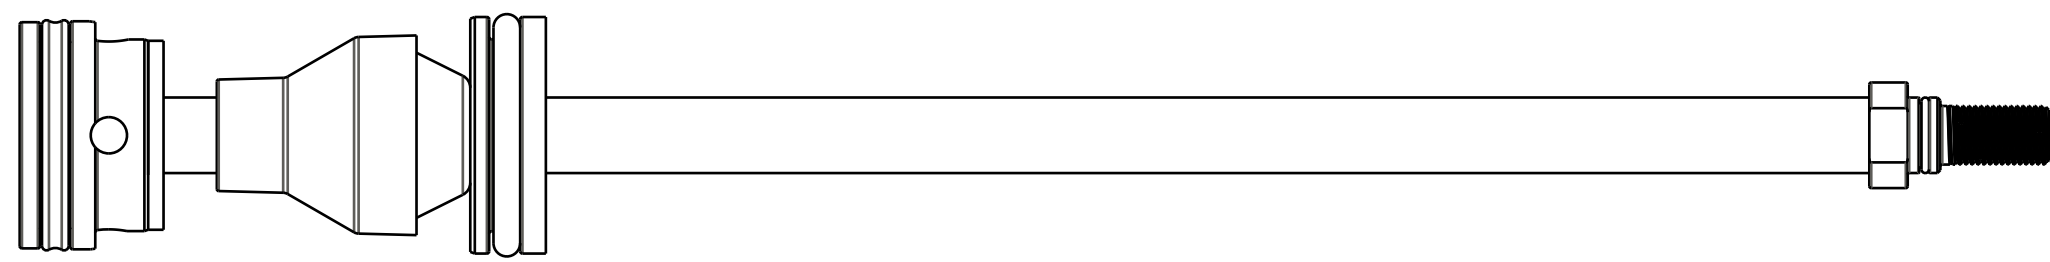

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

TORQUE:
50±5 IN.LB

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-405-KIT
Neg Plate Subassembly, FLOAT, 2018 32 Rhythm

IMPORTANT:
GROOVE FACES
PISTON

Topout Bumper, FLOAT NA

Topout Spacer, Float, Rhythm

GREASE:
THIN LAYER
OF SLICK HONEY

SHAFT

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

PISTON

SEAL: O-RING

FOX **FOX Factory, Inc.** Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312
 TITLE **2021 32 FLOAT NA2 RHYTHM**
AIR SHAFT ASSEMBLIES

SIZE DWG. NO. **C**
 PLOT SCALE | .00:1 | SHEET | OF | 1

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM