

4

3

2

1

Retaining Ring: Wire [.280 OD X .024 CS] SS

Compression Adjust Coupler, F-S, FIT4

ASSEMBLE AT THIS LEVEL

TOPCAP ASSEMBLIES:

- 820-05-602-KIT: 2020 36 FIT4 F-S Topcap Assy, CL Tune, Remote, U-Cup, 3 Position
- 820-05-600-KIT: 2020 36 FIT4 F-S Topcap Assy, CL Tune, Remote, U-Cup, 2 Position, Push-Lock
- 820-05-598-KIT: 2020 36 FIT4 F-S Topcap Assy, Remote, U-Cup, 3 Position
- 820-05-597-KIT: 2020 36 FIT4 F-S Topcap Assy, Remote, U-Cup, 2 Position, Push-Unlock
- 820-05-596-KIT: 2020 36 FIT4 F-S Topcap Assy, Remote, U-Cup, 2 Position, Push-Lock

820-03-606-KIT
2020 36 FIT4 8mm Damper Shaft Assy

TORQUE:
55±5 IN LBS

TORQUE:
55±5 IN LBS

820-03-609-KIT
2020 36 FIT4 8mm, Bladder Assy


Seals: O-Ring [3.0MM ID x 1.5MM CS] Metric, N-70, Static

Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

Ball [Ø.1094]

GREASE:
THIN LAYER OF
SLICK HONEY ON BALL

ASSEMBLE THESE PARTS AFTER OIL FILL

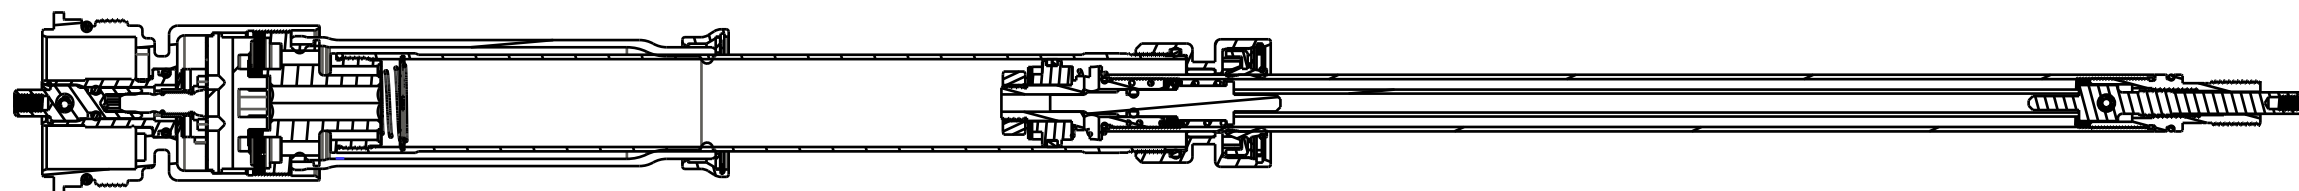

SECTION A-A
SCALE 0.750

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**2021 36 FIT4 F-S REMOTE
CARTRIDGE ASSEMBLIES**

SIZE DWG. NO.
C
PLOT SCALE 1.0:1 SHEET 1 OF 1