


4

3

2

1

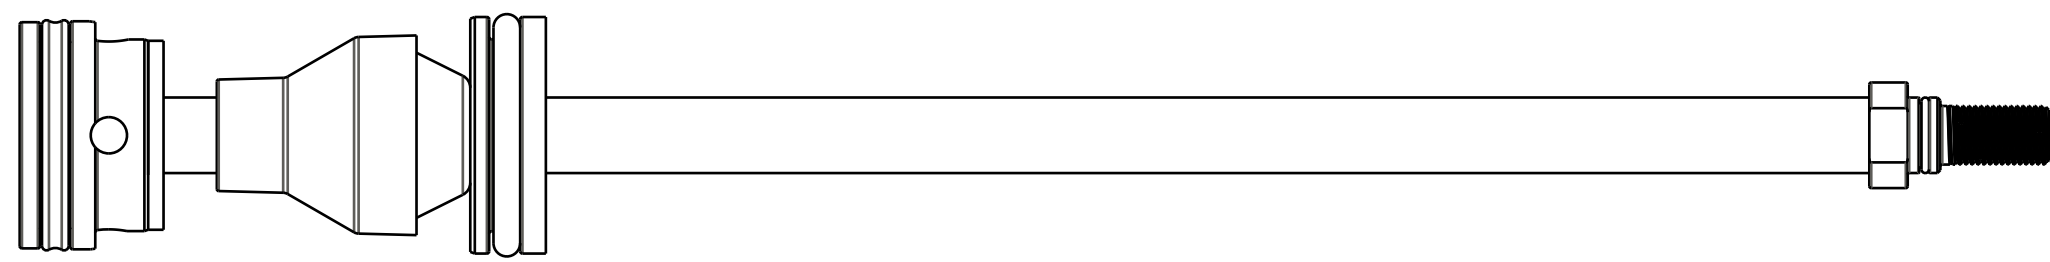

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

TORQUE:  
50±5 IN.LB.

LOCTITE:  
RED 263, 2-3 DROPS  
OR ON FEMALE THREAD

GREASE:  
THIN LAYER  
OF SLICK HONEY

820-02-544-KIT  
Neg Plate Subassembly, 2019, 36 Rhythm,  
1.275 Bore, No Spacer

IMPORTANT:  
GROOVE FACES  
PISTON

Topout Bumper, FLOAT NA

Topout Spacer, Float, Rhythm

GREASE:  
THIN LAYER  
OF SLICK HONEY

SHAFT

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:  
PRESS PIN  
UNTIL CENTERED

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

PISTON, FLOAT

SEAL: O-RING

IMPORTANT:  
VERIFY SEAL IS NOT  
TWISTED AFTER INSTALL

		<b>FOX Factory, Inc.</b> 130 Hangar Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312
<b>TITLE</b> 2021 36 RHYTHM FLOAT NA2 AIR SHAFT ASSEMBLIES		
<b>SIZE</b> C	<b>DWG. NO.</b> 	<b>SHEET</b> 1 OF 1
<b>PLOT SCALE</b>   .00 : 1		<b>Pr o E ASSEM</b>

- PROPRIETARY -  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

Pr o E ASSEM