
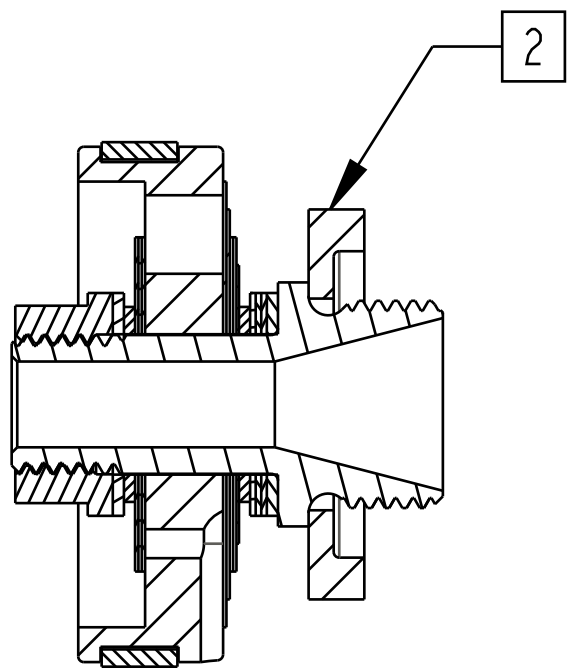
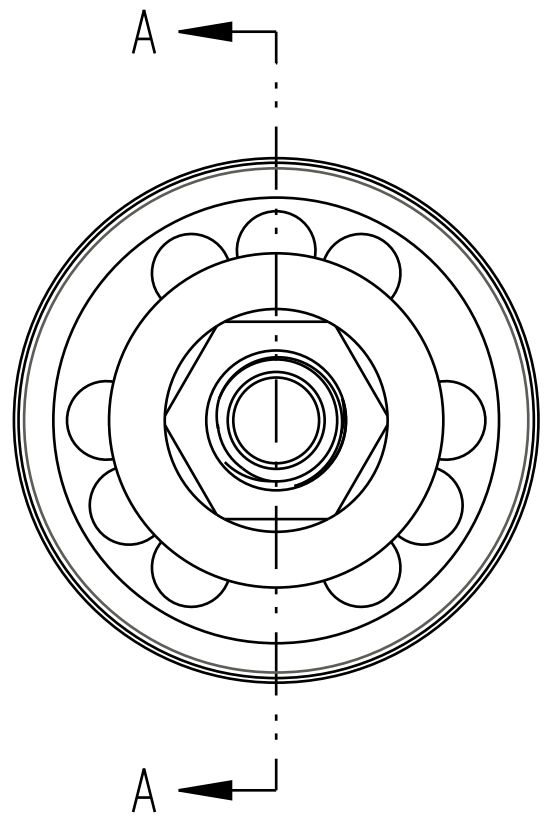


4

3

2

1

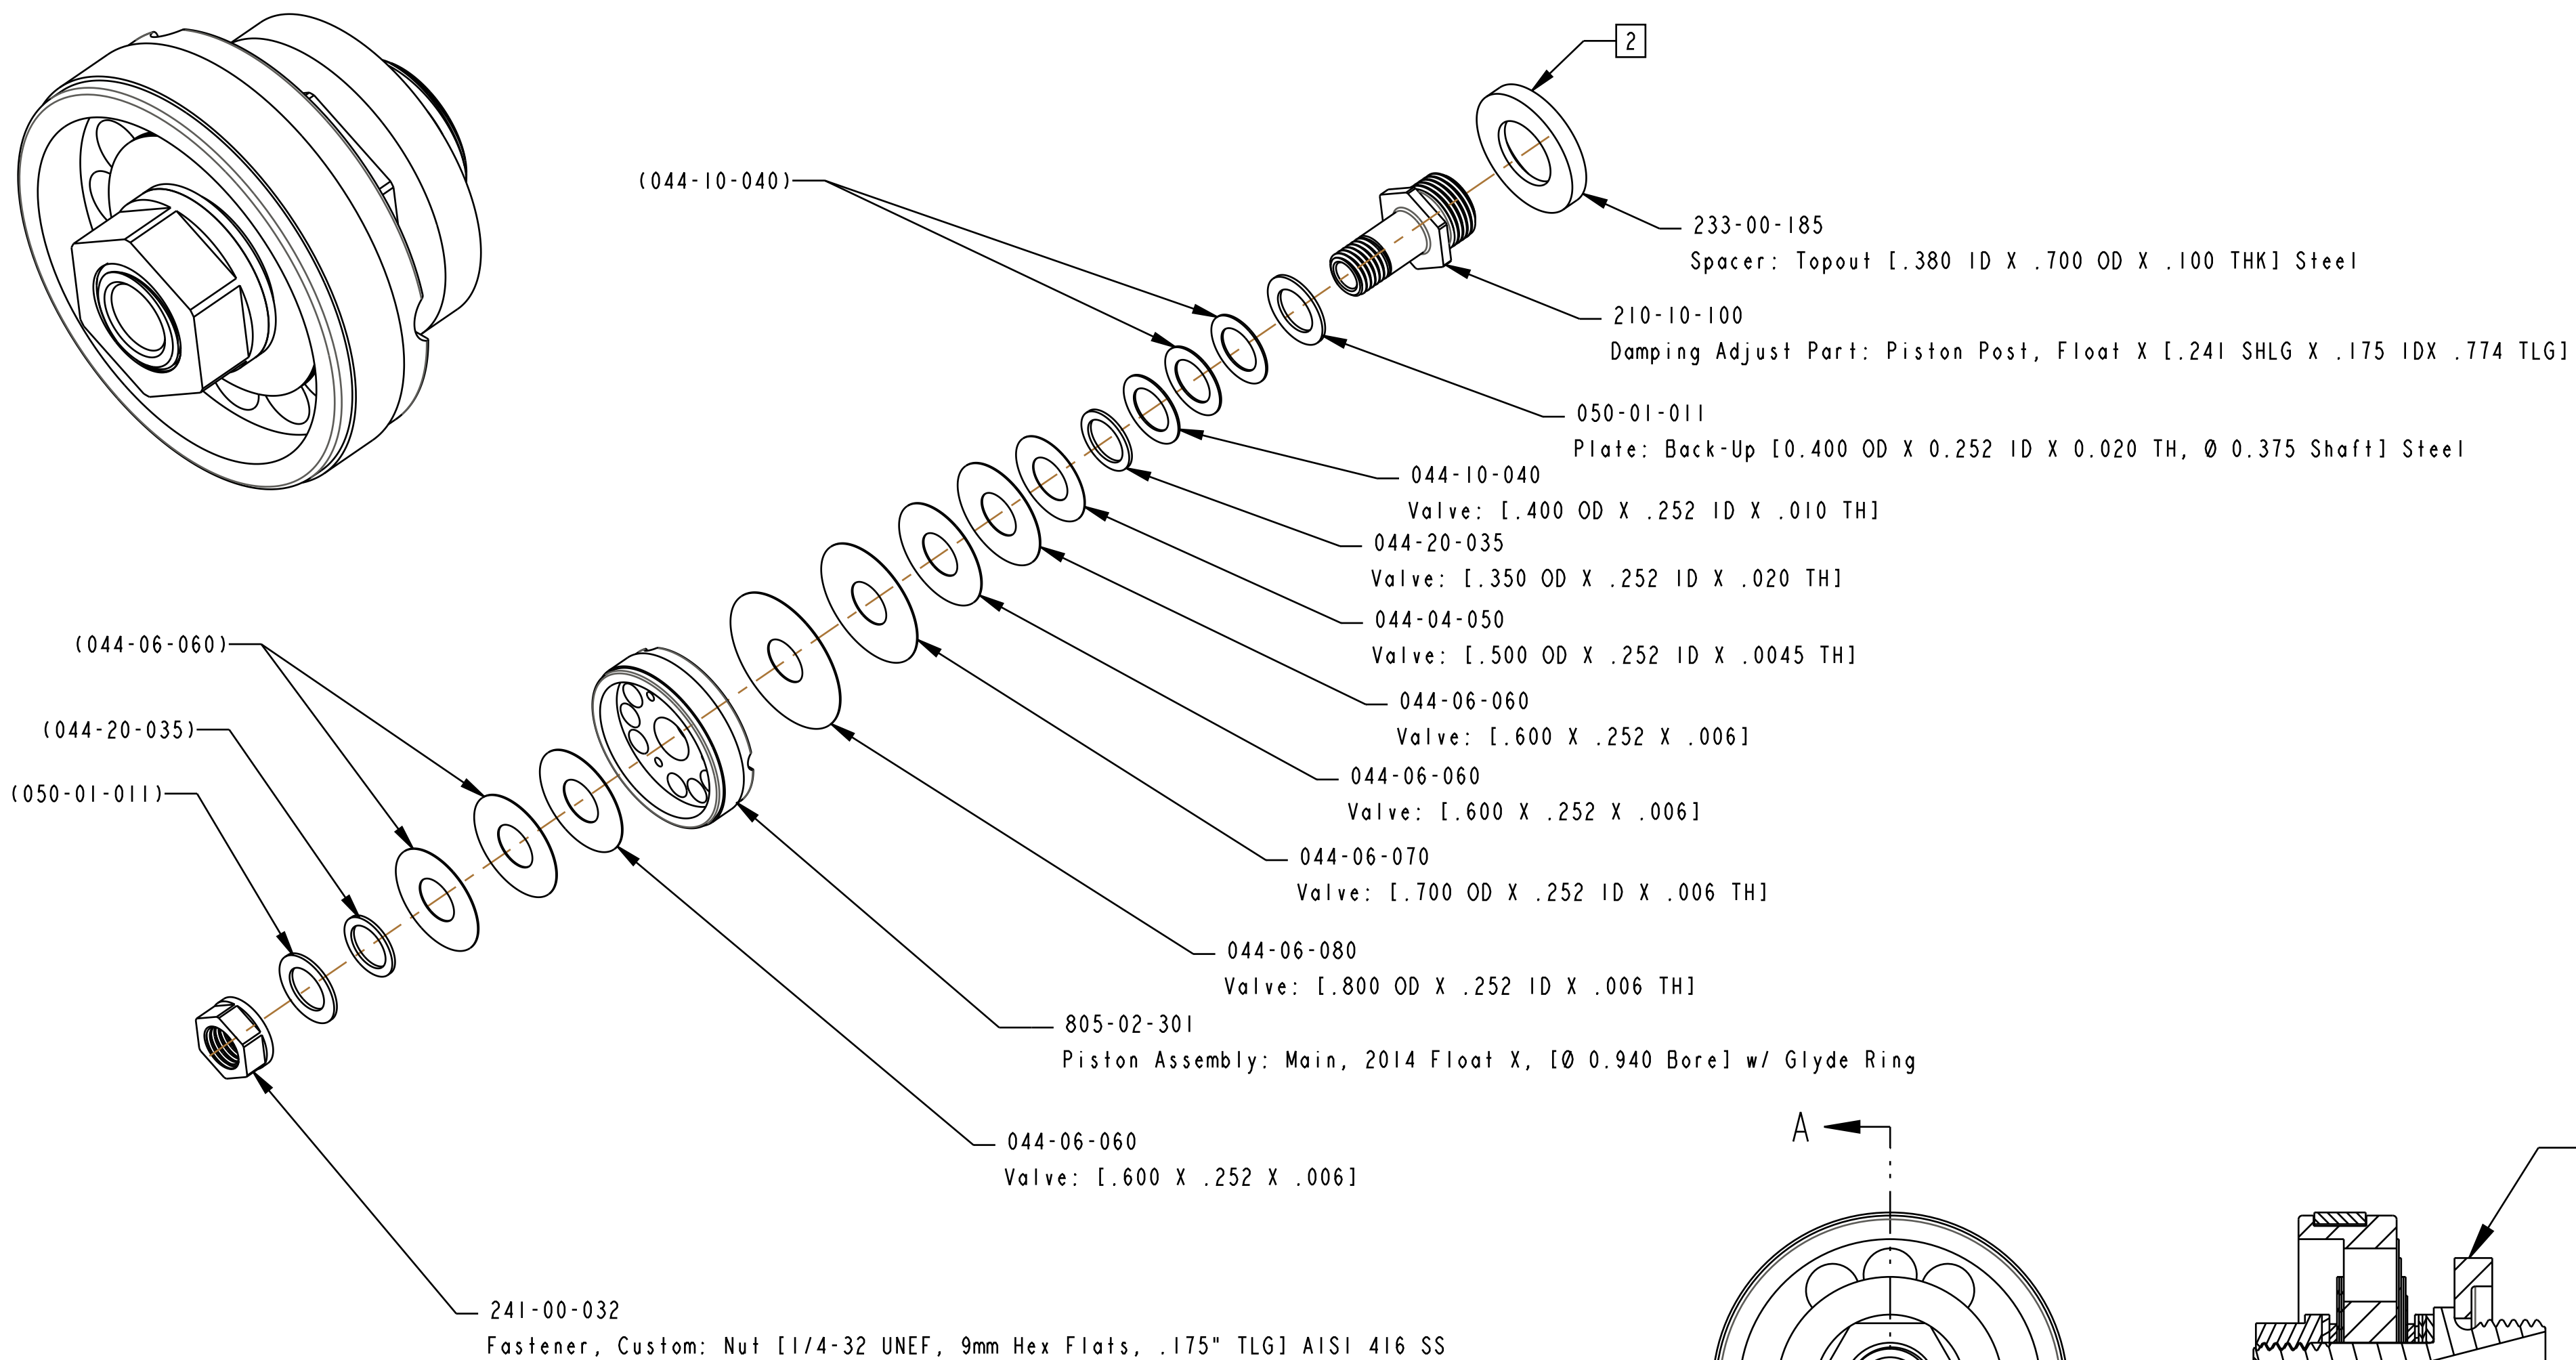

SECTION A-A

NOTES: UNLESS OTHERWISE SPECIFIED

1. AFTER INSTALLING VALVE ASSEMBLY, SHOCK SHOULD HAVE 18-23 REBOUND POSITIONS.

2 PART ORIENTATION IS CRITICAL TO FUNCTION.

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE			
Valving Assy: 2014			
Float X CTD, ECFXCF, RTM			
SIZE	DWG. NO.		
C	807-72-200-KIT		
PLOT SCALE 1.5:1		SHEET 1 OF 1	

4

3

2

1

ProE ASSEM