

4

3

2

1

D

D

C


C

B

B

A

A

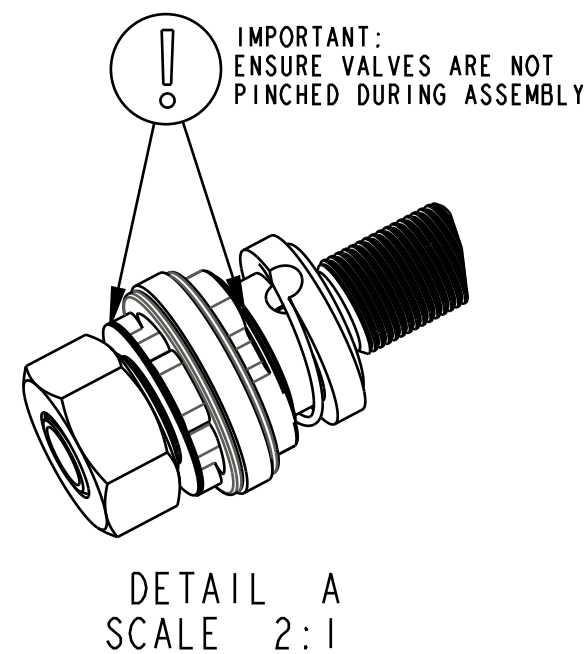

820-03-569-KIT
Sealhead Assy, 2019 FIT [8mm, M17.56] Trelleborg, O-Ring

REBOUND TUBE

LOCTITE:
RED 263, 1 DROP

TORQUE:
30±5 IN LBS

820-03-685-KIT
2022 32 TC FIT4 Rebound Adjuster Assy, 8mm Shaft

GREASE:
THIN LAYER SLICK
HONEY ON BULLET TOOL

DAMPER SHAFT

SEE DETAIL A

GREASE:
THIN LAYER
SLICK HONEY

Needle, Rebound, 2019 FIT4, 8mm

Spring: [0.688 TLG X 0.150 ID X 22.0 lbs/in] Stainless Steel

Seals: O-Ring [2.0 MM ID x 1.5 MM CS] Metric, N-60, Static

TORQUE:
30±5 IN LBS

820-03-563-KIT
2019 SC FIT4 Rebound Piston Assy, 8mm Shaft



- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	2022 32 TC 50mm Max FIT4 Damper Shaft Assy, 8mm Shaft		
SIZE	DWG. NO.	820-03-684-KIT	
C			
PLOT SCALE	.00:1	SHEET 1 OF 1	

4

3

2

ProE ASSEM