


4


3

2

1

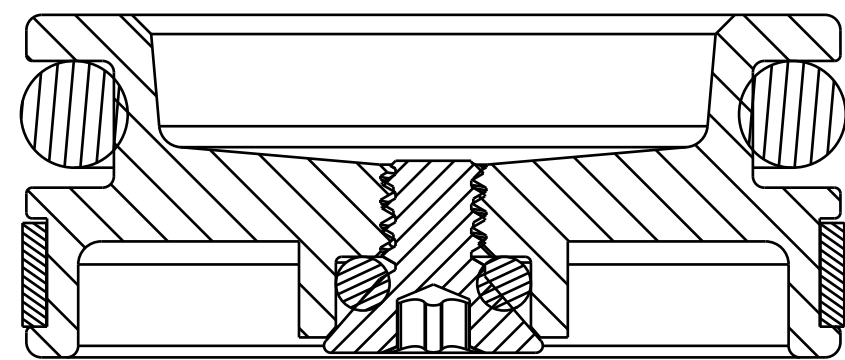

SECTION A-A



IMPORTANT:
GLIDE BAND MUST SLIDE FREELY
IN RESERVOIR



GREASE:
THIN LAYER
OF SLICK HONEY


O-Ring (-211) [1.139 C.S. X .796 ID]

Piston, Floating, IFP, 2022 FLOAT X & DHX



GREASE:
THIN LAYER
OF SLICK HONEY

Bearing: External [0.135 W X 1.070 OD X 0.031 TH, Ø 1.070 Bore] PTFE, Ring



O-Ring (-006) [1.070 C.S. X .114 ID]



TORQUE:
7±1 IN.LB.

Screw [#6-32 X 0.250 TLG], Black Oxide, Torx



FOX Factory, Inc.
130 Hangar Way, Watsonville, CA 95076 USA
Ph 831-768-1100 Fax 831-768-9312

TITLE
Piston Assembly: 2022 FLOAT X & DHX,
IFP, Floating w/ Bleed & Glide Band [1.070]

SIZE DWG. NO. **805-00-130-KIT**

PLOT SCALE 4:1 SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM