


# AIR PISTON BEARING ORIENTATION: DEFAULT

SEE PAGE 2 FOR FLIPPED ORIENTATION

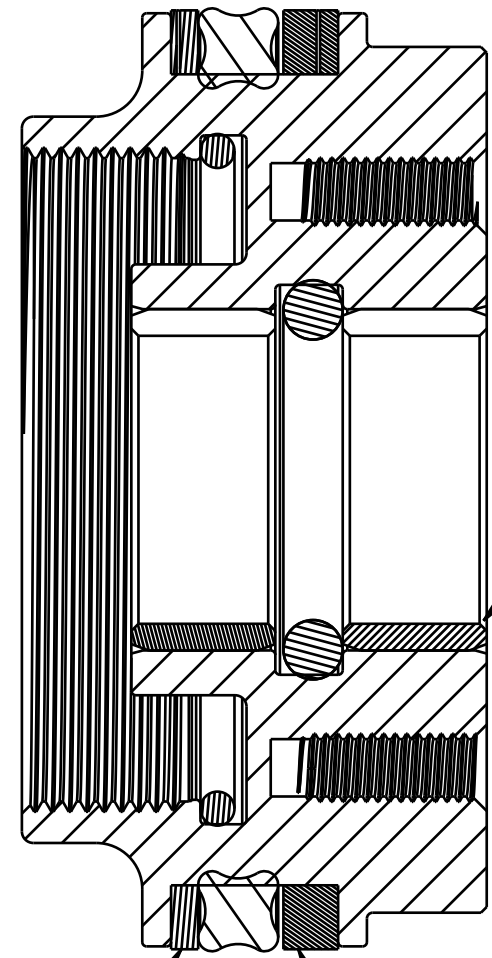

IMPORTANT:  
 SIZE BUSHING AND 100% CHECK  
 WITH GO AND NO-GO PIN GAGES:  
 GO PIN GAGE:  $\varnothing .500$   
 NO GO PIN GAGE:  $\varnothing .501$

Bearing: (T) External [1.111 W X 1.630 OD X .047 TH,  $\varnothing 1.640$  Bore] TFM, Split

Bearing: (T) External [1.111 W X 1.630 OD X .095 TH,  $\varnothing 1.640$  Bore] TFM, Split

Bearing: (T) External [1.111 W X 1.630 OD X .047 TH,  $\varnothing 1.640$  Bore] TFM, Split


GREASE:  
 THIN LAYER  
 OF SLICK HONEY

GREASE:  
 THIN LAYER  
 OF SLICK HONEY

IMPORTANT:  
 THICK BUSHING TOWARDS  
 BEARING CAP SIDE

IMPORTANT:  
 THIN BUSHING TOWARDS  
 DAMPER BODY SIDE

SECTION A-A  
 SCALE 3:1

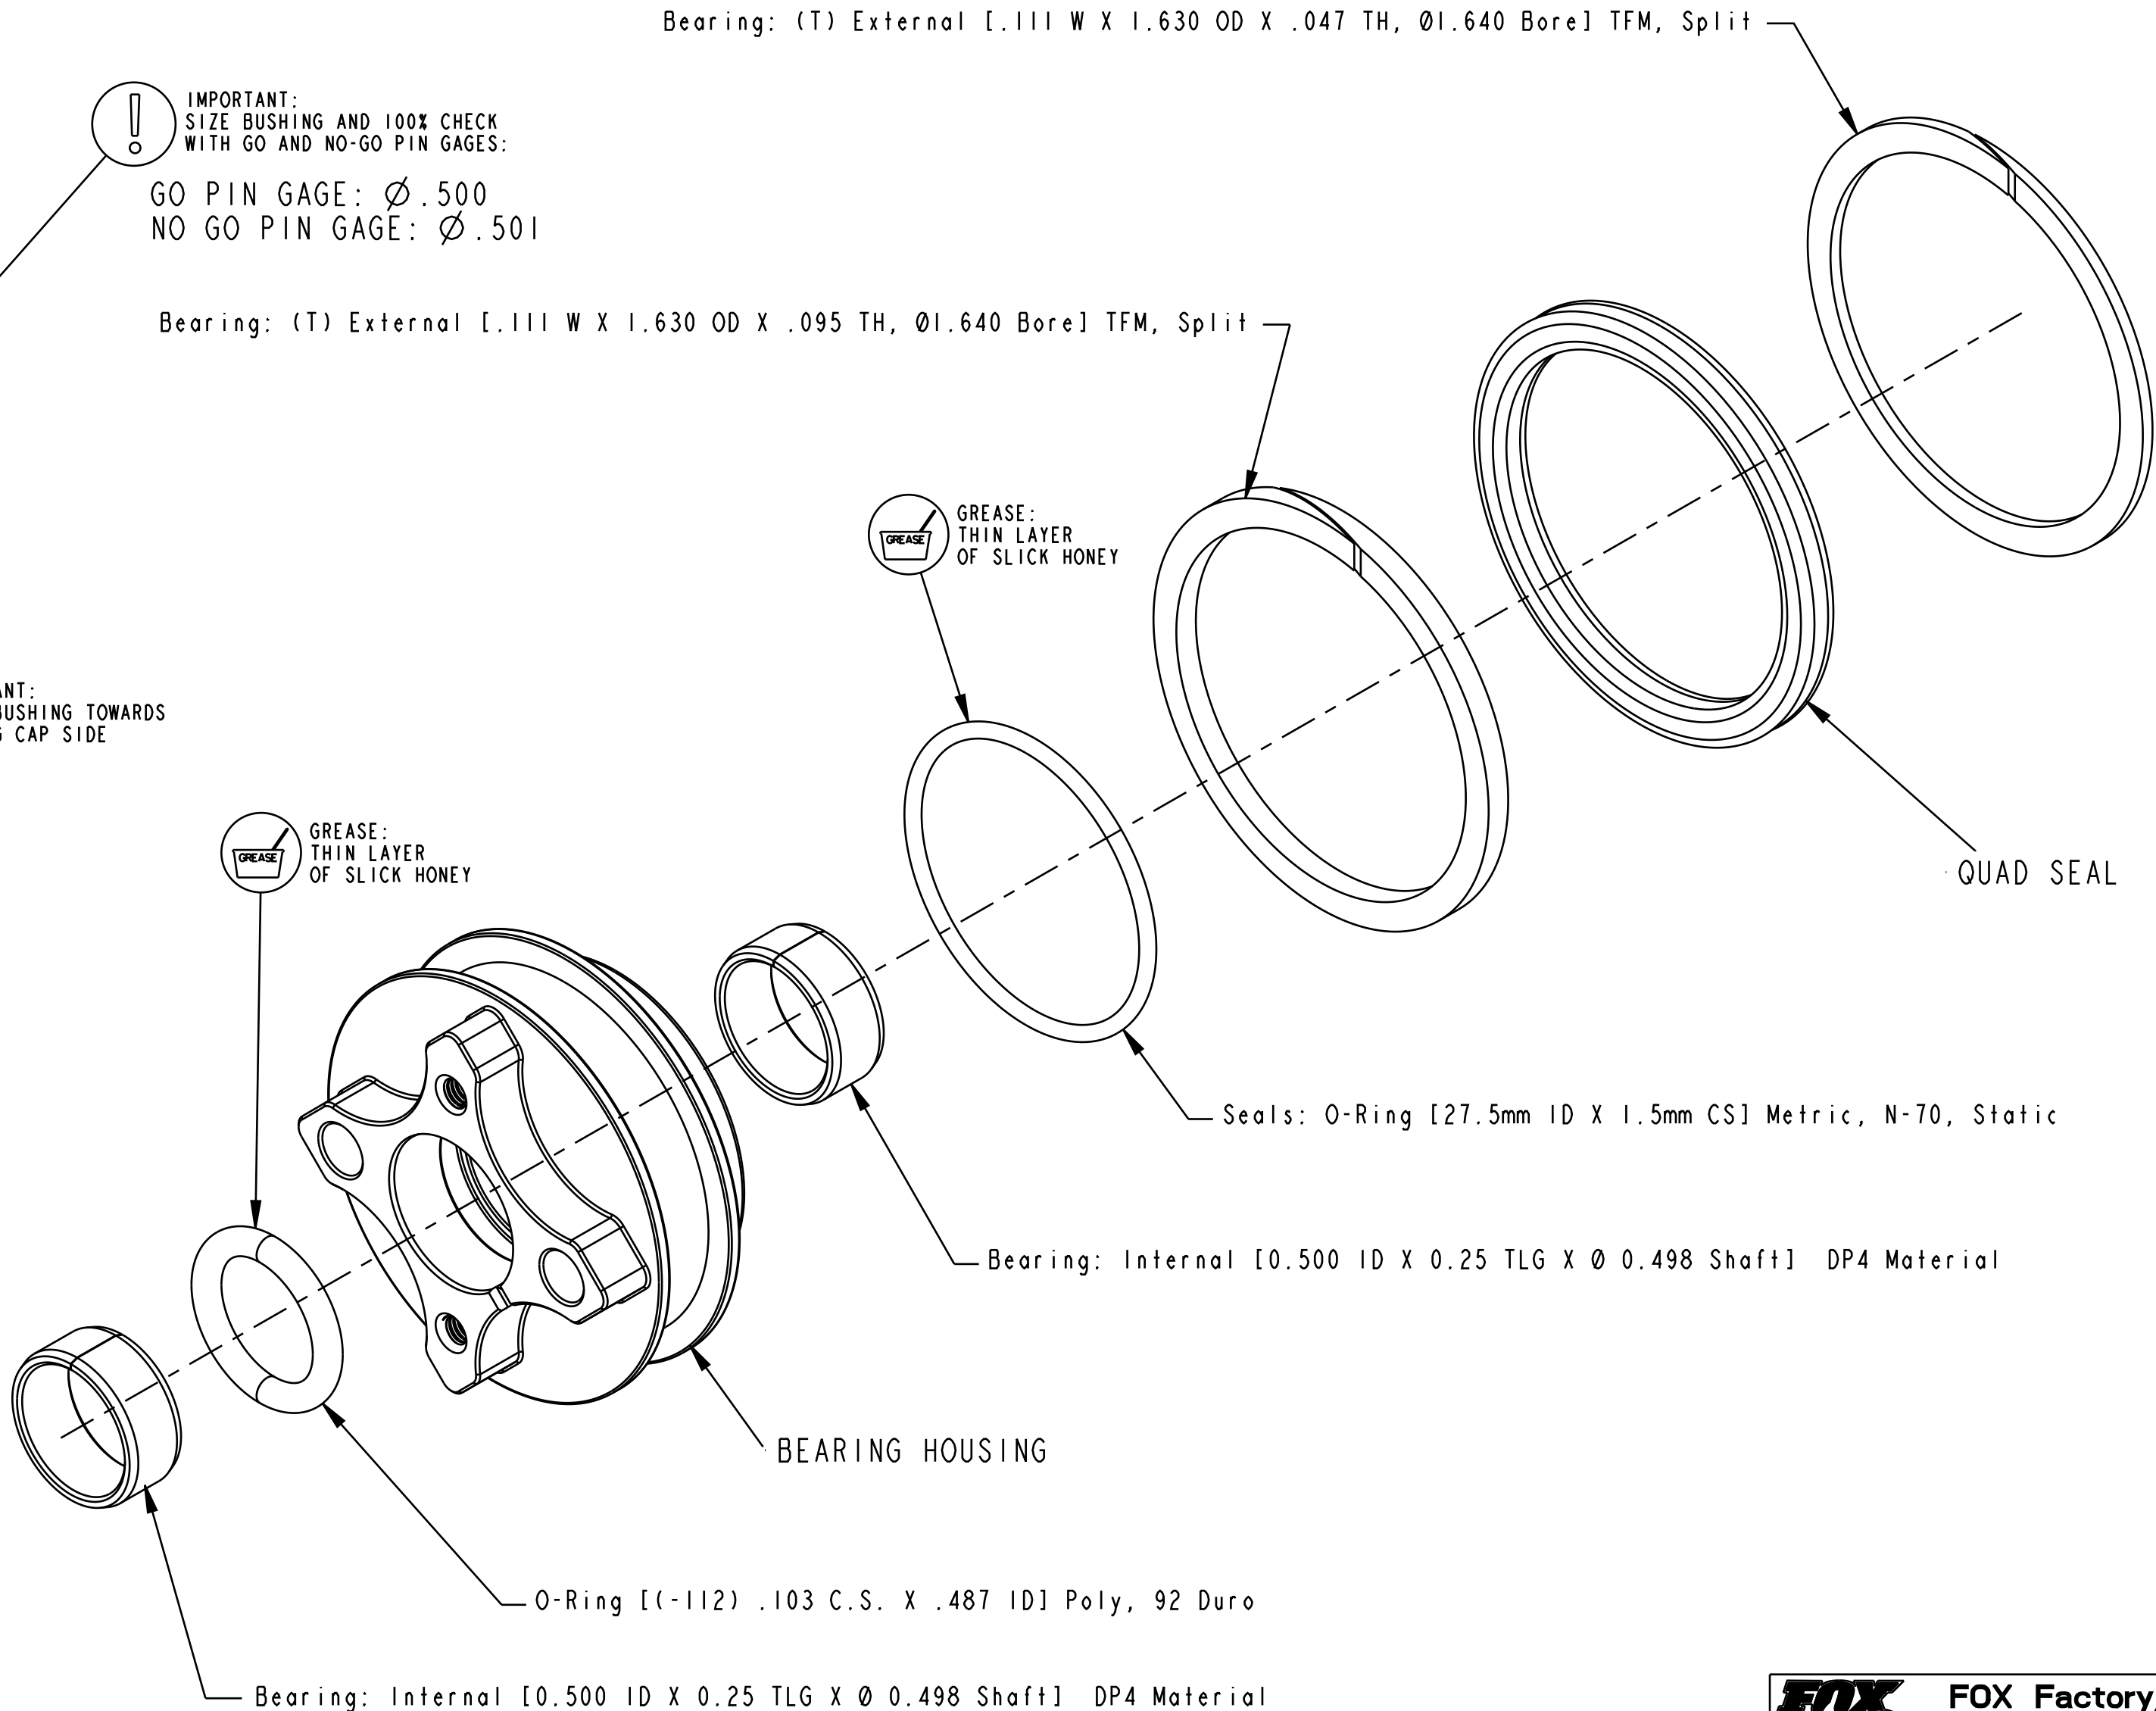

**FOX** FOX Factory, Inc. Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2022 FLOAT X Bearing Assys**

SIZE DWG. NO.  
**C**

PLOT SCALE 2:1 SHEET 1 OF 2

- PROPRIETARY -  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.