


4

3

2


1

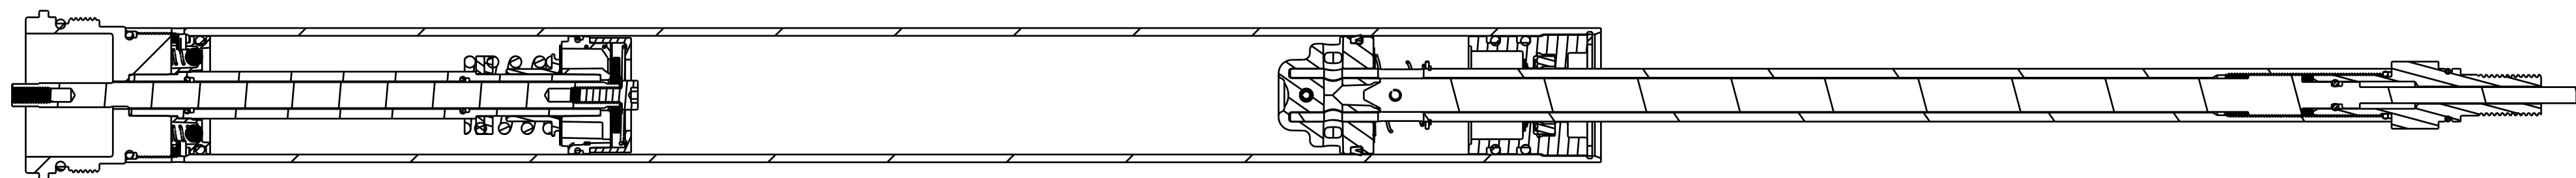

Retaining Ring: Internal [1.915 OD X .037 TH] Square Wire, Single Turn, Smalley


038-00-115

Damper Shaft Assy, O/C

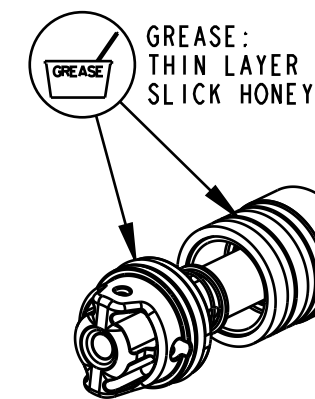


GREASE:
THIN LAYER
SLICK HONEY

NOTE: BEFORE OIL FILL, SET REBOUND ADJUSTER FULLY COUNTER CLOCKWISE (OPEN) TO AID IN BLEEDING AND FILLING.

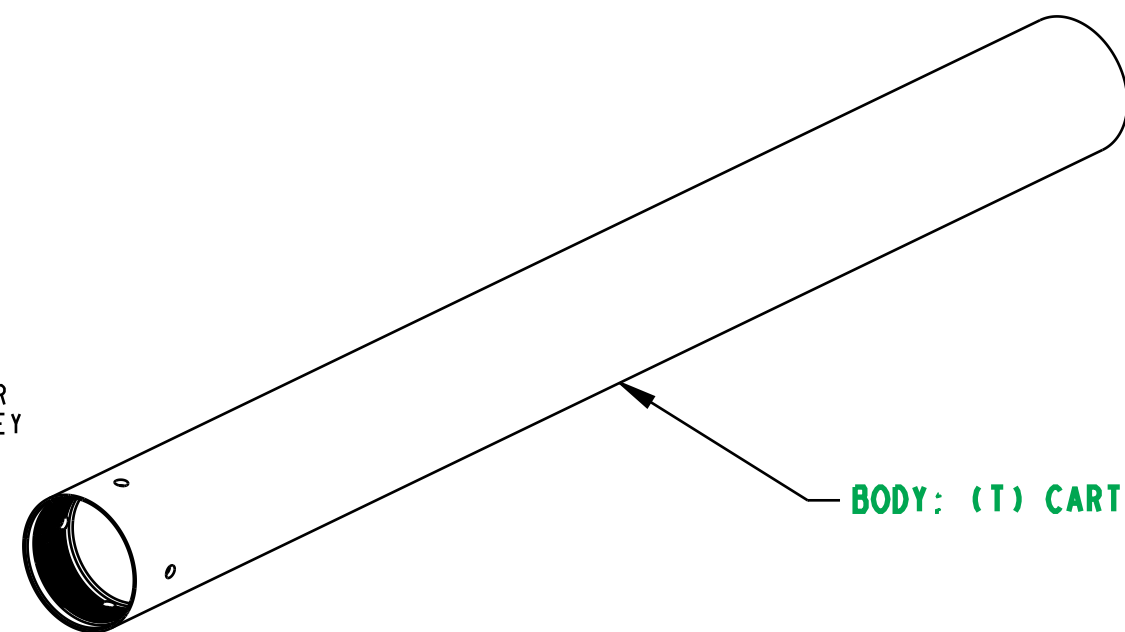

BODY: (T) CARTRIDGE, MACHINED, 2013 O/C-CTD

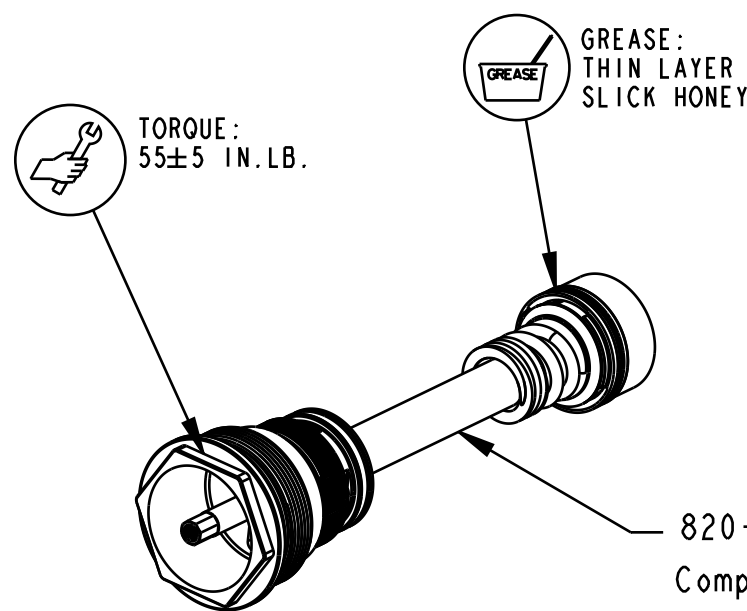

TORQUE:
55±5 IN.-LB.

GREASE:
THIN LAYER
SLICK HONEY

820-03-425-KIT
Compression Assy, 2014 32mm, O/C-CTD

1. INSTALL Damper Shaft Assy IN 207-77-422. SECURE IN PLACE WITH 038-00-115.
2. WITH REBOUND SHAFT FULLY EXTENDED, FILL DAMPER WITH 67±2cc OF RED OIL
3. INSTALL Compression Assy IN 207-77-422. TORQUE TO 55±5 IN.-LB.

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
2014 32 O/C CARTRIDGE ASSY

SIZE DWG. NO.

C

PLOT SCALE 0.75:1

SHEET 1 OF 1

4

3

2

1

ProE ASSEM