


4

3

2

1

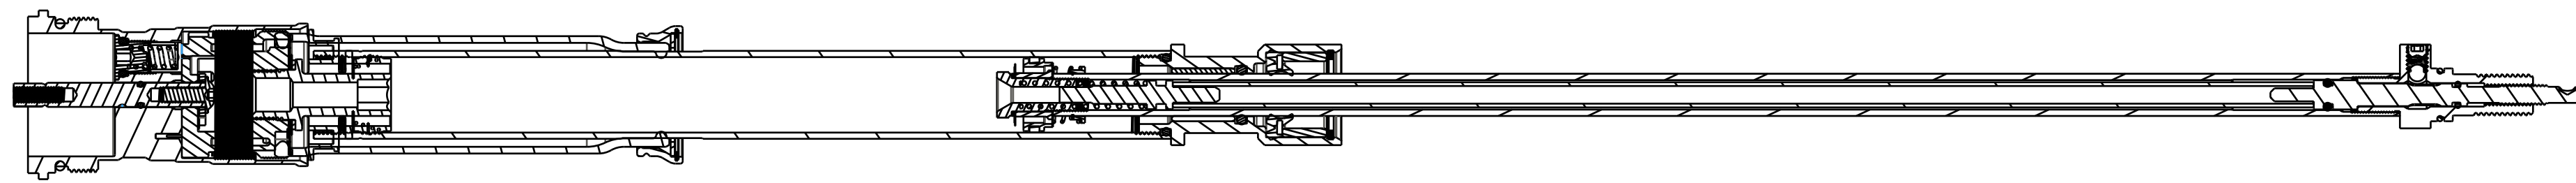

210-22-596  
BLEED SCREW, 2013 FIT-CTD and CTD-ADJ

029-08-034  
Seals: O-Ring [4.5MM ID x 1.5MM CS] Metric, N-70, Static

BLOWOFF SPRING 039-00-304

210-22-796  
Blowoff Piston, 2014 FIT CTD

**TOPCAP ASSY 820-05-309-KIT**

ASSEMBLE 002-02-025 AT THIS LEVEL

**DAMPER SHAFT ASSY**

**BLADDER AND CARTRIDGE BODY ASSY**

TORQUE:  
20±3 IN.LB.

GREASE:  
THIN LAYER  
OF SLICK HONEY

GREASE:  
FILL INTERNAL POCKET  
WITH SLICK HONEY

TORQUE:  
75±5 IN.LB.

TORQUE:  
75±5 IN.LB.

		<b>FOX Factory, Inc.</b>	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE			
<b>2015 32 FIT CTD Cartridge Assy</b>			
SIZE DWG. NO.			
<b>C</b>			
PLOT SCALE		1:1	SHEET 1 OF 1

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM