

4

3

2

1

241-00-005
Fastener, Custom: Nut, Bottom, R_RL_RLC

241-01-002
Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

TORQUE:
50±5 IN.LB.
(INTO FORK CHASSIS)

IMPORTANT:
INSPECT 100% THAT RETAINING RING
IS FULLY INSTALLED INTO GROOVE FULL 360°

038-00-141
RETAINING RING

029-03-008
O-Ring (-008) [.070 C.S. X .176 ID]

GREASE:
THIN LAYER
OF SLICK HONEY



820-05-345-KIT
TOPCAP ASSY

TORQUE:
220±5 IN.LB.
(INTO FORK CHASSIS)

234-04-950
VOLUME SPACER

234-04-881
AIR CAP

AIR SHAFT ASSY

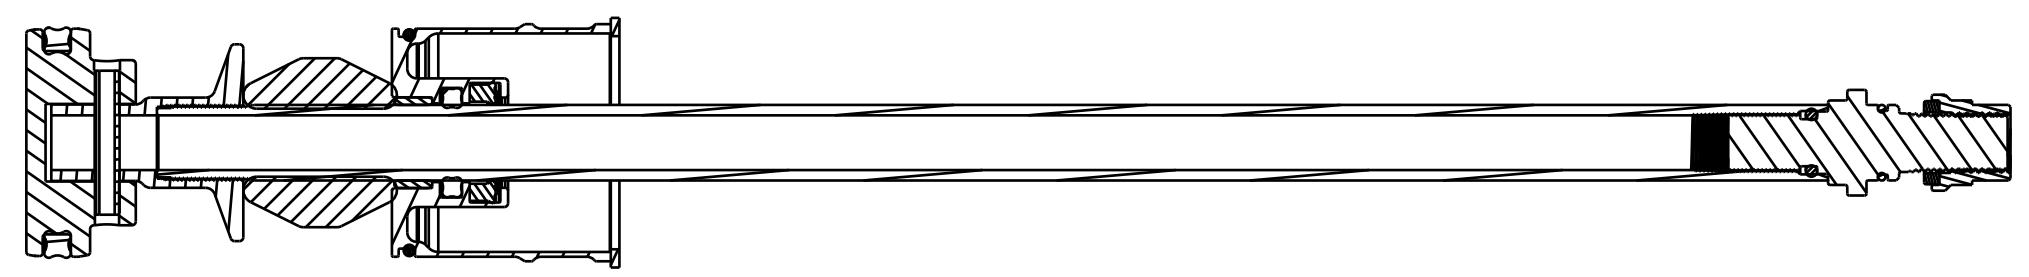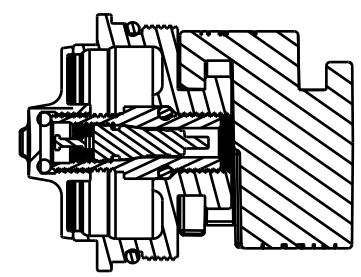

SECTION A-A

FOX		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	34mm Air Spring, FLOAT NA 2		
SIZE	DWG. NO.		
C			
PLOT SCALE	.00:1	SHEET 1 OF 1	

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM