

4

3

2

1

039-00-131  
Spring: [1.690 TLG X .242 ID X 22.0 lb/in] Stainless Steel

029-08-004  
Seals: O-Ring [3.0MM ID x 1.0MM CS] Metric, N-70, Static

820-03-321-KIT  
REBOUND PISTON ASSY

204-74-022  
REBOUND TUBE

TORQUE:  
30±5 IN. LB.

IMPORTANT:  
VERIFY REBOUND SHIM  
IS NOT PINCHED

GREASE:  
THIN LAYER  
OF SLICK HONEY

TORQUE:  
30±5 IN. LB.

LOCTITE:  
ON DROP OF  
RED 262


210-22-244  
Damp Adj Part: Needle, Rebound, High-Flow, 6 Flutes

229-10-047  
REBOUND SHAFT

GREASE:  
THIN LAYER OF  
SLICK HONEY ON BULLET

820-03-450-KIT  
Sealhead Assembly, 2015 10mm Shaft, SKF

820-03-167-KIT  
Rebound Adjuster Assembly, 2011 RC2

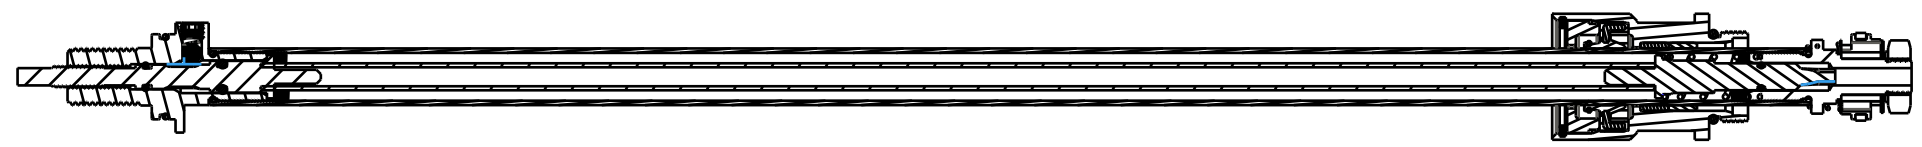

**FOX** FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2016 40  
RC2 Rebound**

SIZE DWG. NO. **820-03-371-KIT**

PLOT SCALE | .00:1 | SHEET 1 OF 1

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1