

4

3

2

1

D

D

C


C

B

B

A

A

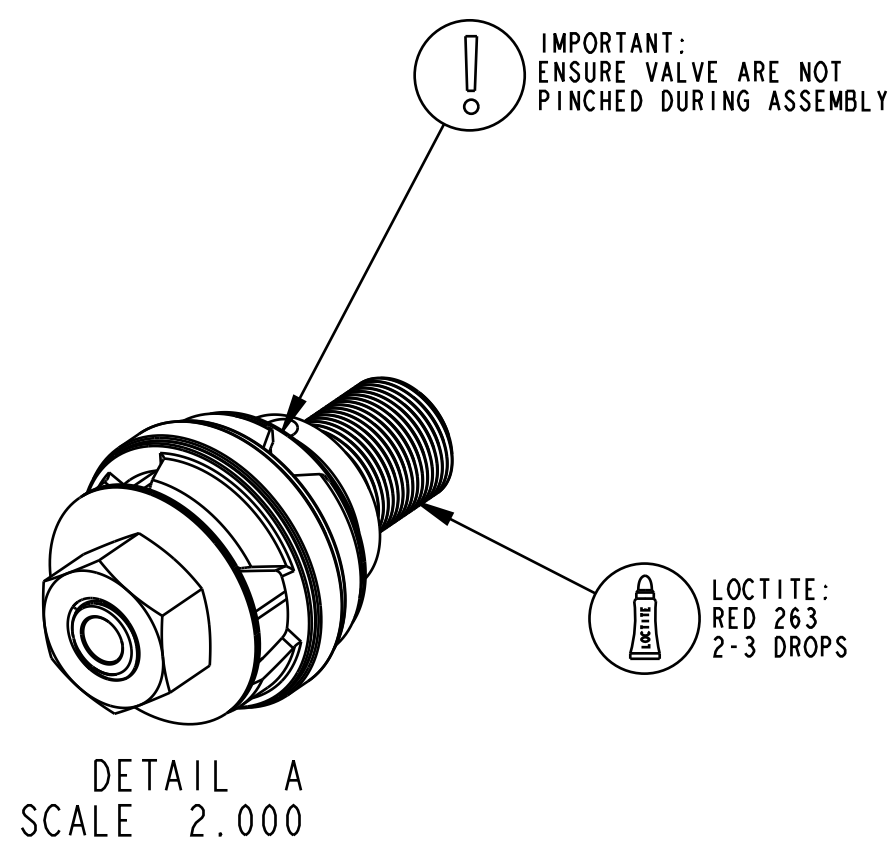

APPLY BLUE MARINE GREASE TO THREADS ON ALUMINUM REBOUND NEEDLES

GREASE: THIN LAYER OF SLICK HONEY

LOCTITE: 2-3 DROPS RED 263 OR FEMALE THREADS

029-08-022 O-RING

TORQUE: 40±5 IN.LB.

210-22-958 BASE STUD

010-01-012 Ball [Ø.1094]

039-00-243 Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

210-03-209 Rebound Needle

029-03-005 O-Ring (-005) [.070 C.S. X 0.101 ID]


820-03-476-KIT 2016 FIT4 Bearing Housing Assy

229-10-275 Damper Shaft

SEE DETAIL A

820-03-458-KIT REBOUND PISTON ASSEMBLY

TORQUE: 40±5 IN.LB.

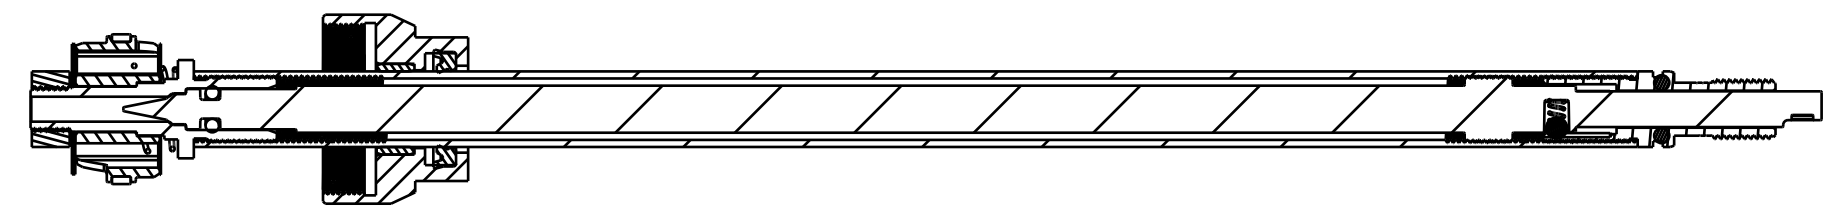

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX	FOX Factory, Inc.	Ph 831-768-1100
	130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	DAMPER SHAFT, GRIP	
SIZE	DWG. NO.	820-03-490-KIT
PLOT SCALE	.00:1	SHEET 1 OF 1

4

3

2

1

ProE ASSEM