

4

3

2

1

D

D

C


C

B

B


A

A

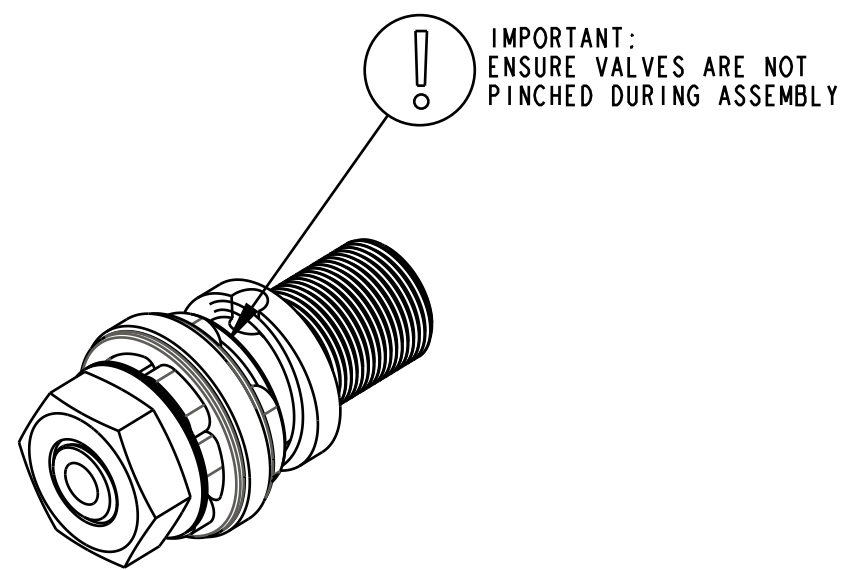

DETAIL A
SCALE 2.000

SEE DETAIL A

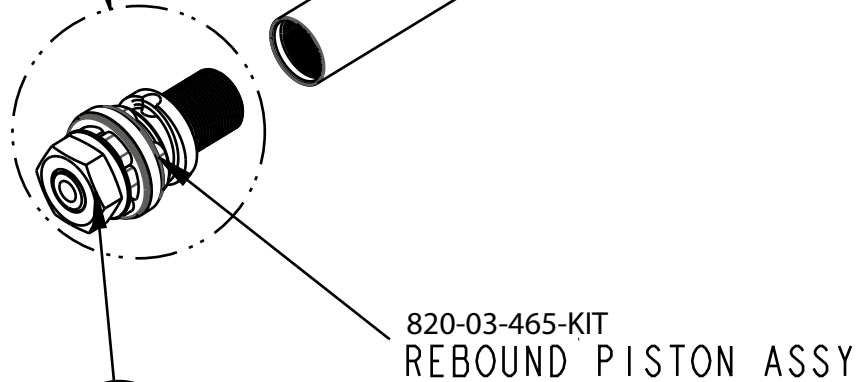

TORQUE:
30±5 IN. LB.

GREASE:
THIN LAYER OF SLICK HONEY
ON BULLET TOOL

GREASE:
THIN LAYER
OF SLICK HONEY

GREASE:
MEDIUM LAYER OF BLUE MARINE
GREASE TO FULL 360° OF THREADS

LOCTITE:
ONE DROP
RED 262

TORQUE:
30±5 IN. LB.

GREASE:
THIN LAYER
OF SLICK HONEY

029-08-047
BASE STUD O-RING

210-22-755
BASE STUD

GREASE:
THIN LAYER BLUE MARINE
GREASE TO BALL

010-01-012
Ball [Ø.1094]

039-00-344


Spring: Detent [.12 TLG X .094 OD X 236 lb/in] SS

210-22-897
REBOUND ADJUST NEEDLE

029-08-026

820-03-464 -KIT
2016 FIT4 Bearing Housing Assy

229-10-137
DAMPER SHAFT

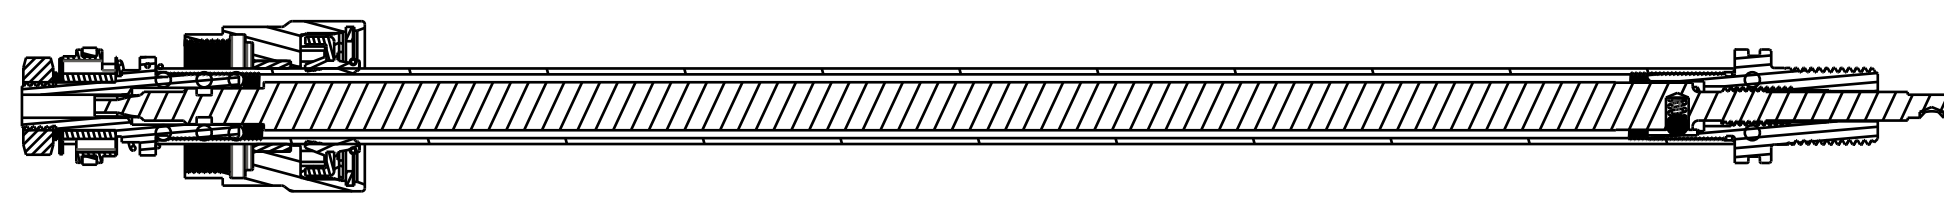

SECTION A-A

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

		FOX Factory, Inc.		Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA		Fax 831-768-9312
TITLE		2016 FIT4 Damper Shaft Assy		
SIZE	DWG. NO.	820-03-469-KIT		
C				
PLOT SCALE .00 : 1		SHEET OF 1		

4

3

2

1

ProE ASSEM