

TORQUE: 150±5 IN-LB

210-03-120 REBOUND KNOB

TORQUE: 5.0±1.0 IN-LB

LOCTITE: BLUE 242 ONE DROP

018-01-004-A

Fastener, Standard: Screw [#8-32 X 0.250 TLG]

241-00-011 BOTTOM NUT

820-05-335-KIT BASE STUD INTERFACE PARTS

241-01-011 CRUSH WASHER

CARTRIDGE ASSY

TORQUE: 220±5 IN-LB

036-01-043 Seals: U-Cup, Shore 70A, 2013 Fit-CTD and CTD-ADJ

210-22-923 Compression Adjust Knob, F-S, FIT4

TORQUE: 11±3 IN-LB

GREASE: THIN LAYER BLUE MARINE


210-22-922 LOCKOUT KNOB

019-01-095

820-05-330-KIT TOPCAP INTERFACE PARTS

5 DO NOT TIGHTEN FASTENER AGAINST COMPRESSION ADJUSTER HARD STOP, USE TOOL TO PREVENT KNOB FROM TURNING

SEE DETAIL A

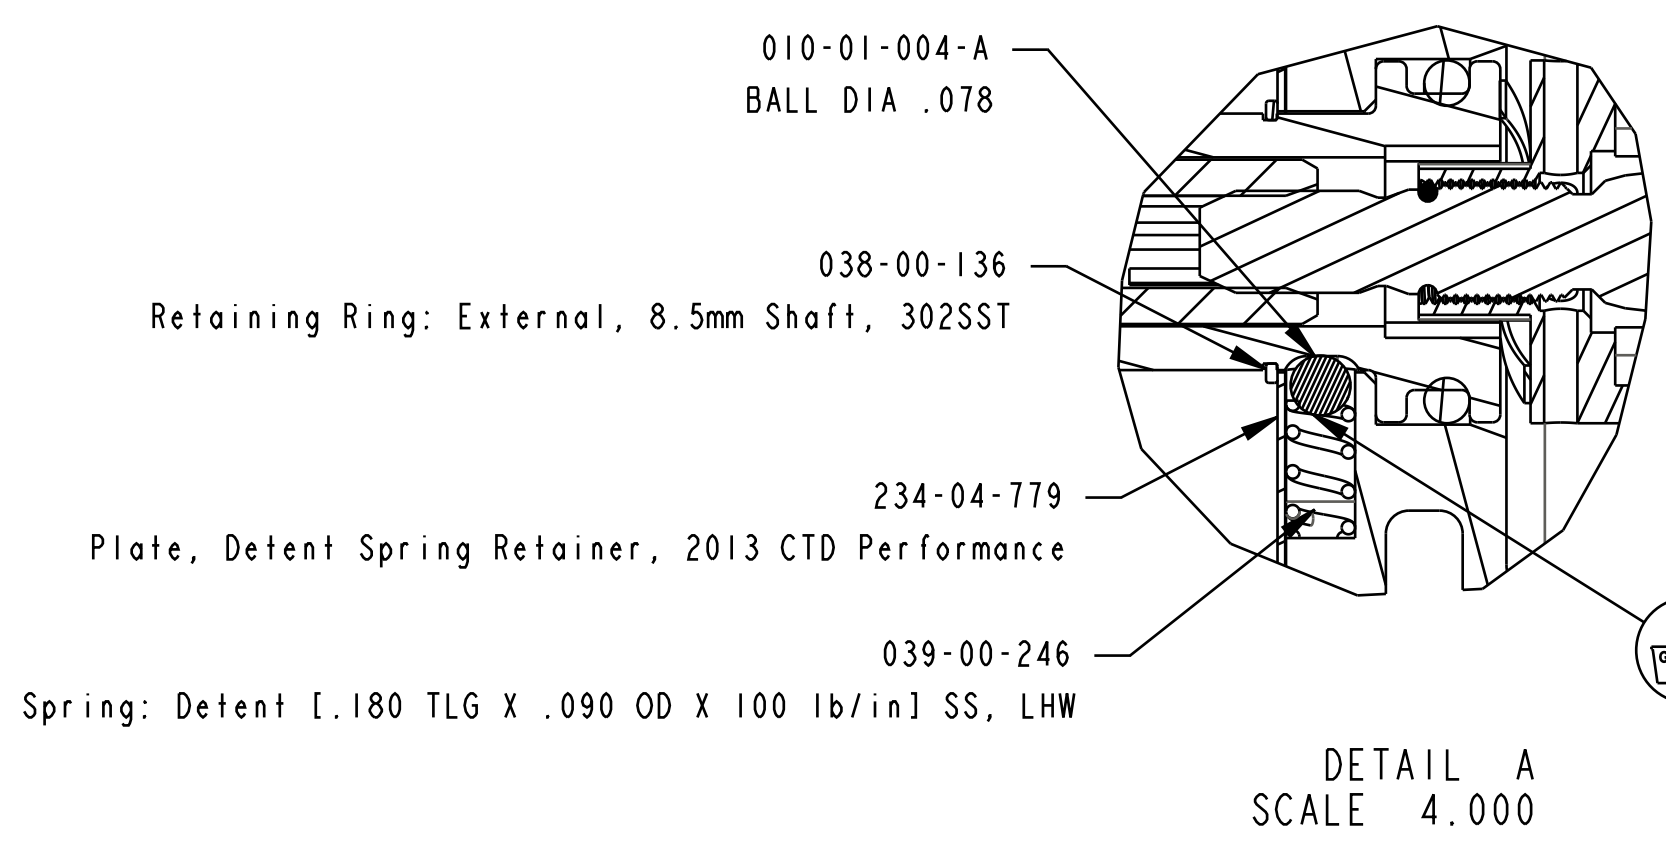

GREASE: THIN LAYER OF BLUE MARINE ON BALL

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOR PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX Factory, Inc.
130 Hangar Way, Watsonville, CA 95076 USA
Ph 831-768-1100 Fax 831-768-9312

TITLE: **2017 34 Factory Series FIT4 Cart Assy Complete**

SIZE DWG. NO.: **820-08-696-KIT**

PLOT SCALE 1.00:1 SHEET 1 OF 1