


4

3

2

1

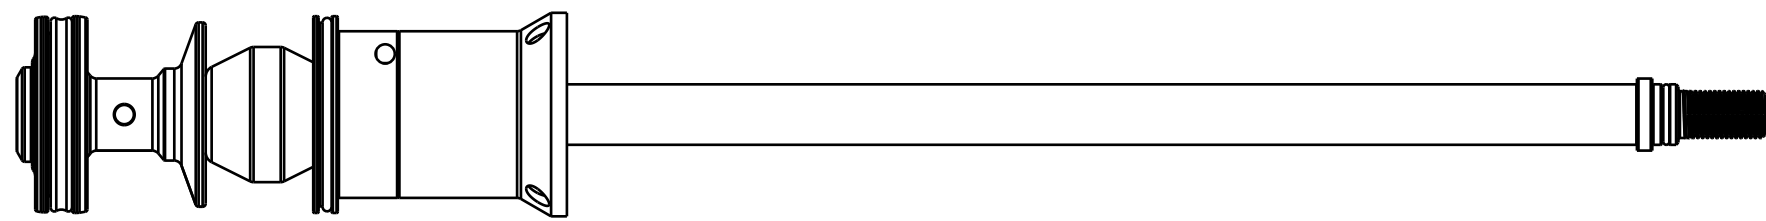

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

GREASE:  
THIN LAYER  
OF SLICK HONEY

234-04-759  
NEG PLATE TUBE

234-04-627  
NEG PLATE SPACER

TORQUE:  
50±5 IN.LB.

GREASE:  
THIN LAYER  
OF SLICK HONEY

820-02-317-KIT  
NEG PLATE ASSY

234-04-629  
Topout Bumper, FLOAT NA

LOCTITE:  
1-2 DROPS  
RED 262

229-10-114  
PISTON SHAFT

GREASE:  
THIN LAYER  
OF SLICK HONEY

TORQUE:  
50±5 IN.LB.

234-04-621  
PISTON BASE

GREASE:  
THIN LAYER  
OF SLICK HONEY

234-04-625  
Piston Bolt, FLOAT NA

LOCTITE:  
1-2 DROPS  
RED 262

(234-04-622)

029-00-106  
O-Ring (-106) [.103 C.S. X .206 ID]

234-04-622  
Bushing, Transfer Shaft, FLOAT NA


029-03-014  
O-Ring (-014) [.070 C.S. X .489 ID]

035-06-214  
PISTON SEAL

234-04-818  
PISTON, FLOAT NA

TORQUE:  
50±5 IN.LB.

LOCTITE:  
1-2 DROPS  
RED 262

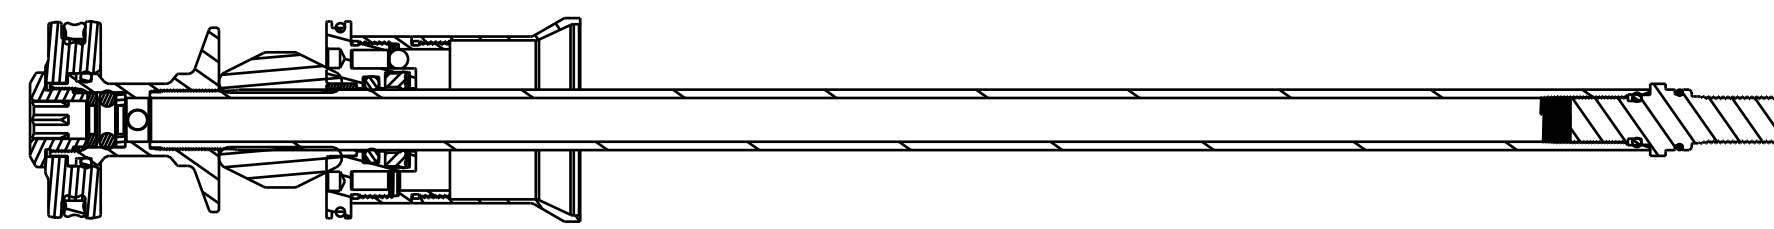

SECTION A-A

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**36 831 Air Shaft,  
FLOAT NA**

SIZE DWG. NO.  
**C 820-02-314-KIT**

PLOT SCALE 0.80 : 1 SHEET 1 OF 1

4

3

2

1

ProE ASSEM