

4

3

2

1

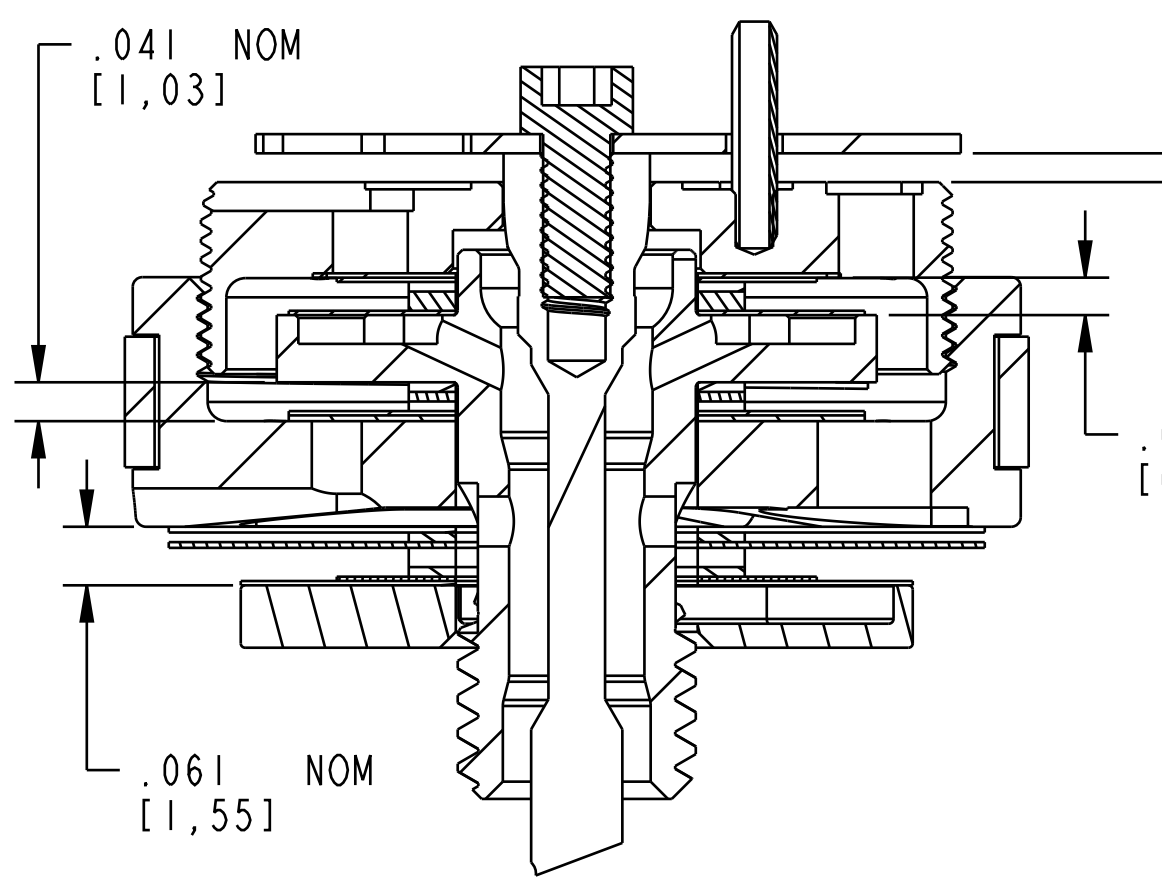


PLATE LIFT FROM CLOSED TO MIDDLE POSITION, ALL NON REMOTES + 1RD [5]

PLATE LIFT FROM CLOSED TO OPEN POSITION, ALL CABLE REMOTES EXCEPT NOTE [5]

Piston: Lockout, Float DPS [.200 TLG, M20 X 0.5] 416SS

Valve: [0.550 OD X 0.252 ID X 0.0045 TH]


Piston Bolt: Dish WRD w/ check [1/4-28 X 5/8 Hex]

TORQUE: 22±2 IN.LB. Custom socket: 398-00-638

TORQUE: 60±5 IN.LB. Custom Socket: 398-00-637

Piston Assembly: 2016 Float DPS, [Ø 0.940 Bore] w/ Glyde Ring

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- 1. SHOCK SHOULD HAVE 12-15 REBOUND CLICKS
 - [2] 1 OR 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS .030" MIN SPACING
 - [3] 1 OR 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST NUMBER OF REBOUND CLICKS .010" MIN SPACING
 - [4] 1 OR 2 SPACERS MAY BE ADDED OR REMOVED TO ADJUST LOCKOUT PLATE LIFT .010" MIN SPACING
 - [5] USE .030-.047 LIFT SPEC FROM CLOSED TO OPEN FOR REMOTES WITH 210-30-090 CAM (TREK)

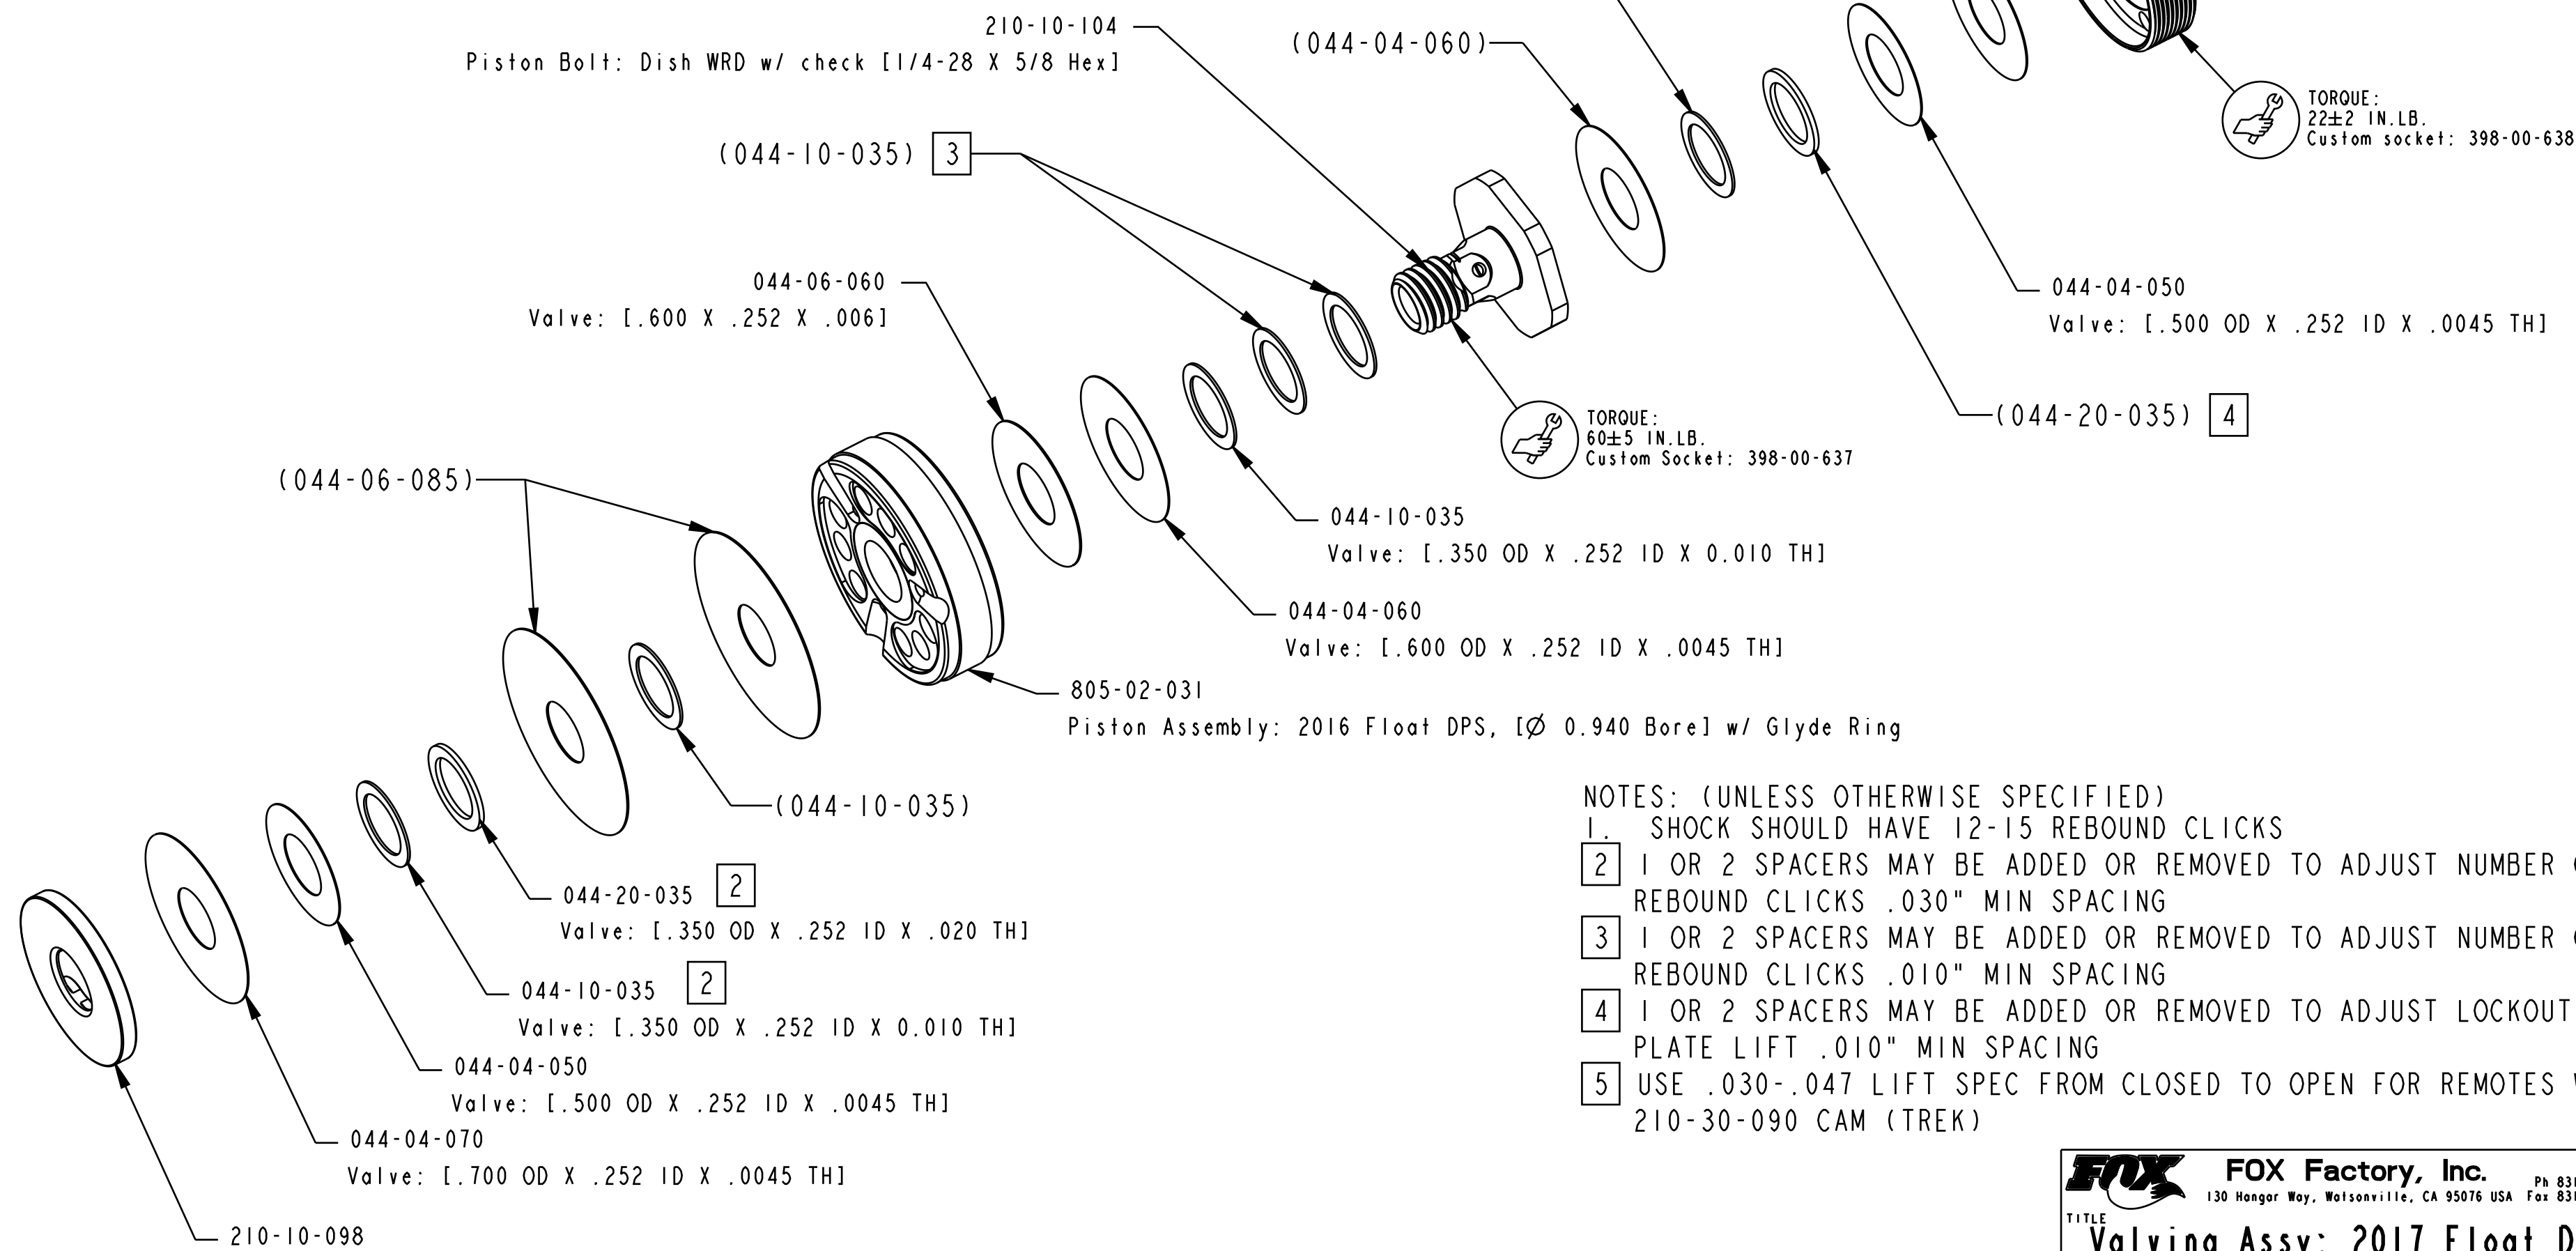

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX FOX Factory, Inc. Ph 831-768-1100
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
Valving Assy: 2017 Float DPS, R/C, CXL, RM, CMF [0.940 Bore]

SIZE DWG. NO.
C 807-06-198-KIT

PLOT SCALE 2.00:1 SHEET 1 OF 1

4

3

2

ProE ASSEM