


Fastener, Standard: Nut, [#1-64 x 5/32 Hex], 18-8 SS

Fastener, Standard: Washer, L/O Plate, [.700 O.D. x .076 I.D. x .020 TH]

3 IMPORTANT: NOTE PART ORIENTATION CRITICAL TO SHOCK FUNCTION.

4 IMPORTANT: SUB-ASSY-LEVER HSG MTG PLATE MUST MOVE FREELEY IN ENDCAP.

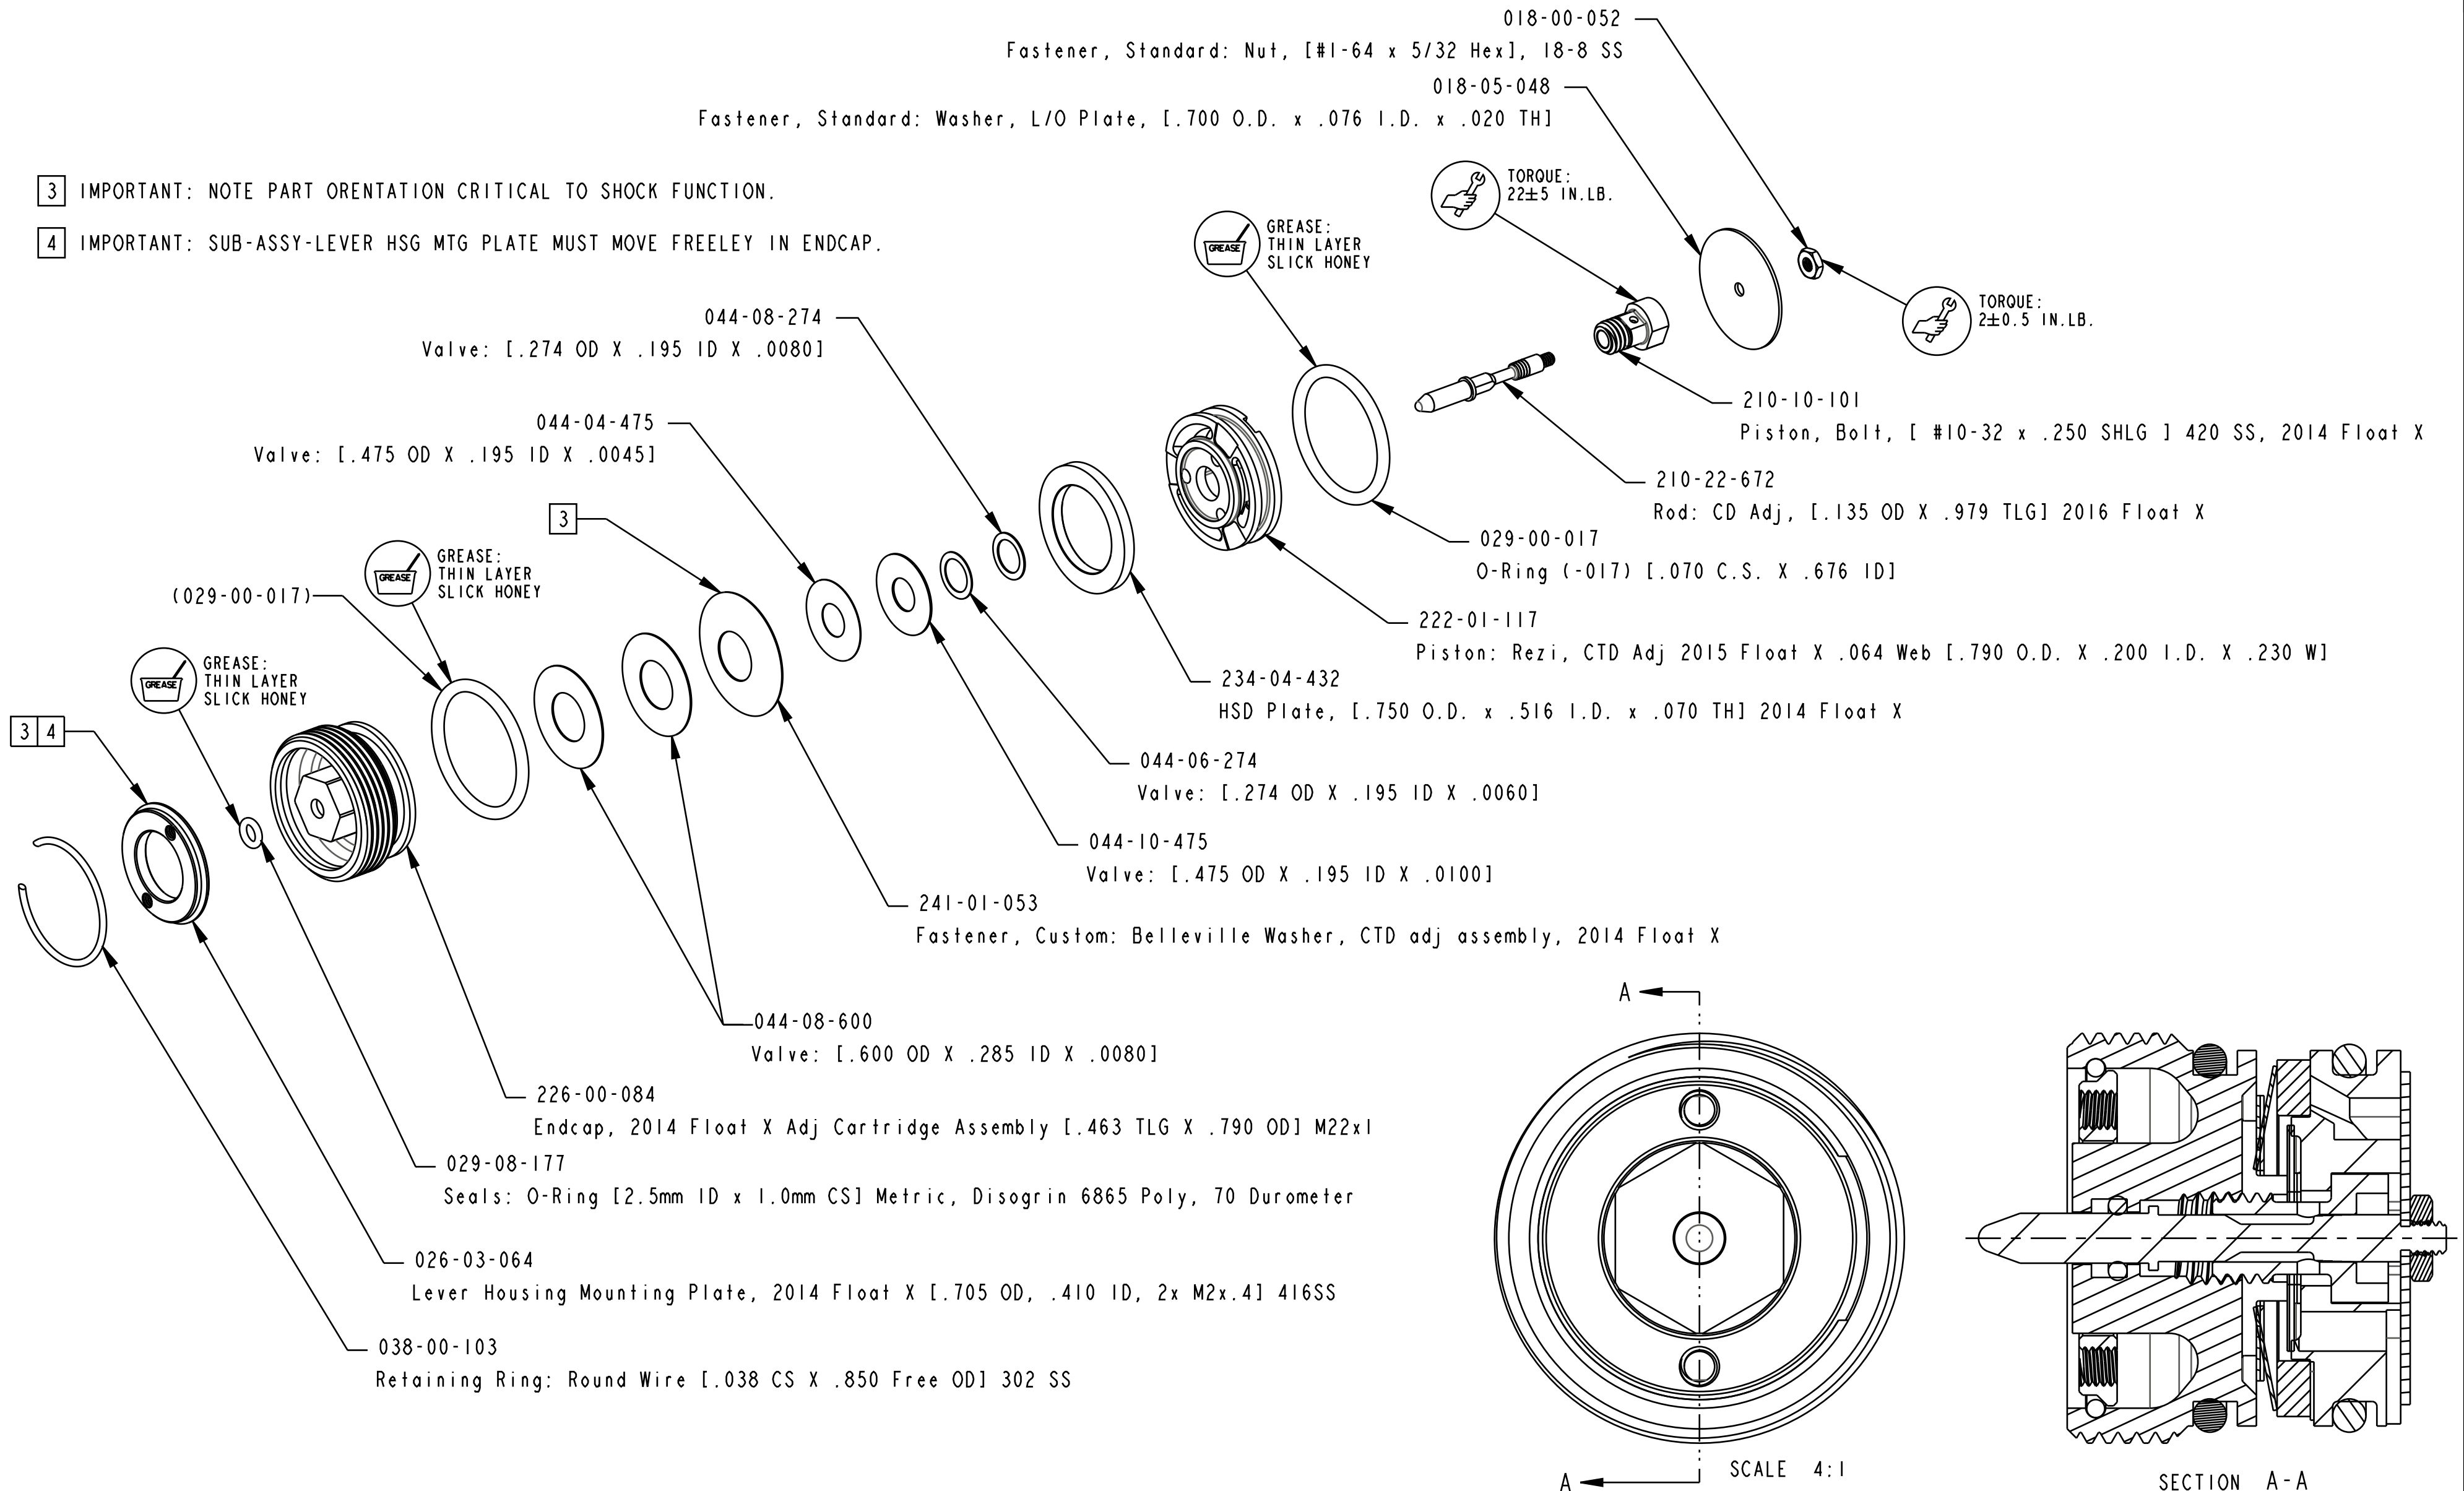

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX Factory, Inc.**  
130 Hangar Way, Watsonville, CA 95076 USA  
Ph 831-768-1100  
Fax 831-768-9312

TITLE  
**Damping Adj Assy;  
2016 Float X Rezi Cartridge, CL, CMM**

SIZE DWG. NO.  
**C 815-00-070-KIT**

PLOT SCALE 1:1 SHEET 1 OF 1