


4

3

2

1

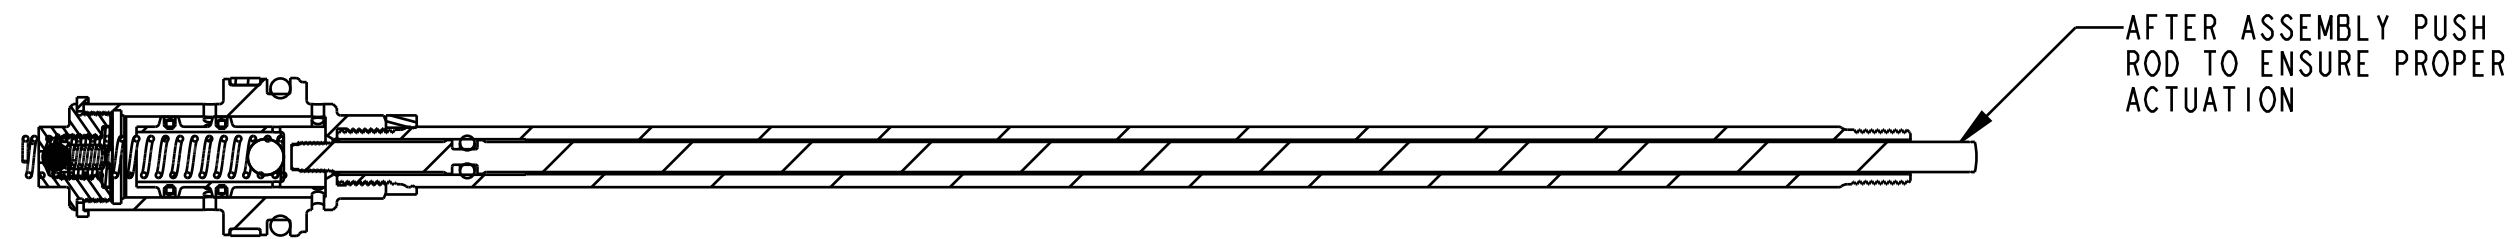

SECTION A-A  
SCALE 1.000

GREASE:  
THIN LAYER  
OF SLICK HONEY

TORQUE:  
40±5 IN.LB.

IMPORTANT:  
NOTE ORIENTATION OF SHAFT  
GROOVE IS ON THIS END

GREASE:  
THIN LAYER  
OF SLICK HONEY

029-08-190  
Seals: O-Ring [1.75mm ID X 1.93mm CS], Metric N-70, Dynamic

225-00-115  
Travel Spacer, IFP, Shaft, Seat Post

GREASE:  
THIN LAYER  
OF SLICK HONEY

TORQUE:  
15±5 IN.LB.

IMPORTANT:  
WHEN TORQUING PART, SHAFT  
MUST BE CLAMPED ABOVE O-RING GROOVE

029-00-114  
O-Ring (-114) [1.103 C.S. X .612 ID]

225-00-171  
Piston, Spool Valve, Seat Post

002-02-064  
Glide Ring, Piston, Seat Post

825-00-073-KIT  
Valve, Spool, Seat Post, Assy

010-01-001  
Ball [Ø 0.1875] Steel

039-00-253  
Spring: Music Wire, 1.375" Long, .218" OD, .028" Wire Diameter

241-01-073  
Washer: Crush, Counter Bore, Seat Post

825-00-034-KIT  
Valve, Pressure, Relief, Seat Post, Assy

TORQUE:  
40±5 IN.LB.

SHAFT

PUSH ROD

**FOX** FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
Assy Dwg, Piston,  
Seat Post, 2018 Transfer

SIZE DWG. NO.  
C

PLOT SCALE 0.90:1

SHEET 1 OF 1

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.