


4

3

2

1

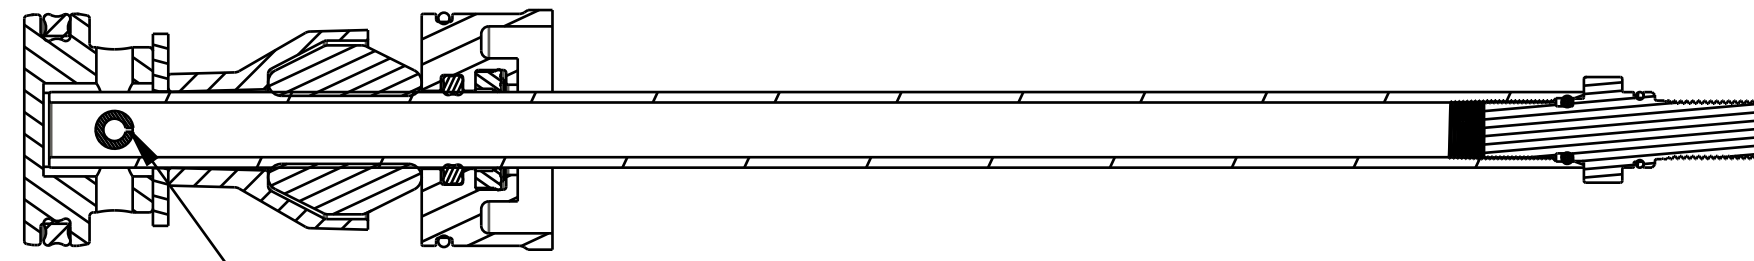

! IMPORTANT:  
ORIENT GAP IN PIN TOWARDS  
TOPOUT SPACER ±15°

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

234-04-655  
Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

234-04-629  
Topout Bumper, FLOAT NA

029-08-060

029-08-022

TORQUE:  
50±5 IN LB

GREASE:  
THIN LAYER  
OF SLICK HONEY

820-02-414-KIT  
Neg Plate Subassembly, 2018 FLOAT LC NA 2, 32, Short Travel, 1.132 Bore, SC

234-04-738  
Topout Spacer, FLOAT NA 2, 0.040" Thick, Aluminum

LOCTITE:  
1-2 DROPS  
RED 262

NO LOCTITE ON O-RING GLANDS

035-00-212  
Seals: Q-Ring [(-212) 0.139 C.S. X 0.859 ID]

222-01-332  
Piston, FLOAT NA 2 LC, 32, 1.132 Bore

Shafts:  
230-17-002: Shaft, FLOAT Air Spring, NA 2 LC, 90mm & Step Cast 100mm  
230-17-000: Shaft, FLOAT Air Spring, NA 2 LC, Step Cast 80mm  
230-17-016: Shaft, FLOAT Air Spring, NA 2 LC, Step Cast 40mm

! IMPORTANT:  
PRESS PIN UNTIL CENTERED

060-01-010  
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

! IMPORTANT:  
VERIFY SEAL IS NOT  
TWISTED AFTER INSTALL

**FOX** FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
2018 32mm 27.5in/29in 40mm/80mm/100mm  
FLOAT NA2 SC 1.132 Bore Air Shaft Assemblies

SIZE DWG. NO.  
C

PLOT SCALE 1:1:1

SHEET 1 OF 1

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM