


4

3

2

1

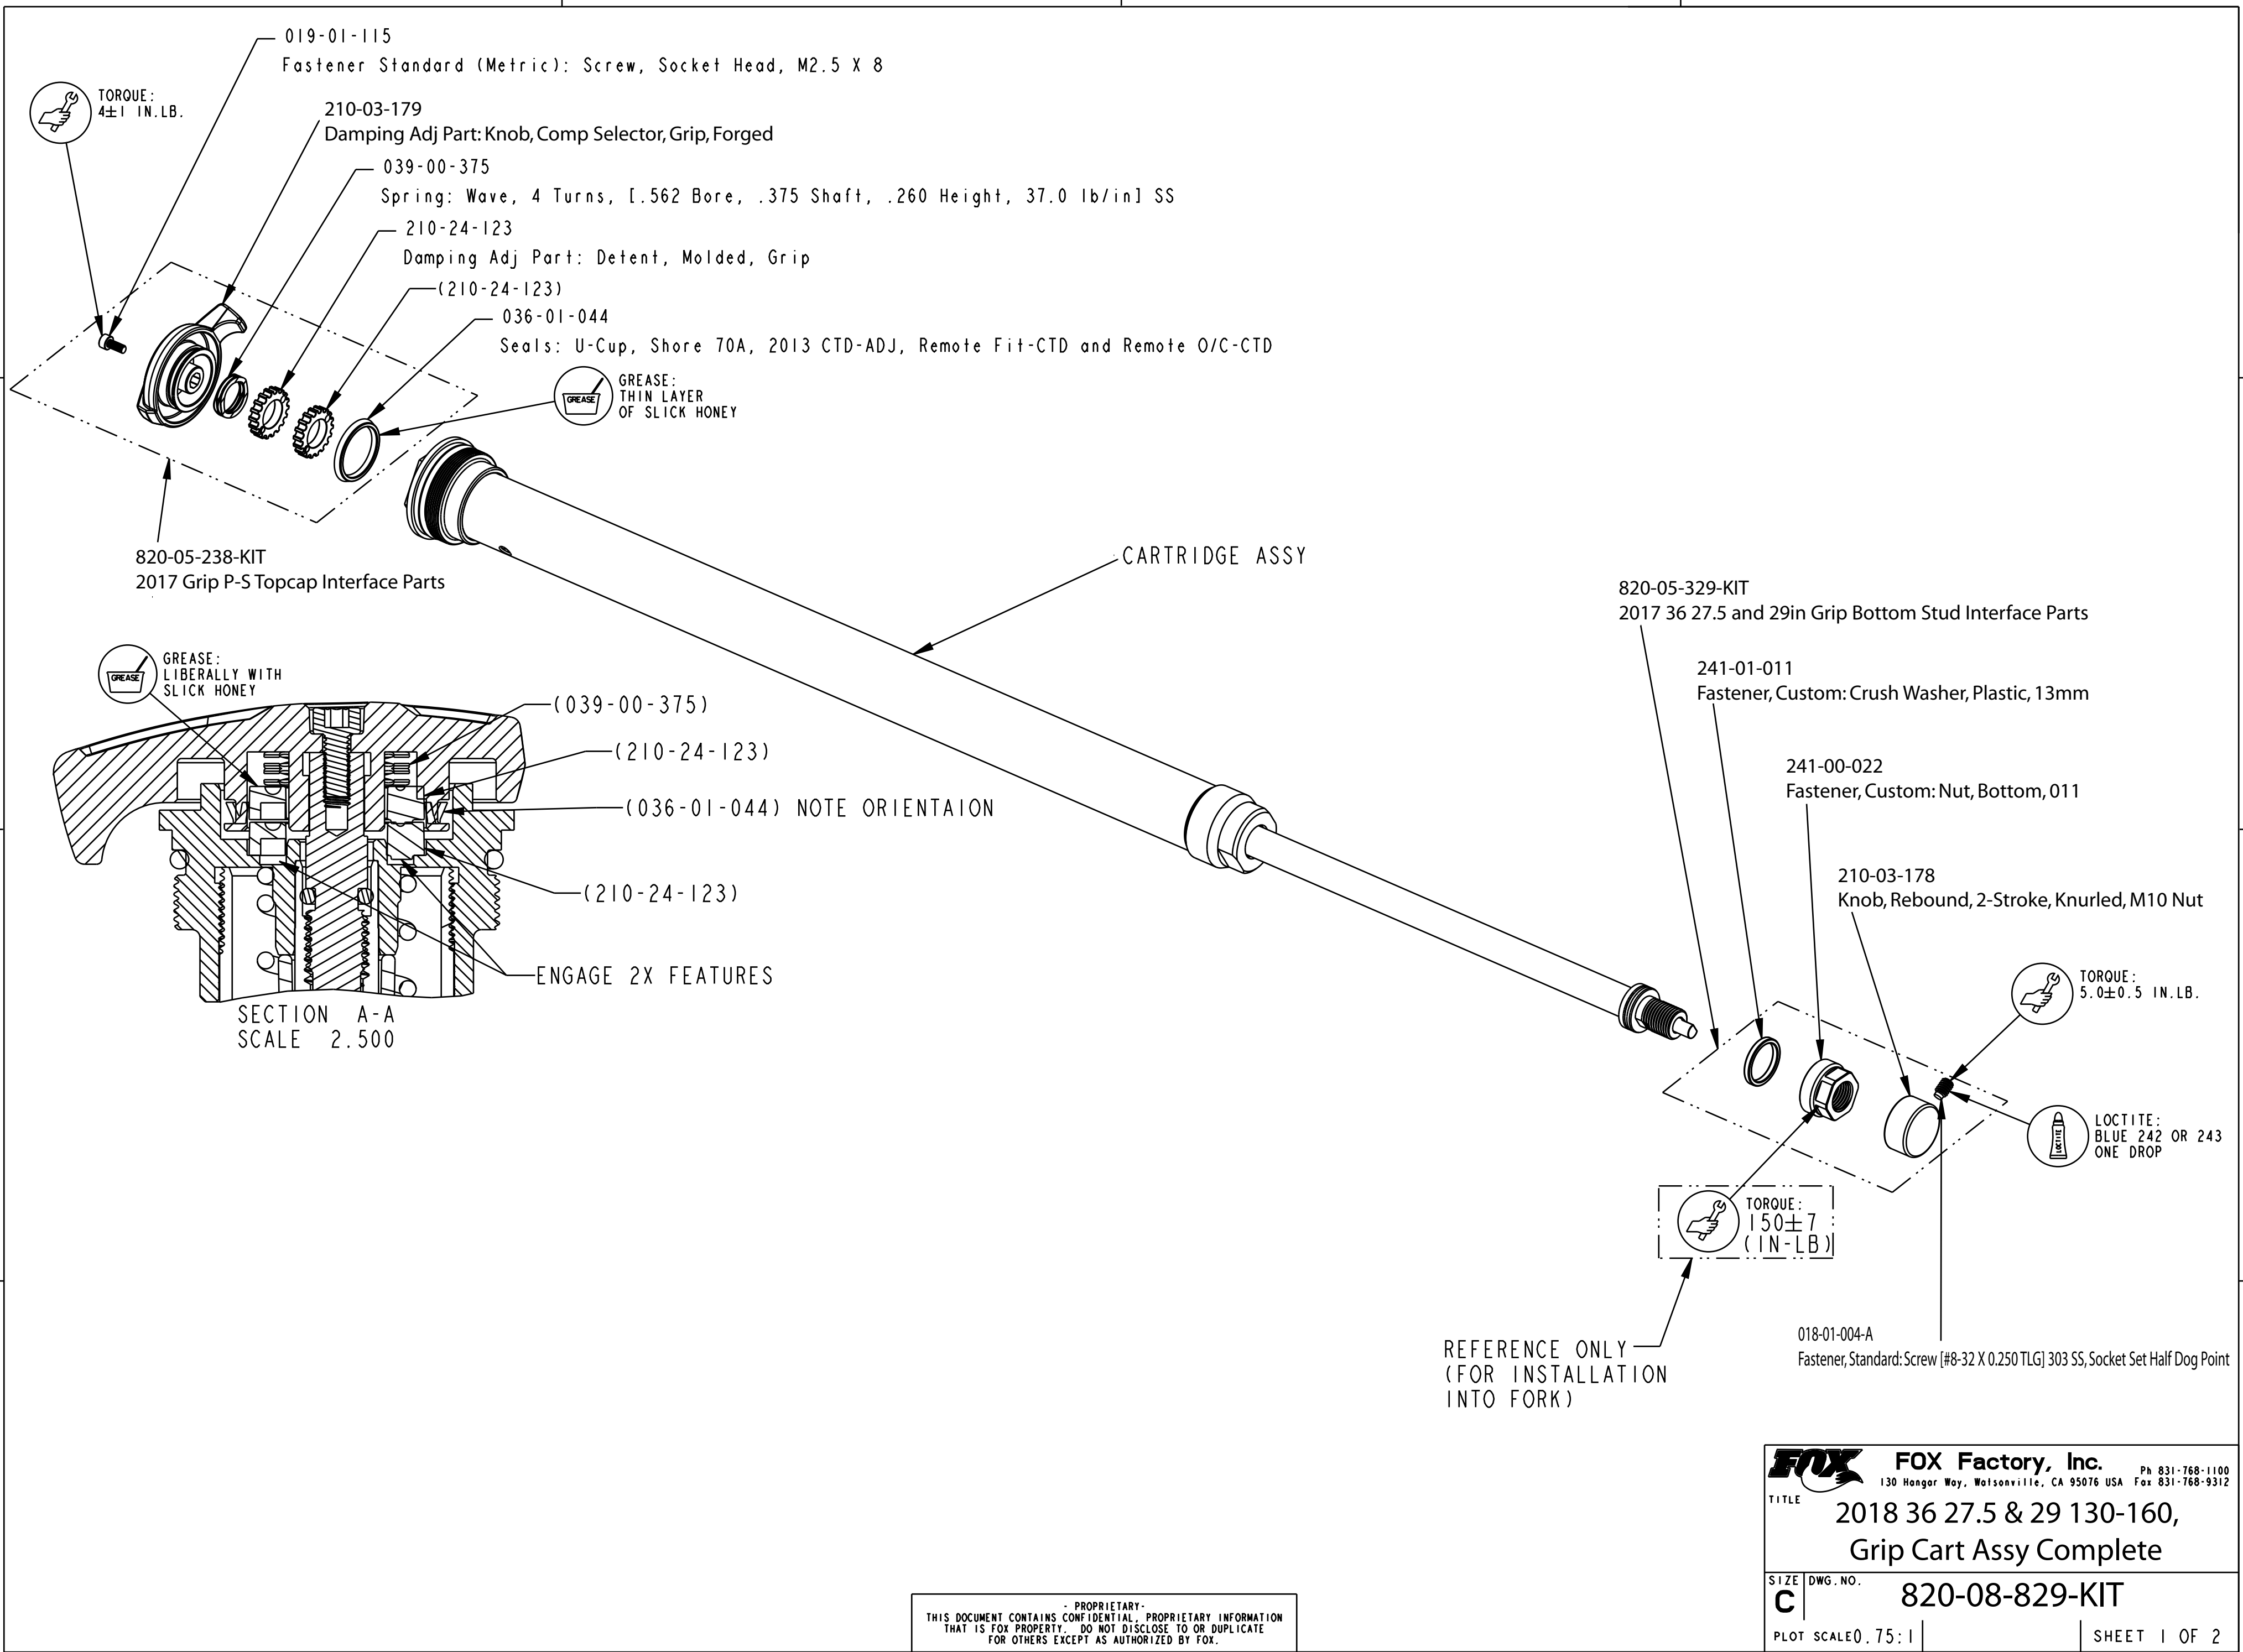

019-01-115
Fastener Standard (Metric): Screw, Socket Head, M2.5 X 8

TORQUE:
4±1 IN. LB.

210-03-179
Damping Adj Part: Knob, Comp Selector, Grip, Forged

039-00-375
Spring: Wave, 4 Turns, [.562 Bore, .375 Shaft, .260 Height, 37.0 lb/in] SS

210-24-123
Damping Adj Part: Detent, Molded, Grip

(210-24-123)

036-01-044
Seals: U-Cup, Shore 70A, 2013 CTD-ADJ, Remote Fit-CTD and Remote O/C-CTD

GREASE:
THIN LAYER
OF SLICK HONEY

820-05-238-KIT
2017 Grip P-S Topcap Interface Parts

CARTRIDGE ASSY

820-05-329-KIT
2017 36 27.5 and 29in Grip Bottom Stud Interface Parts

GREASE:
LIBERALLY WITH
SLICK HONEY

(039-00-375)

(210-24-123)

(036-01-044) NOTE ORIENTAION

(210-24-123)

ENGAGE 2X FEATURES

SECTION A-A
SCALE 2.500

241-01-011
Fastener, Custom: Crush Washer, Plastic, 13mm

241-00-022
Fastener, Custom: Nut, Bottom, 011

210-03-178
Knob, Rebound, 2-Stroke, Knurled, M10 Nut

TORQUE:
5.0±0.5 IN. LB.

LOCTITE:
BLUE 242 OR 243
ONE DROP

TORQUE:
150±7
(IN-LB)

REFERENCE ONLY
(FOR INSTALLATION
INTO FORK)

018-01-004-A
Fastener, Standard: Screw [#8-32 X 0.250 TLG] 303 SS, Socket Set Half Dog Point

PROPRIETARY
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX		FOX Factory, Inc.	Ph 831-768-1100
		130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	2018 36 27.5 & 29 130-160, Grip Cart Assy Complete		
SIZE	DWG. NO.	820-08-829-KIT	
C	PLOT SCALE 0.75:1		SHEET 1 OF 2

4

3

2

ProE ASSEM