

038-00-065  
Retaining Ring: Snap, Smalley, Internal, Custom, Ø.923 BORE

241-01-029  
Bladder retainer, 011 RC2

210-22-420  
Lower Bladder Ring, Snap Ring, 011 RC2

IMPORTANT:  
ENSURE RETAINING RING IS FULLY  
SEATED INTO GROOVE FULL 360°

820-03-371-KIT  
2016 40 RC2, NBO Rebound Assy

GREASE:  
THIN LAYER  
ON INNER AND OUTER SEAL BEADS

TORQUE:  
75±5 IN.LB.

GREASE:  
THIN LAYER OF SLICK HONEY  
ON INNER SURFACE

TORQUE:  
75±5 IN.LB.

210-22-391  
Bladder, 2011 36\_40

207-80-000  
Cartridge, Machined, 014 40 NBO RC2 LW

GREASE:  
THIN LAYER OF  
SLICK HONEY

GREASE:  
THIN LAYER OF SLICK HONEY  
ON INNER SURFACE

TORQUE:  
75±5 IN.LB.

820-03-395-KIT  
2015 36/40 RC2 Base Valve Assembly

210-22-418  
Upper Bladder Ring, 011 RC2


029-03-026-A  
Seals:O-Ring [(-026) .070 C.S. X 1.239 ID] Standard, N-70, Static

210-22-902  
Topcap Body, Black Ano, 2015 40 RC2, Stealth, Heritage

820-03-187-KIT  
2011 RC2 Adjuster Assy

IMPORTANT:  
VERIFY THAT RETAINING RING  
IS COMPLETELY SEATED

038-00-059  
Retaining Ring, Internal, VHM-14

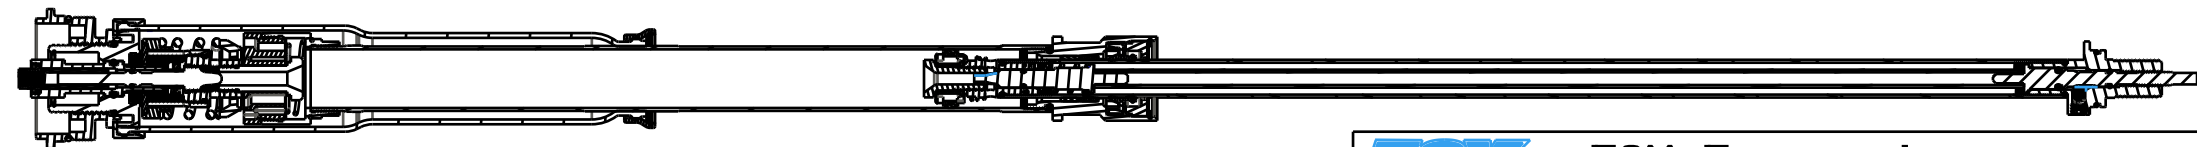

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2016 Cartridge Assy,  
40 RC2 NBO, Stealth**

SIZE DWG. NO.  
**C**

PLOT SCALE 0.50:1 SHEET 1 OF 1