


DETAIL A

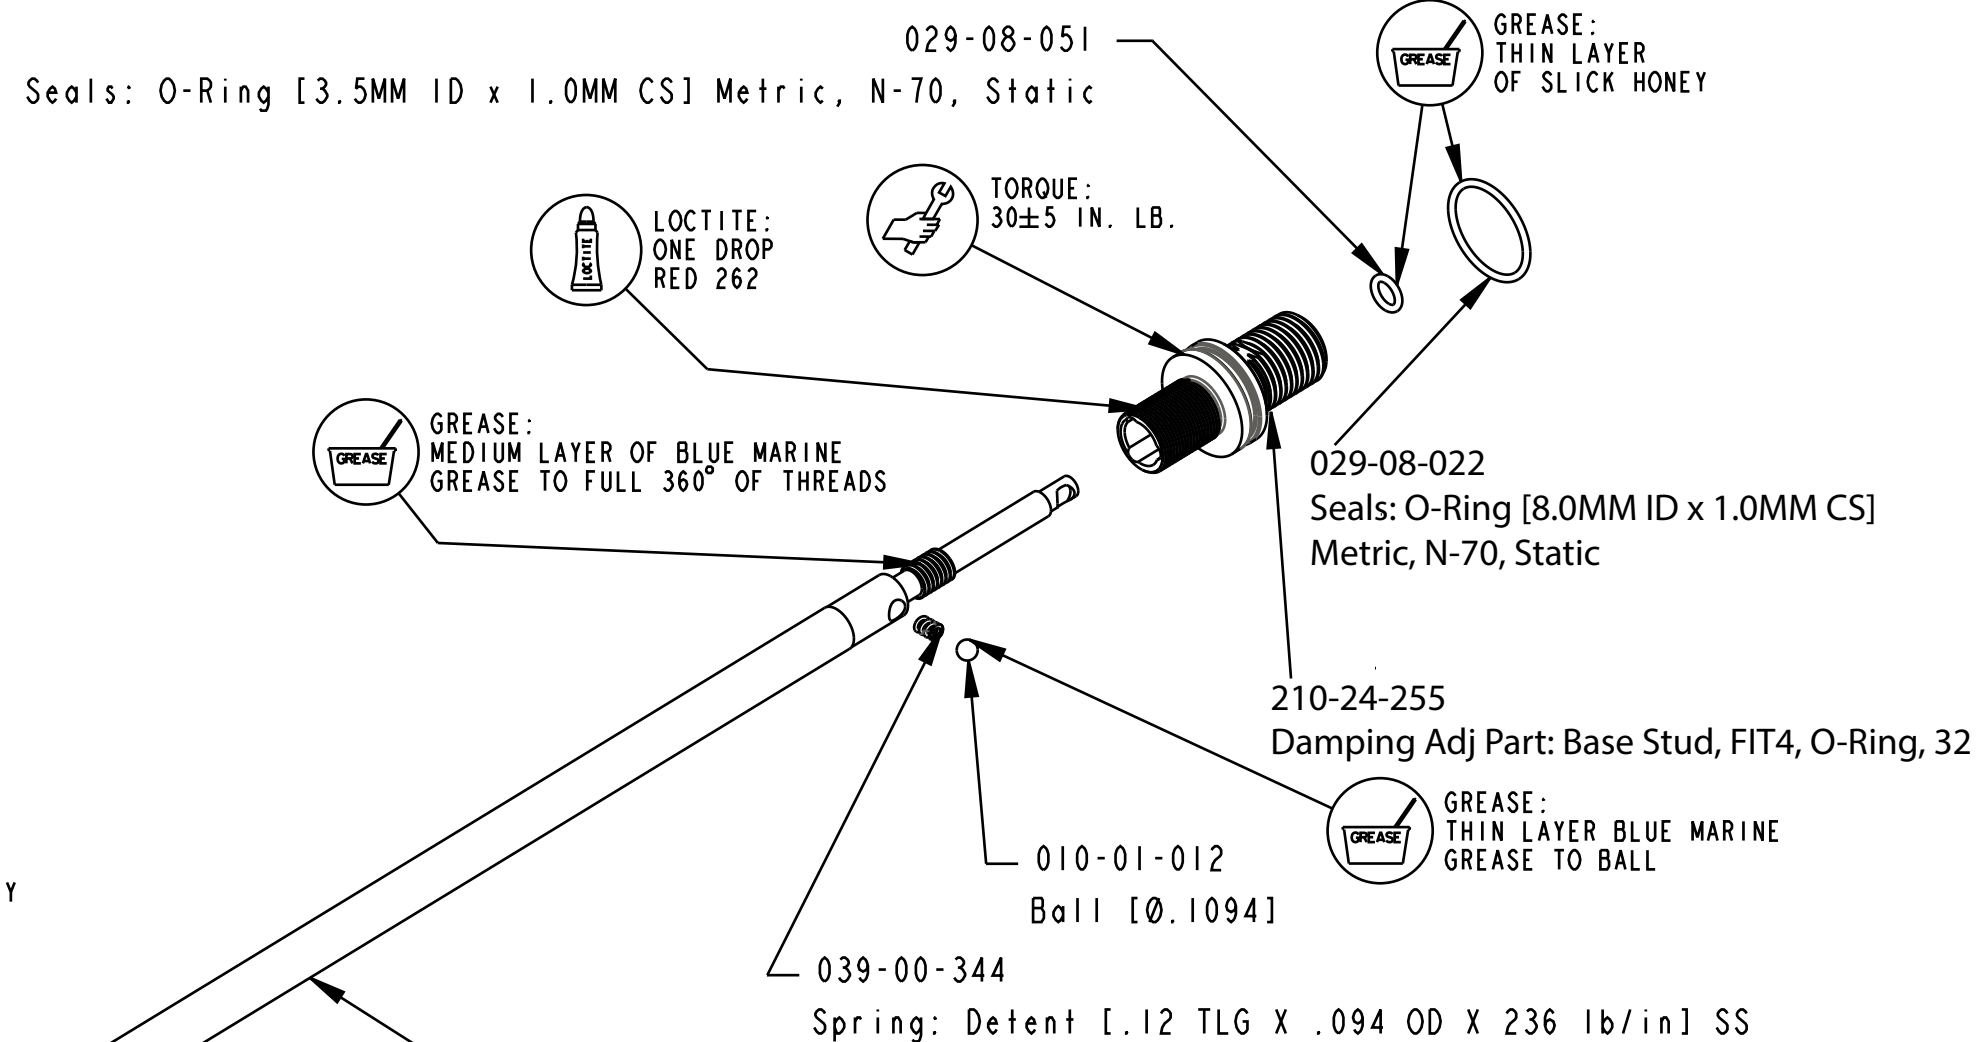


GREASE: THIN LAYER OF SLICK HONEY ON BULLET TOOL

GREASE: THIN LAYER OF SLICK HONEY

REBOUND NEEDLES:  
 210-22-894: Rebound Adjust Needle, All MY, 32mm F29 Chassis, FIT4  
 210-22-890: Rebound Adjust Needle, All MY, 32mm 26/27.5 Chassis, FIT4

029-08-026  
Seals: O-Ring [2.0 MM ID x 1.5 MM CS] Metric, N-60, Static

820-03-464-KIT  
2016 FIT4 Bearing Housing Assy

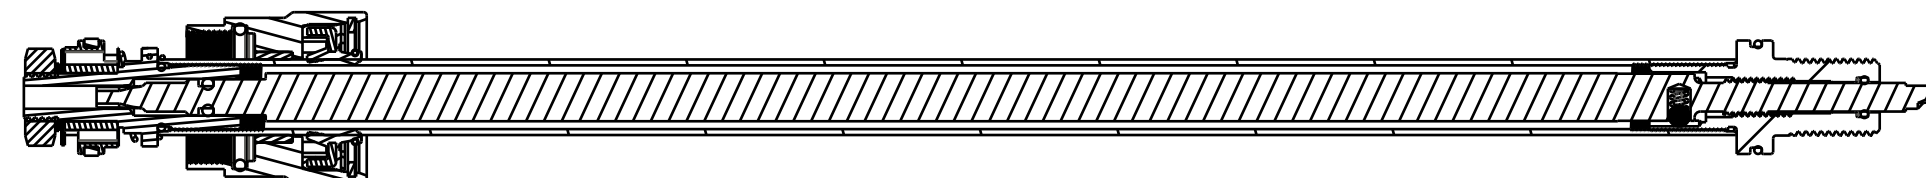

SECTION A-A

DAMPER SHAFTS:  
 229-10-134: (T) Shaft, Damper, 10mm, All MY, 32mm Chassis, F29, FIT4  
 229-10-130: (T) Shaft, Damper, 10mm, All MY, 32mm Chassis 26/27.5, FIT4

REBOUND PISTON ASSEMBLIES:  
 820-03-486-KIT: 2016 FIT4 Rebound Piston Assy, Short Travel  
 820-03-465-KIT: 2016 FIT4 Rebound Piston Assy

TORQUE: 30±5 IN. LB.

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** **FOX Factory, Inc.** Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE **2018 32mm P-S FIT4 Remote Damper Shaft Assemblies**

SIZE DWG. NO. **C**  
 PLOT SCALE | .00 : 1 | SHEET | OF | 1