

4

3

2

1

AIR SHAFT ASSEMBLIES:
 820-02-407-KIT: Air Shaft Assy, FLOAT, 2018 32 Rhythm 100
 820-02-406-KIT: Air Shaft Assy, FLOAT, 2018 32 Rhythm 110
 820-02-404-KIT: Air Shaft Assy, FLOAT, 2018 32 Rhythm 120

241-00-005
 Fastener, Custom: Nut, Bottom, R_RL_RLC

241-01-002
 Fastener, Custom: Crush Washer, Plastic, R_RL_RLC

TORQUE:
 50±5 IN.LB.
 (INTO FORK CHASSIS)

IMPORTANT:
 INSPECT 100% THAT RETAINING RING
 IS FULLY INSTALLED INTO GROOVE FULL 360°

038-00-091
 Retaining Ring: Internal, Smalley EH-29-S02, 302 SS

234-04-881
 Air Cap, FLOAT NA 2, 32 & 34, Blue Ano



029-03-008
 O-Ring (-008) [.070 C.S. X .176 ID]

820-05-418-KIT
 Topcap Assy, 2018, FLOAT LC NA 2, 32, Black

TORQUE:
 220±5 IN.LB.
 (INTO FORK CHASSIS)

APPLY GREASE (SLICK HONEY) AROUND PISTON, SHAFT AND ON
 ENTIRE LENGTH OF PISTON BORE OF UPPER TUBE.

234-04-811
 Volume Spacer, FLOAT NA 2, 32

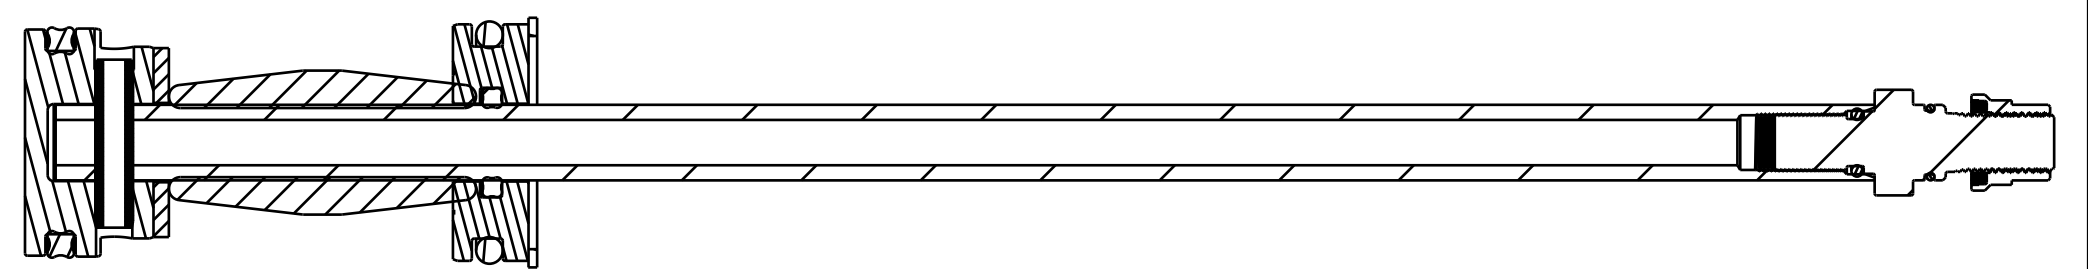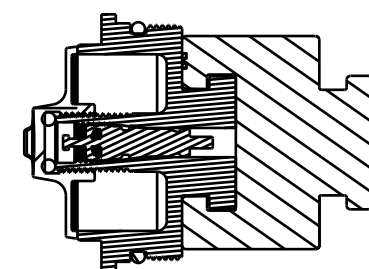

SECTION A-A

FOX	FOX Factory, Inc.	Ph 831-768-1100
	130 Hangar Way, Watsonville, CA 95076 USA	Fax 831-768-9312
TITLE	2019 32mm Rhythm Air Spring Assemblies	
SIZE	DWG. NO.	
C		
PLOT SCALE .00 : 1	SHEET 1 OF 1	

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1

ProE ASSEM