

4

3

2

1

D

D

C

C

B

B

A

A

TOPCAP ASSEMBLIES:  
 820-05-595-KIT: 2020 36 FIT4 F-S Topcap Assy, Black Ano  
 820-05-599-KIT: 2020 36 E-Bike+ FIT4 F-S Topcap Assy, Black Ano

038-01-073  
 Retaining Ring: Wire [ .280 OD X .024 CS ] SS

210-22-920  
 Compression Adjust Coupler, F-S, FIT4

TORQUE:  
 55±5 IN LBS

029-08-068  
 Seals: O-Ring [ 3.0MM ID x 1.5MM CS ] Metric, N-70, Static

039-00-243  
 Spring: Detent [ .138 TLG, .087 OD, 48 lb/in ]

010-01-012  
 Ball [ Ø.1094 ]


GREASE:  
 THIN LAYER OF  
 SLICK HONEY ON BALL

ASSEMBLE THESE PARTS AFTER OIL FILL

820-03-609-KIT  
 2020 36 FIT4 8mm, Bladder Assy

820-03-606-KIT  
 2020 36 FIT4 8mm Damper Shaft Assy

TORQUE:  
 55±5 IN LBS

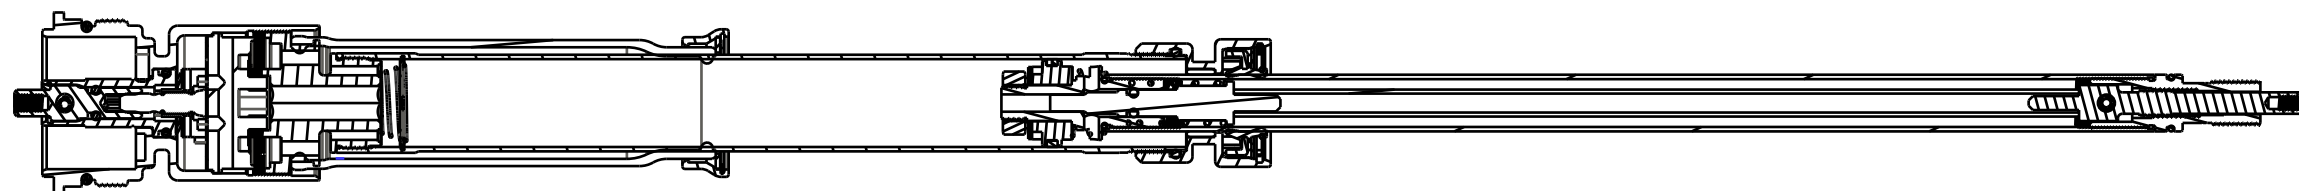

SECTION A-A  
 SCALE 0.750

- PROPRIETARY -  
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** FOX Factory, Inc. Ph 831-768-1100  
 130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
 2020 36 FIT4 F-S 3 Pos Adj  
 Cartridge Assemblies

SIZE DWG. NO.  
**C**  
 PLOT SCALE 1.0:1 SHEET 1 OF 1

4

3

2

1