


4

3

2

1

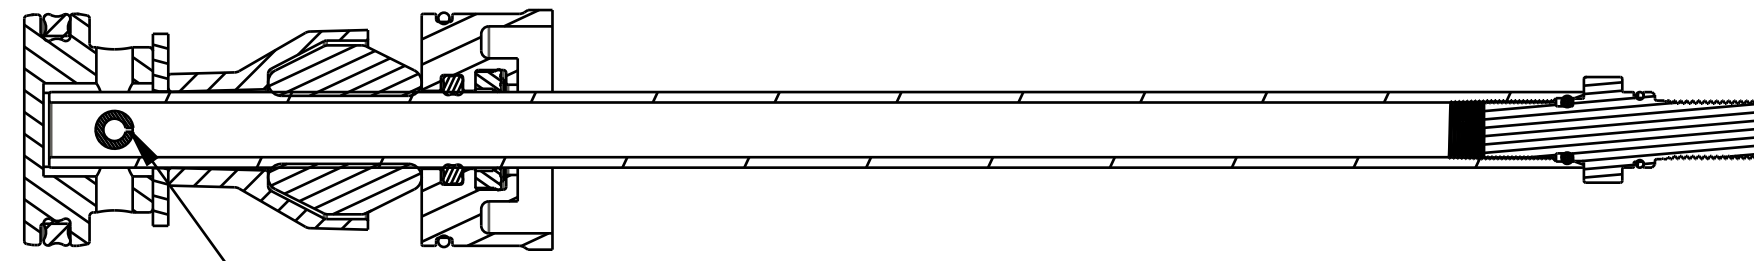

IMPORTANT:  
ORIENT GAP IN PIN TOWARDS  
TOPOUT SPACER ±15°

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

234-04-655  
Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

234-04-629  
Topout Bumper, FLOAT NA

029-08-060

029-08-022

TORQUE:  
50±5 IN LB

GREASE:  
THIN LAYER  
OF SLICK HONEY

234-04-738  
Topout Spacer, FLOAT NA 2, 0.040" Thick, Aluminum

LOCTITE:  
1-2 DROPS  
RED 262

820-02-540-KIT  
Neg Plate Subassembly, 2019 FLOAT LC NA 2, 34 SC, 1.214 Bore, Aluminum

035-00-213  
Seals: Q-Ring [(-213) .139 C.S. X 0.921 ID]

222-01-333  
Piston, FLOAT NA 2 LC, 34, 1.214 Bore

SHAFT

IMPORTANT:  
PRESS PIN UNTIL CENTERED

060-01-010  
Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

IMPORTANT:  
VERIFY SEAL IS NOT  
TWISTED AFTER INSTALL

**FOX Factory, Inc.**  
130 Hangar Way, Watsonville, CA 95076 USA  
Ph 831-768-1100 Fax 831-768-9312

TITLE  
**2020 34 SC FLOAT NA2  
Air Shaft Assemblies**

PROPRIETARY  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

SIZE DWG. NO.  
**C**

PLOT SCALE 1:1:1 SHEET 1 OF 1