


4

3

2

1

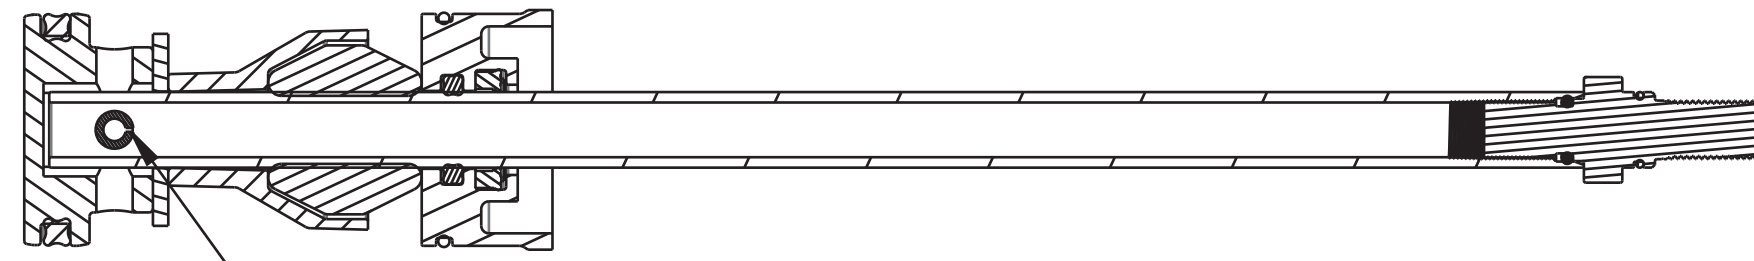

! IMPORTANT:  
ORIENT GAP IN PIN TOWARDS  
TOPOUT SPACER ±15°

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

Topout Bumper, FLOAT NA

Topout Spacer, FLOAT NA 2, 0.040" Thick, Aluminum

TORQUE:  
50±5 IN LB

GREASE:  
THIN LAYER  
OF SLICK HONEY

Seals: Q-Ring [(-212) 0.139 C.S. X 0.859 ID]

PISTON

LOCTITE:  
1-2 DROPS  
RED 263

Topout Spacer  
(130mm/140mm only)

AIR SHAFT

! IMPORTANT:  
PRESS PIN UNTIL CENTERED

NEG PLATE SUBASSEMBLIES:  
820-02-409-KIT: Neg Plate Subassembly, 2018 FLOAT LC NA 2, 32, Short Travel, 1.110 Bore  
820-02-411-KIT: Neg Plate Subassembly, 2018 FLOAT LC NA 2, 32, Long Travel, 1.110 Bore (130mm/140mm only)

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

! IMPORTANT:  
VERIFY SEAL IS NOT  
TWISTED AFTER INSTALL

**FOX** **FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2021 32 FLOAT NA2  
AIR SHAFT ASSEMBLIES**

SIZE DWG. NO.

**C**

PLOT SCALE 1:1:1

SHEET 1 OF 1

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1

ProE ASSEM