


4

3

2

1

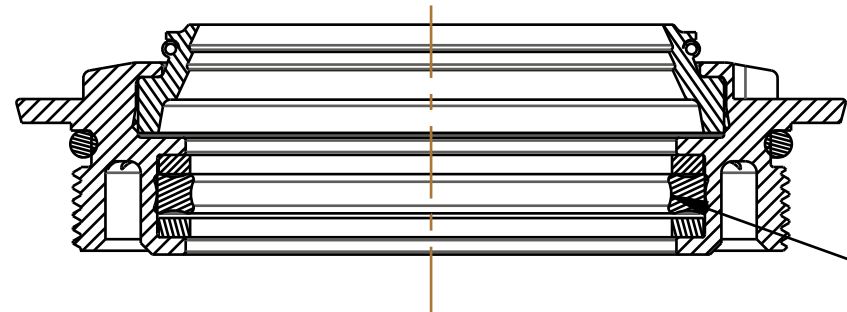







! IMPORTANT:
ENSURE QUAD RING
IS NOT TWISTED

SECTION C-C

GREASE:
THIN LAYER
SLICK HONEY

GREASE:
THIN LAYER
SLICK HONEY

GREASE:
THIN LAYER
SLICK HONEY

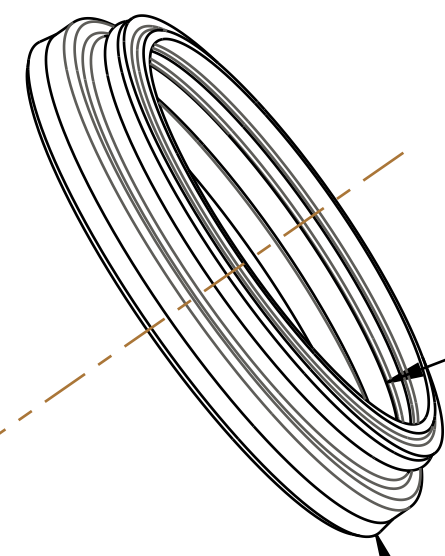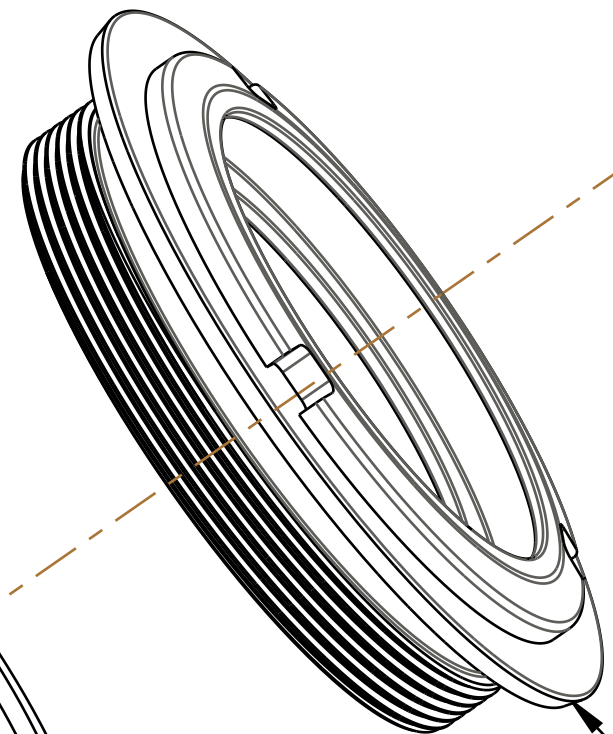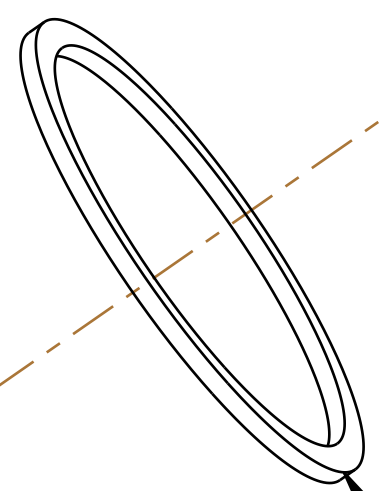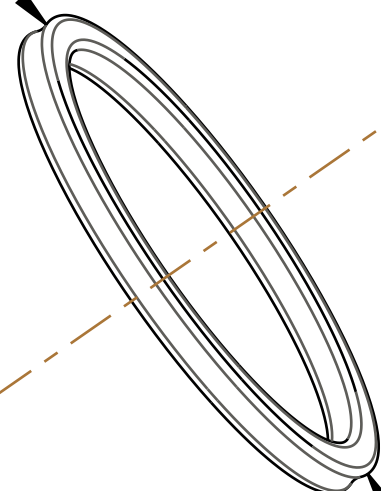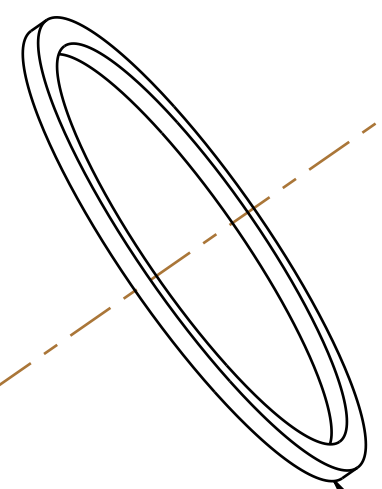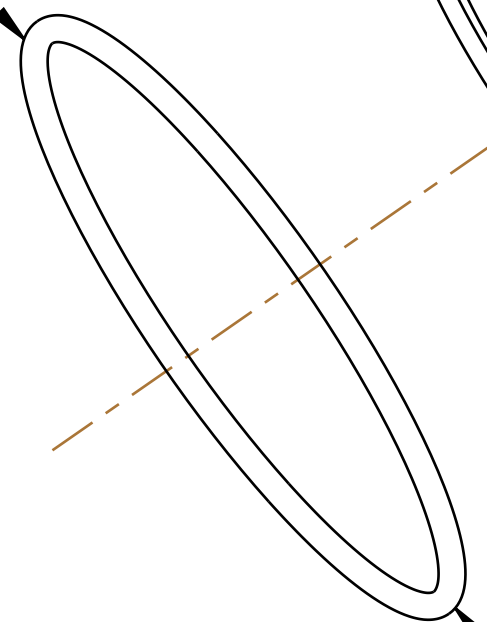

O-Ring (-031) [.070 C.S. X 1.739 ID]

Bearing: Back Up Ring [Ø 1.060 Shaft]

Seals: Q-Ring [(-124) .103 C.S. X 1.237 ID], N-70, Dynamic

Bearing: Back Up Ring [Ø 1.060 Shaft]

Bearing Housing, 2021 Float X2, Neg Air

Seals: Scraper, Special Rod Wiper [Ø1.25 Body]

FOX FOX Factory, Inc. Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE Bearing Assy: Negative
Air Sealhead, 2021 FX2

SIZE DWG. NO. **C** 812-06-106-KIT

PLOT SCALE 2:1 SHEET 1 OF 1

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM