


4

3

2

1

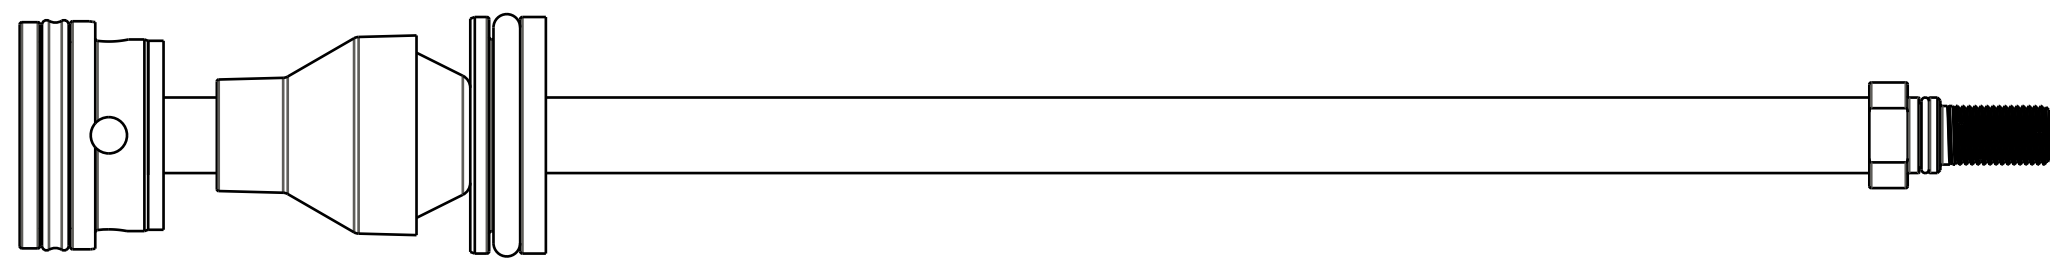

Seals: O-Ring [8.0MM ID x 1.0MM CS] Metric, N-70, Static

Base Stud: Float, 0.305-48 Thread

Seals: O-Ring [6.0mm ID x 1.5mm CS] Metric, N-70, Static

TORQUE:
50±5 IN.LB.

LOCTITE:
RED 263, 2-3 DROPS
OR ON FEMALE THREAD

GREASE:
THIN LAYER
OF SLICK HONEY

820-02-368-KIT
Neg Plate Subassembly, FLOAT 34, Rhythm

IMPORTANT:
GROOVE FACES
PISTON

Topout Bumper, FLOAT NA

Topout Spacer, Float, Rhythm

GREASE:
THIN LAYER
OF SLICK HONEY

SHAFT

Fastener, Standard: Flat Washer [10mm ID X 26 OD]

IMPORTANT:
PRESS PIN
UNTIL CENTERED

Pin: Spring [Ø 0.188 X 0.875 TLG] Spring Steel, Zinc

PISTON, 34 FLOAT,

SEAL: O-RING

IMPORTANT:
VERIFY SEAL IS NOT
TWISTED AFTER INSTALL

		FOX Factory, Inc. 130 Hangar Way, Watsonville, CA 95076 USA Ph 831-768-1100 Fax 831-768-9312
TITLE 2021 34 RHYTHM FLOAT NA2 AIR SHAFT ASSEMBLIES		
SIZE C	DWG. NO.	PLOT SCALE .00 : 1
		SHEET 1 OF 1

- PROPRIETARY -
 THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
 THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
 FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

1

ProE ASSEM