

4

3

2

1

Compression Piston Clamp, FIT4, Lightweight

Valve: Metric [15mm OD X 8mm ID X .15mm]

Spring, Comp. Check

Valve: [.600 OD X 0.377 ID X 0.012 TH]

Retaining Ring: Snap, Smalley, Internal, VH-62 , Ø.610 Bore

OIL:  
THIN LAYER OF FOX MX5 DAMPER OIL  
ON OD AND ID

IMPORTANT:  
THIN VALVE FACES  
COMPRESSION CLAMP

IMPORTANT:  
SMALL DIAMETER OF SPRING  
FACES COMPRESSION CLAMP

IMPORTANT:  
THICKER VALVE FACES  
RETAINING RING

IMPORTANT:  
ENSURE RETAINING RING  
FULLY SEATED FULL 360 DEG


PRESSURE TUBE

BLADDER

Lower Bladder Ring, Snap Ring, 011 RC2

Bladder retainer, 011 RC2

Retaining Ring: Snap, Smalley, Internal, Custom, Ø.923 BORE

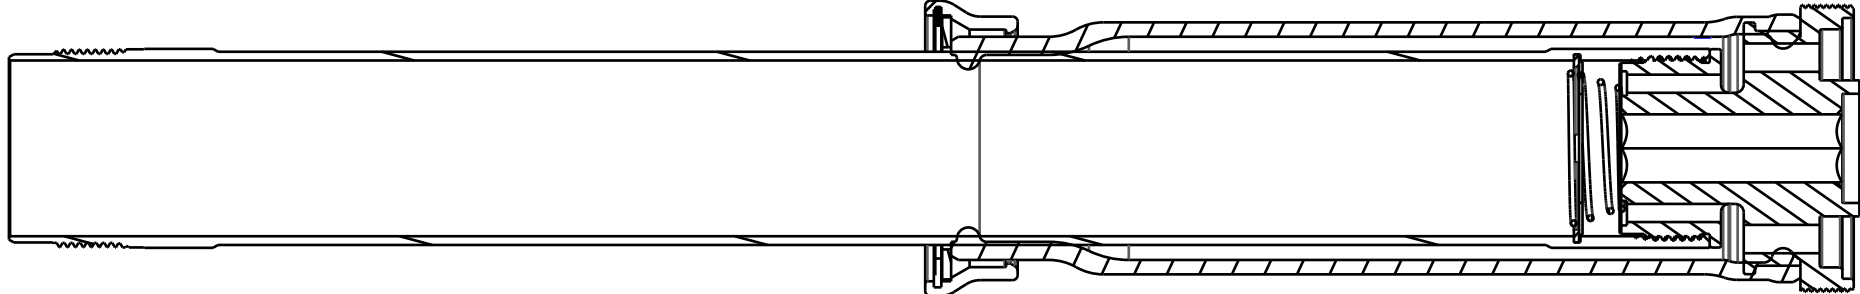

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** FOX Factory, Inc. Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
2020 36 FIT4 8mm, Bladder Assy

SIZE DWG. NO. **C** 820-03-609-KIT

PLOT SCALE | .50:1 | SHEET 1 OF 1

4

3

2

1

ProE ASSEM