

4

3

2

1

Retaining Ring: Wire [1.280 OD X .024 CS] SS

Compression Adjust Coupler, F-S, FIT4

ASSEMBLE AT THIS LEVEL

820-05-653-KIT
2021 38 FIT4 E-Bike Topcap Assy, Remote,
Black Ano, U-Cup, 2 Pos Adj, PTL

TORQUE:
55±5 IN LBS

820-03-606-KIT
2020 36 FIT4 8mm Damper Shaft Assy

TORQUE:
55±5 IN LBS

820-03-627-KIT
2021 38 FIT4 8mm, Bladder Assy


Seals: O-Ring [3.0MM ID x 1.5MM CS] Metric, N-70, Static

Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

Ball [Ø.1094]

GREASE:
THIN LAYER OF
SLICK HONEY ON BALL

ASSEMBLE THESE PARTS AFTER OIL FILL

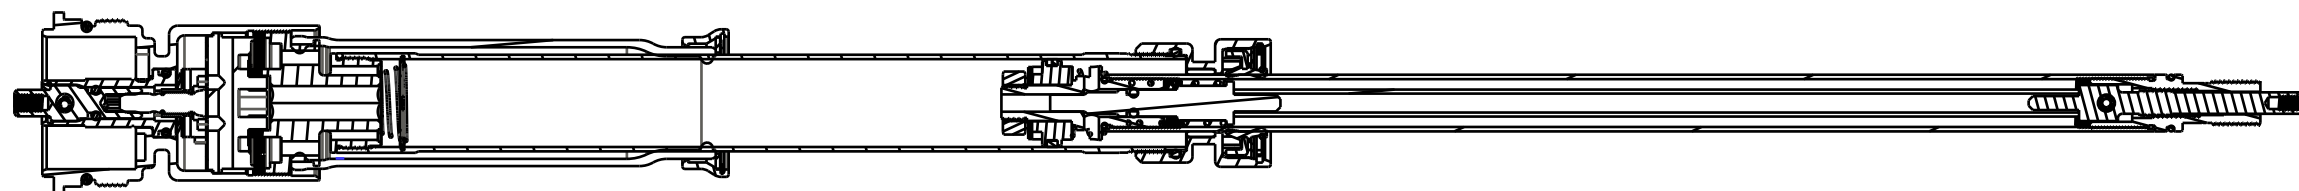

SECTION A-A
SCALE 0.750

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX **FOX Factory, Inc.** Ph 831-768-1100
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE
**2021 38 180 Max FIT4 E-Bike, Remote,
Cart Assy, Black Ano, PTL 2 Pos Adj**

SIZE DWG. NO.

C

PLOT SCALE 1.0:1

SHEET 1 OF 1

PrøE ASSEM

4

3

2

1