


4

3

2

1

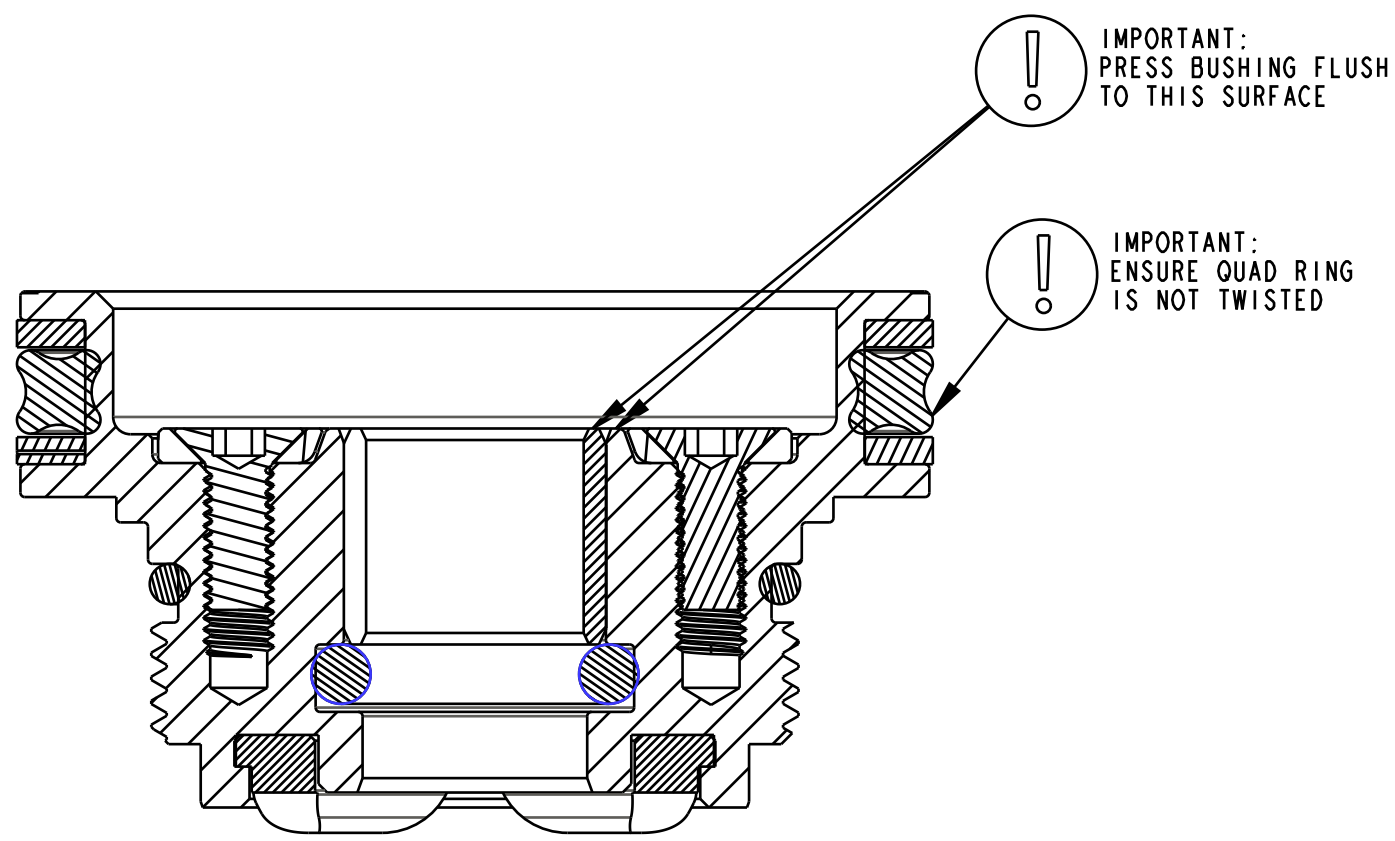

SECTION A-A  
SCALE 3:1

GREASE: THIN LAYER OF SLICK HONEY

TORQUE:  $10 \pm 2$  IN-LB

Travel Spacer Assembly

Bearing: Backup Ring, External, [ $\emptyset$  1.600 Bore]

Seal, Custom, O-Ring, X2 Air Piston, LTS

Bearing: Backup Ring, External, [ $\emptyset$  1.600 Bore]

Bearing: Internal [ $\emptyset$ .375 Shaft x .457 OD, .375 TLG]

Bearing Housing: 2021 FX2, Black [1.25 Body, 1.60 Air Sleeve,  $\emptyset$ .375 Shaft]

O-Ring [(-110) 0.103 C.S. X 0.362 ID]

Seals: O-Ring [(-022) .070 C.S. X 0.989 ID] Standard, Polyurethane Parker 4300/9

Bumper: T/O [ $\emptyset$  0.375 Shaft, 0.100 TLG] Nitrile, 60A

GREASE: THIN LAYER OF SLICK HONEY

GREASE: THIN LAYER OF SLICK HONEY

|  |          |                          |                                     |
|--|----------|--------------------------|-------------------------------------|
|  |          | <b>FOX Factory, Inc.</b> | Ph 831-768-1100<br>Fax 831-768-9312 |
| 130 Hangar Way, Watsonville, CA 95076 USA                            |          |                          |                                     |
| TITLE<br>Bearing Assy: 2021 FX2, [.940 Bore, 1.600 Bore, .375 Shaft] |          |                          |                                     |
| SIZE   | DWG. NO. | 812-06-105-KIT           |                                     |
| C  |          |                          |                                     |
| PLOT SCALE   | 2:1      | SHEET 1 OF 1             |                                     |

PROPRIETARY - THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

4

3

2

ProE ASSEM