

4

3

2

1

D

D

C

C

B

B

A

A

ASSEMBLE 002-02-011 AT THIS LEVEL

Retaining Ring: Wire [.280 OD X .024 CS] SS

Compression Adjust Coupler, F-S, FIT4

820-05-691-KIT  
2022 32 TC FIT4 Topcap Assy, 3 Pos Adj

TORQUE:  
55±5 IN LBS

820-03-684-KIT  
2022 32 50mm Max FIT4  
Damper Shaft Assy, 8mm Shaft

TORQUE:  
55±5 IN LBS

820-03-686-KIT  
2022 32 TC 50mm Max FIT4 Lightweight Bladder Assy

Seals: O-Ring [3.0MM ID x 1.5MM CS] Metric, N-70, Static


Spring: Detent [.138 TLG, .087 OD, 48 lb/in]

Ball [Ø.1094]

GREASE:  
THIN LAYER OF  
SLICK HONEY ON BALL

ASSEMBLE THESE PARTS AFTER OIL FILL

50mm Travel TLG is 10.967"

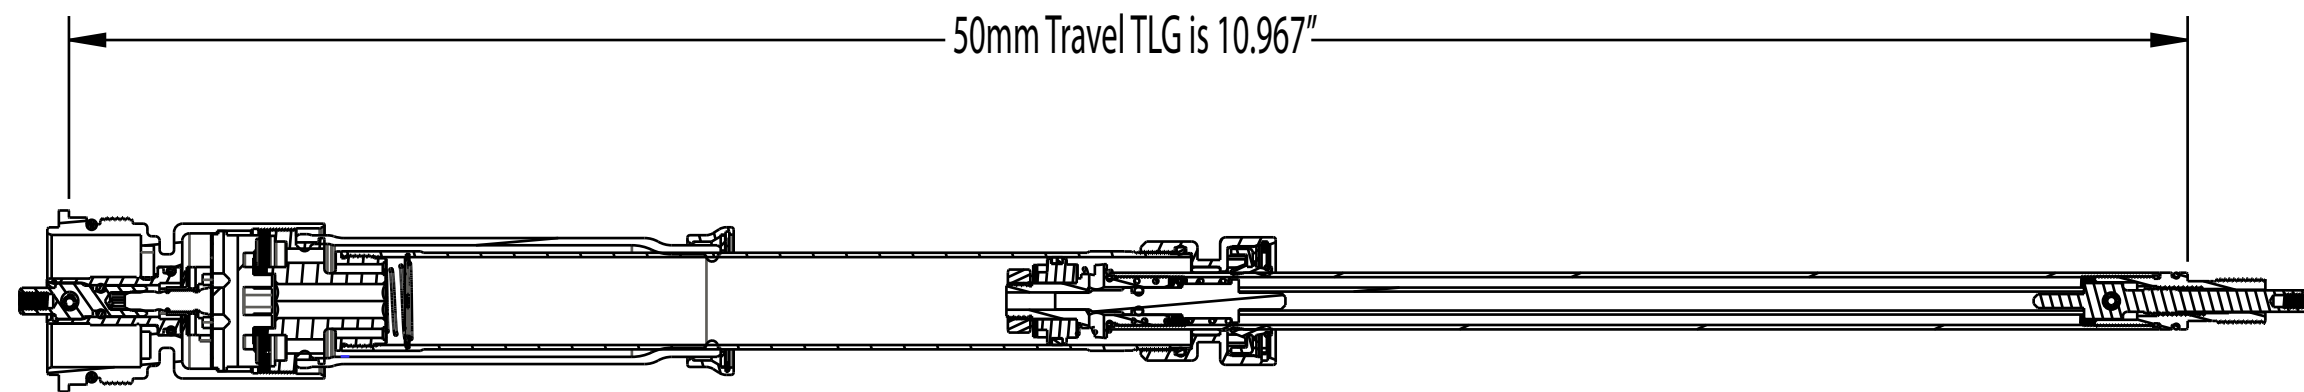

SECTION A-A  
SCALE 0.750

- PROPRIETARY -  
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION  
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE  
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

**FOX** **FOX Factory, Inc.** Ph 831-768-1100  
130 Hangar Way, Watsonville, CA 95076 USA Fax 831-768-9312

TITLE  
**2022 32 TC 50mm Max  
FIT4 3 Pos Adj Cart Assy**

SIZE DWG. NO.

**C**

PLOT SCALE 1.0:1

SHEET 1 OF 1

4

3

2

1

Pr oE ASSEM