

4

3

2

1

Compression Piston Clamp, FIT4, Lightweight

Valve: Metric [15mm OD X 8mm ID X .15mm]

Spring, Comp. Check

Valve: [.600 OD X 0.377 ID X 0.012 TH]

Retaining Ring: Snap, Smalley, Internal, VH-62 , Ø.610 Bore

OIL:
THIN LAYER OF FOX
DAMPER OIL ON OD AND ID

IMPORTANT:
THIN VALVE FACES
COMPRESSION CLAMP

IMPORTANT:
SMALL DIAMETER OF SPRING
FACES COMPRESSION CLAMP

IMPORTANT:
THICKER VALVE FACES
RETAINING RING

IMPORTANT:
ENSURE RETAINING RING
FULLY SEATED FULL 360 DEG


PRESSURE TUBE

BLADDER

Lower Bladder Ring, Snap Ring, 011 RC2

Bladder retainer, 011 RC2

Retaining Ring: Snap, Smalley, Internal, Custom, Ø.923 BORE

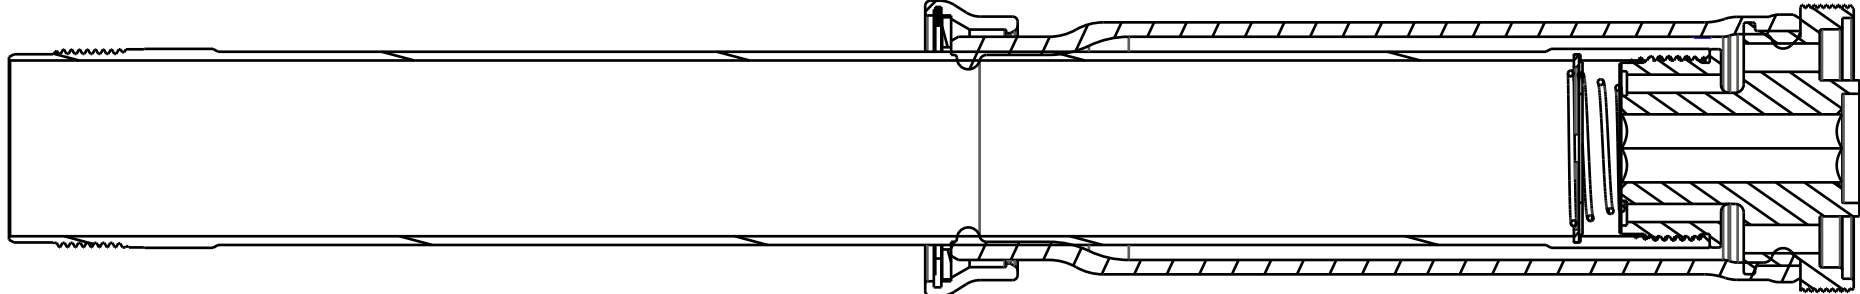

- PROPRIETARY -
THIS DOCUMENT CONTAINS CONFIDENTIAL, PROPRIETARY INFORMATION
THAT IS FOX PROPERTY. DO NOT DISCLOSE TO OR DUPLICATE
FOR OTHERS EXCEPT AS AUTHORIZED BY FOX.

FOX **FOX Factory, Inc.**
130 Hangar Way, Watsonville, CA 95076 USA
Ph 831-768-1100 Fax 831-768-9312

TITLE
**2022 32 TC 50mm Max
FIT4 Lightweight Bladder Assy**

SIZE DWG. NO.
C 820-03-686-KIT

PLOT SCALE | .50 : 1 | SHEET | OF |

ProE ASSEM

4

3

2

1